

- Slip Resistant
- Waterproof from above & below
- Easy to fit

## The ultimate flooring solution from Gerflor.

Gerflor's new generation of slip resistant safety flooring for the home with patented polyester backing system. The textile type backing gives better sound insulation & heat retention than ordinary 3mm vinyl flooring.

Exceptionally stylish, practical and easy to clean Griptex Palette offers a range of plain designs and colours making it ideal for any room in the home. The surface layer of Griptex Palette is slightly roughened with GripX surface technology.

The surface is rated to the high industrial standard of R10 (HSE rating  $\geq 36$ ) which helps to prevent slips & falls even when wet. GripX surface technology does not mean you will not fall down - but it is less likely.



GUARANTEE

### Slip Resistant Surface (R10 Rated)


- R10 rated GripX slip resistant technology
- Hygienic & easy to clean PU surface coating
- Helps stop the spread of dirt & bacteria

### Waterproof Interlayer


- Waterproof from above & below
- Gives dimensional stability
- Helps smooth unevenness in the subfloors

### Patented polyester textile backing


- Sound insulating: 16dB rating
- Warm to the touch
- Can be fitted over most existing smooth floorcoverings
- Can be 'loose laid' up to 22m<sup>2</sup>
- Anti-mildew bonding layer
- Reduces installation time, inconvenience & cost.

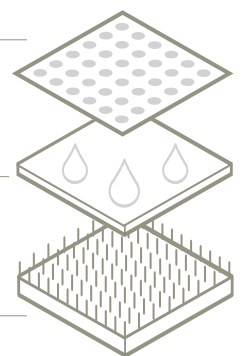

# The ultimate flooring solution from Gerflor



1120 Spike Grey



1081 Spike Brown



1145 Spike Blue




1144 Spike Beige




1121 Spike Red



1010 Calvi Terre



1105 Biarritz Blanc



1107 Biarritz Noir



1010 Calvi Terre



1011 Calvi Sable



1013 Calvi Noir



0176 Rustic White



0161 Rustic Mastic



0130 Rustic Dark Grey



0123 Rustic Beige



0126 Rustic Blue




0142 Rustic Green



0134 Rustic Earth




0570 Silice Dune



0564 Capella White

## Griptex Palette Specification

	<b>Total thickness:</b>	EN 428	ca. 3.00 mm
	<b>Wear layer:</b>	EN 429	ca. 0.25 mm
	<b>Surface finish:</b>	N/A	GripX
	<b>Backing:</b>	N/A	Polyester textile
	<b>Width:</b>	EN 426	2 / 3 / 4 m
	<b>Length:</b>	EN 426	15 / 25 m
	<b>Weight:</b>	EN 430	ca.2170 g/m <sup>2</sup> (M3/B1)
	<b>Fire classification:</b>	EN ISO 9239-1	Cfl.S1
	<b>Guarantee:</b>	N/A	10 years
	<b>Colour Fastness:</b>	EN 20105-B02	≥ 6 °
	<b>Sound Insulation:</b>	ISO 140-8	16 dB
	<b>Scratch Resist:</b>	EN 660/1	group T
	<b>Slip Resistance:</b>	DIN 51130	R10 class
	22		

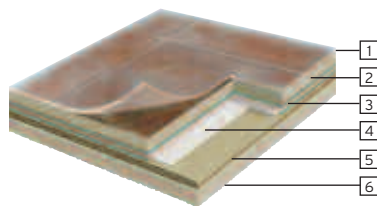

1. Clear PVC wearlayer with special GripX surface.
2. Decorative surface layer.
3. Compact backing foam.
4. Glass fibre mat.
5. Anti-mildew bonding layer.
6. 100% polyester textile layer.

Width codes:

2m - 1369 3m - 1649 4m - 1549

Due to printing limitations there may be variations between colours of the actual flooring and the samples shown on this document.

### Gerflor UK:

Wednock House, Wednock Lane,  
Warwick, CV34 5AP,  
Tel: 01926 401500, Fax: 01926 401651,  
email: residential@gerflor.com

### Gerflor IRL:

Tel: 042-96 61431, Fax: 042-96 61759,  
email: residentialirl@gerflor.com



**Gerflor**

Floors to match your imagination