
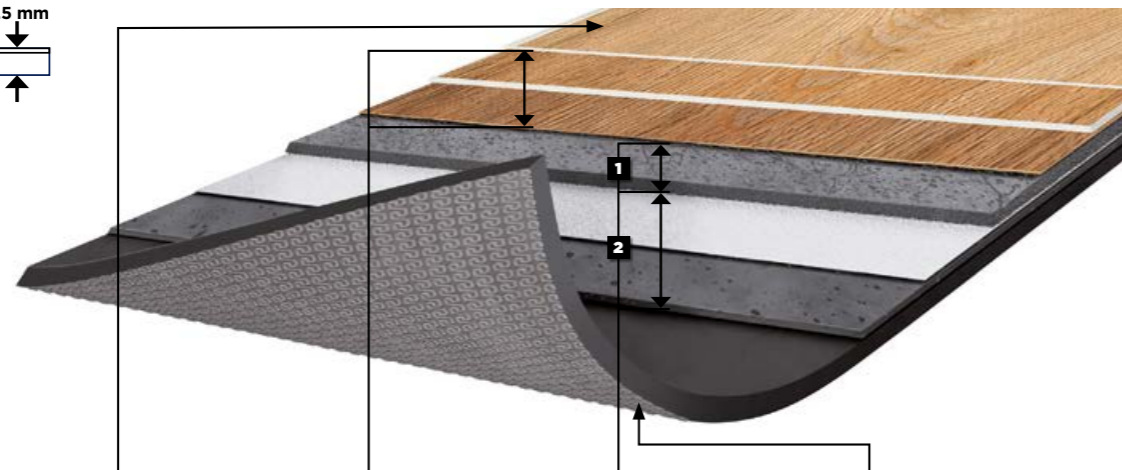


LUXURY VINYL TILE

CREATION 55 LOOSELAY New

▶ CREATION 55 LOOSELAY



PUR+ MATT



Easy maintenance

4D DESIGN

STRUCTURED EMBOSS



Ultra realistic surface

MATT SURFACE



Natural look

CRISTAL WEAR LAYER



High definition design & color

MIX&MATCH DESIGNS



Easy mix & match of designs & formats

DUO CORE TECHNOLOGY

1 RESILIENT COMFORT CORE




Noise absorption



Soft underfoot

2 RIGID CORE



The best stability
Fiber glass inside



Renovation ceramic
4 mm joint



No adhesive up to
30 m²

GRIP-WAVE BACKLAYER

ANTI-SKID BACKING



Super strong suction to the subfloor

Air circulation:
better acoustic

Humidity circulation:
moisture resistance




Easily removable:
renovation

Please refer to Gerflor's installation guidelines

QUICK & EASY TO INSTALL



Installation with Tackifier



Apply Planks or Tiles




Pressure Roller



Easy to Repair

CREATION 55 LOOSELAY New




CREATION 55 LOOSELAY are synthetic, decorative, flexible, antistatic, abrasion group T floorcoverings available in tiles and planks. They consist in a 0.55 mm thick transparent wear layer, a design film and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The overall thickness is 4.5 mm. It also includes anti-skid backing to allow an easy installation and a glue-free installation up to 30sqm.

They benefit from a cross-linked polyurethane surface treatment (**PUR+ MATT**), making maintenance easier and eliminating the need for initial polishes.

CREATION 55 LOOSELAY is a loose lay floorcovering, resistant to use (commercial / industrial use) of 33 / 42 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1.

CREATION 55 LOOSELAY is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant. The product emission rate of organic compounds is < 10µg/m³ (TVOC <28 days - ISO 16000-6).

EXPLORE THE WORLD OF POSSIBILITIES

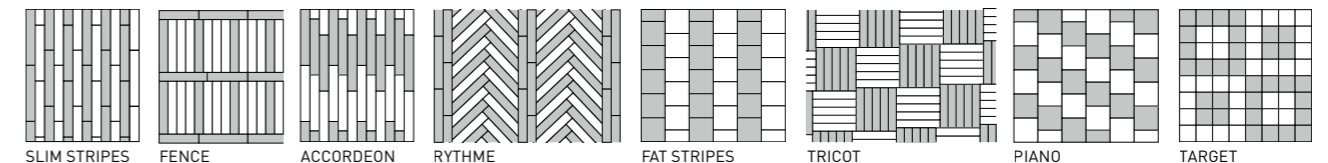

| | | | CREATION 55 LOOSELAY |
|---|--------------------------|---------|-----------------------|
| DESCRIPTION | | | |
| Total thickness | EN ISO 24346 [EN 428] | mm | 4.50 |
| Thickness of wearlayer | EN ISO 24340 [EN 429] | mm | 0.55 |
| Weight | EN ISO 23997 [EN 430] | g/sq.m | 7500 |
| Plank size | EN ISO 24342 [EN 427] | mm | 229x1219 |
| Tile size | EN ISO 24342 [EN 427] | mm | 500x500 |
| CLASSIFICATION | | | |
| Norm / Product specification | - | - | EN ISO 10582 [EN 649] |
| European classification | EN ISO 10874 [EN 685] | class | 33-42 |
| Fire rating | EN 13501-1 | class | Bfl-s1 |
| Static electrical propensity | EN 1815 | kV | < 2 |
| Slip resistance wet: ramp test with oil | DIN 51 130 | class | R10 |
| PERFORMANCES | | | |
| Wear resistance | EN 660.2 | mm³ | ≤ 2.0 |
| Wear group | NF 189 | group | T |
| Type Binder content | ISO 10582 | type | I |
| Room impact | NF S 31074 | dB | 73 |
| Room sound insulation | EN ISO 717-2 | dB | 7 |
| Dimensional stability | EN ISO 23999 [EN 434] | % | ≤ 0.10 |
| Residual indentation | EN ISO 24343-1 [EN 433] | mm | ≤ 0.10 |
| Castor chair test (type W) | ISO 4918 [EN 425] | - | OK |
| Thermal conductivity | EN ISO 10456 [EN 12 524] | W/(m.k) | 0.25 |
| Colour fastness | EN 20 105 - B02 | degree | ≥ 6 |
| Surface treatment | - | - | PUR+ Matt |
| Chemical products resistance | EN ISO 26987 [EN 423] | - | OK |
| ENVIRONMENT / INDOOR AIR QUALITY | | | |
| TVOC after 28 days | ISO 16000-6 | µg / m³ | <10 |
| CE MARKING | | | |
| CE | EN 14041 | | |