
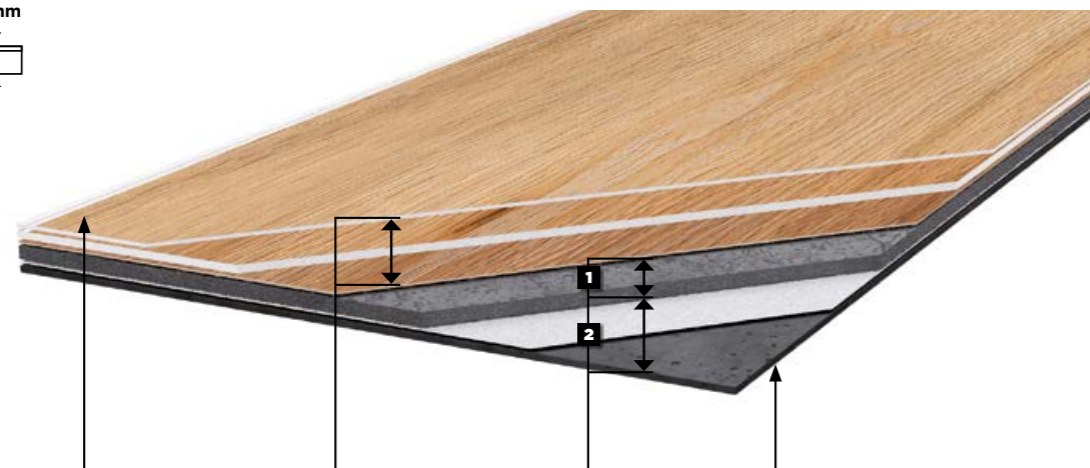


LUXURY VINYL TILE


CREATION 55 New: Available in January 2019

▶ CREATION 55




PUR+ MATT	4D DESIGN	DUO CORE TECHNOLOGY	DIAMOND BACKLAYER
 Easy maintenance	STRUCTURED EMBOSS & BEVEL Ultra realistic surface MATT SURFACE Natural look CRISTAL WEAR LAYER High definition design & color MIX&MATCH DESIGNS Easy mix&match of designs & formats	1 RESILIENT COMFORT CORE Noise absorption Soft underfoot 2 RIGID CORE The best stability Fiber glass inside* <small>*Creation 55 Trend</small>	BODY & STRENGTH Easy handling BACK EMBOSS Better subfloor adhesion Easy positioning

Please refer to Gerflor's installation guidelines

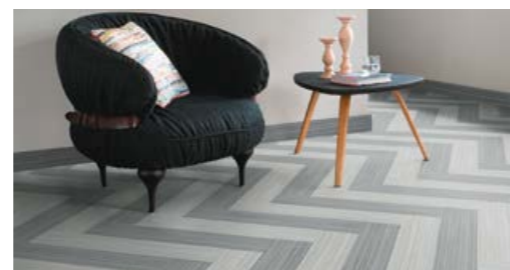

Underlay Gerflor Smart Fix
More details on gerflor.com

CREATION 55 New: Available in January 2019



CREATION 55 TREND are synthetic, decorative, flexible, antistatic abrasion group T floorcoverings available in tile or plank, with bevelled edges. They consist in a 0.55 mm thick transparent wear layer, a design film and a Duo Core Technology, made with a rigid core back layer reinforced with a fiber veil, combined with a flexible core top layer to provide softness and comfort surface. The overall thickness is 2.5 mm. They benefit from a cross-linked polyurethane surface treatment (**PUR+ MATT**), making maintenance easier and eliminating the need for initial polishes.

CREATION 55 TREND is a glued floorcovering, resistant to use (commercial/ industrial use) of 33 / 42 according to EN-ISO 10874 and has B_{fl}-s1 class for smoke emission according to EN 13501-1. **CREATION 55 TREND** is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is REACH compliant. The product emission rate of organic compounds is < 10µg/m³ (TVOC <28 days - ISO 16000-6).

		CREATION 55	
		DESIGN	TREND
DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	2.50
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.55
Weight	EN ISO 23997 (EN 430)	g/sq.m	4410
Size	EN ISO 24342 (EN 427)	mm	Plank - 184x1219 / 230x1500 / 152x762 Tile - 457x914 / 610x610
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	33-42
Fire rating	EN 13501-1	class	B _{fl} -s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R10
PERFORMANCES			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	NF 189	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	77
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.15
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN 12 524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+ Matt
Chemical products resistance	EN ISO 26987 (EN 423)	-	OK
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg / m ³	<10
Certification	-	-	Floorscore®
CE MARKING			
CE	EN 14041		