

Contact us to order free samples

UNITED KINGDOM:
Gerflor Flooring UK Ltd
Park Green, Macclesfield,
Cheshire, SK11 7LZ
Tel: 01625 428922
E-mail: contractuk@gerflor.com


IRELAND:
Gerflor Ltd
Ballybay Road, Co. Monaghan,
A81 YD83, Republic of Ireland
Tel: +353 (0) 42 966 1431
E-mail: gerflorirl@gerflor.com

gerflor.co.uk
gerflor.ie



September 2022

Uniclass
Pr_35_57_71_76
Cl/SfB
(43) Tn6

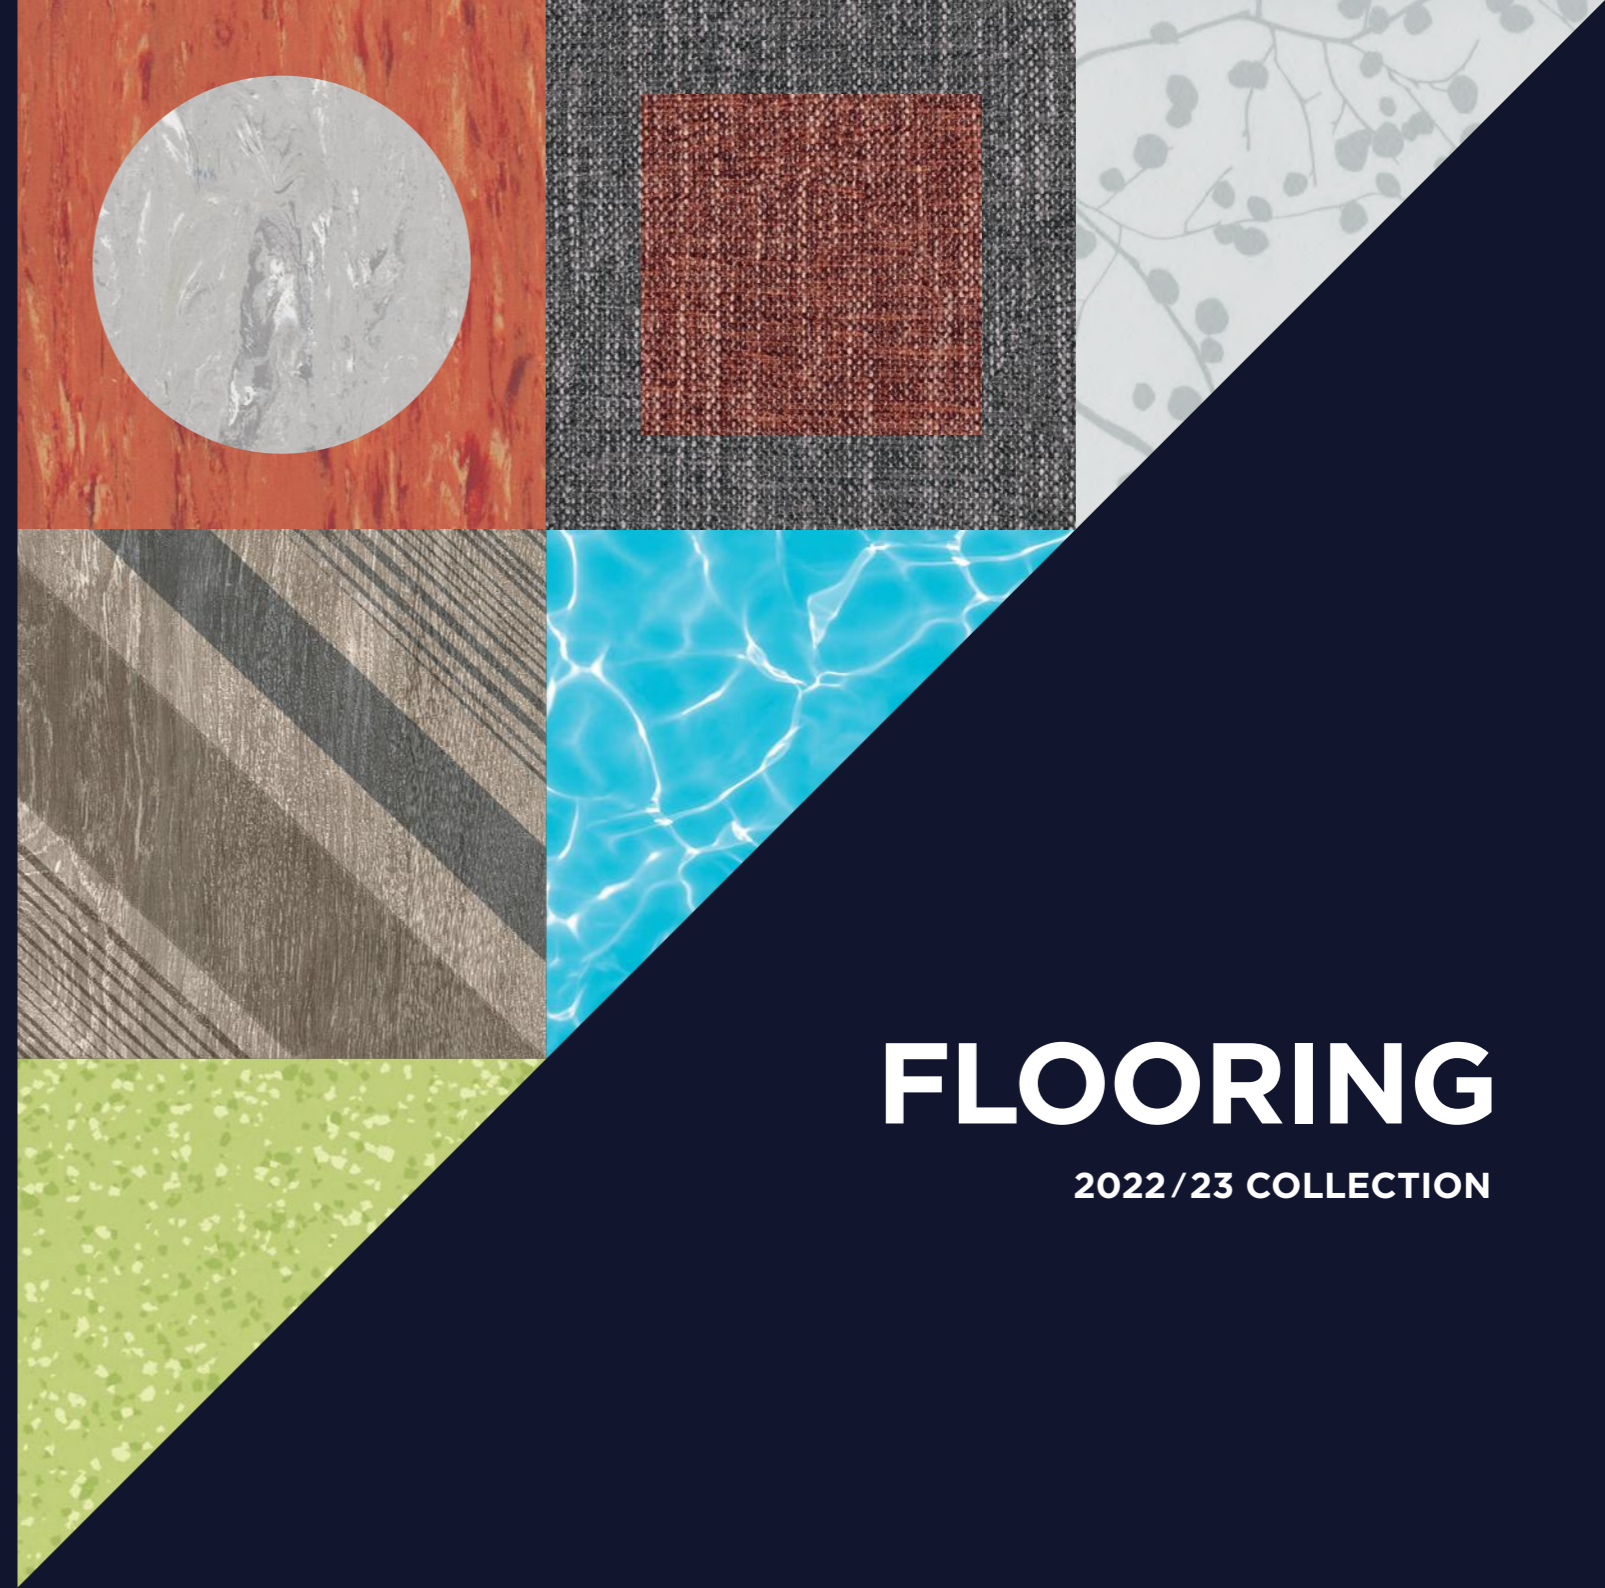

FLOORING

2022/23 COLLECTION

we care / we act Our commitments for a sustainable future



CARBON FOOTPRINT*
-20 % kg CO₂ equivalent/m² between 2020 and 2025



BIOSOURCED CONTENT**
10 % by 2025



RECYCLED CONTENT
30 % by 2025



ADHESIVE FREE***
50 % by 2025



ANNUAL VOLUME RECYCLED
60 000 t by 2025

Gerflor[®]

Gerflor[®]

* Scopes 1 & 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity with adhesive free solutions

WE HAVE SOLUTIONS FOR EVERY SECTOR...


Education




Healthcare



Offices




Retail



Sport & Fitness



Hospitality



Housing



Industry



Quick Delivery



All designs are available for fast delivery from Gerflor to our stockist. Full rolls/packs only. Deliveries to Ireland & the ROI are subject to additional lead times. Contact your local stockist for more information. For details of your local stockist call 01625 428922

Gerflor's key ranges are available as BIM objects



You can download these for free by going to: www.gerflor.co.uk/services-pro/bim.html or by going to the National BIM Library: www.nationalbimlibrary.com/gerflor

All Gerflor BIM objects are available in IFC and Revit.

Disclaimers

Due to printing limitations there may be variations between the colours of the actual flooring and images shown in this document. The technical information contained in this brochure is subject to change at any time due to products being subject continuous improvement processes. Please check latest technical information on our website www.gerflor.co.uk or with a sales advisor prior to ordering.

Contents

Gerflor			
Why Gerflor		2	
Sustainable Future		4	
Fundamentals		6-9	
Contract Safety Flooring		10	
Taralay Impression Control		12	
Tarasafe Ultra / Ultra Comfort		14	
Tarasafe Standard / Plus / Super		16	
Shower Solutions		18	
Tarasafe Ultra H ₂ O		20	
Elegance SD		21	
Mural Calypso		22	
Vinyl Wall Coverings		24	
NEW Mural Ultra Design		26	
Residential Slip Resistant Flooring		28	
Griptex		30	
Texline		32	
Homogeneous Flooring		34	
NEW Mipolam Symbioz™		36	
Mipolam Planet		38	
Mipolam Accord		40	
Mipolam Affinity		42	
Mipolam Cosmo		44	
Mipolam Troplan		45	
Mipolam Classic		46	
Premium Multilayered Flooring		48	
Premium		50-55	
Taralay Multilayered Flooring		56	
Taralay Impression		58-67	
My Taralay		68-71	
Taralay Initial		72-77	
NEW Taralay Libertex		78	
Nerok Multilayered Vinyl Flooring		80	
NEW Nerok		82-85	
Vinyl Sports Flooring		86	
Taraflex® Comfort (P3)		88	
Taraflex® Performance (P2)		90	
Taraflex® Evolution (P1)		92	
Taraflex® Multi-Use (P1)		94	
Taraflex® Recreation (P1)		96	
Taraflex® Surface		98	
My Taraflex®		100	
NEW Modulock Connor Sports®		102	
Outdoor Sports Flooring		104	
Sport Court® PowerGame™ Plus		105	
Rubber Gym Flooring		106	
Powershock		107	
Sports Undercarriage System		108	
NEW Area Elastic Sprung Floor		109	
Luxury Vinyl Tiles & Planks			
Creation 70		110-121	
NEW Creation 55		122-133	
Saga ²		134-137	
Gradus Carpets		138	
Premium Collection			
NEW Lunar		140	
Urban Myth		142-145	
Streetwise Style		146	
Streetwise Design		148	
Cityscene & Brickworks		150	
Times Square		152	
Carezone		154	
SqMile ^{EXEC}		156	
Emphasis		157	
Stratus		158	
Stratus Stripe		159	
Adventurer		160	
Genus & Volnay		161	
High Performance Contractor Collection			
Latour ²		162	
Lafite Connect		164	
Lafite Space		166	
Lafite Plains		168	
Predator		169	
Bodega		170	
Secondary Barrier Matting			
Boulevard 7000		171	
Boulevard Stripe		172	
Boulevard 6000		173	
Boulevard 5000		174	
Boulevard 1500		175	
Fast Track Flooring Tiles		176	
GTI Max		178	
Attraction®		180	
NEW Creation 70 Connect		182	
Compact Linoleum Flooring		184	
DLW Marmorette		186-189	
DLW Colorette		190	
DLW Uni Walton		192	
Finishes			
Weld Rods		195 - 201	
Appendix			
Installation		202	
Maintenance		203-205	
Notes		206	
Website		208	



Key: Compact Plank Comfort Tile Interlocking Tile

Carpet: Tile Plank Roll Impervious

Why Gerflor

Since 1937, Gerflor **has designed, manufactured and distributed design-led, innovative and eco-responsible** floor coverings and wall protection solutions. Present in more than **100 countries**, with **4,200 employees, 29 subsidiaries** and **12 production sites**, Gerflor serves many activity sectors including health, education, residential accommodation and sport.

WORLDWIDE PRESENCE FOR BETTER SERVICE

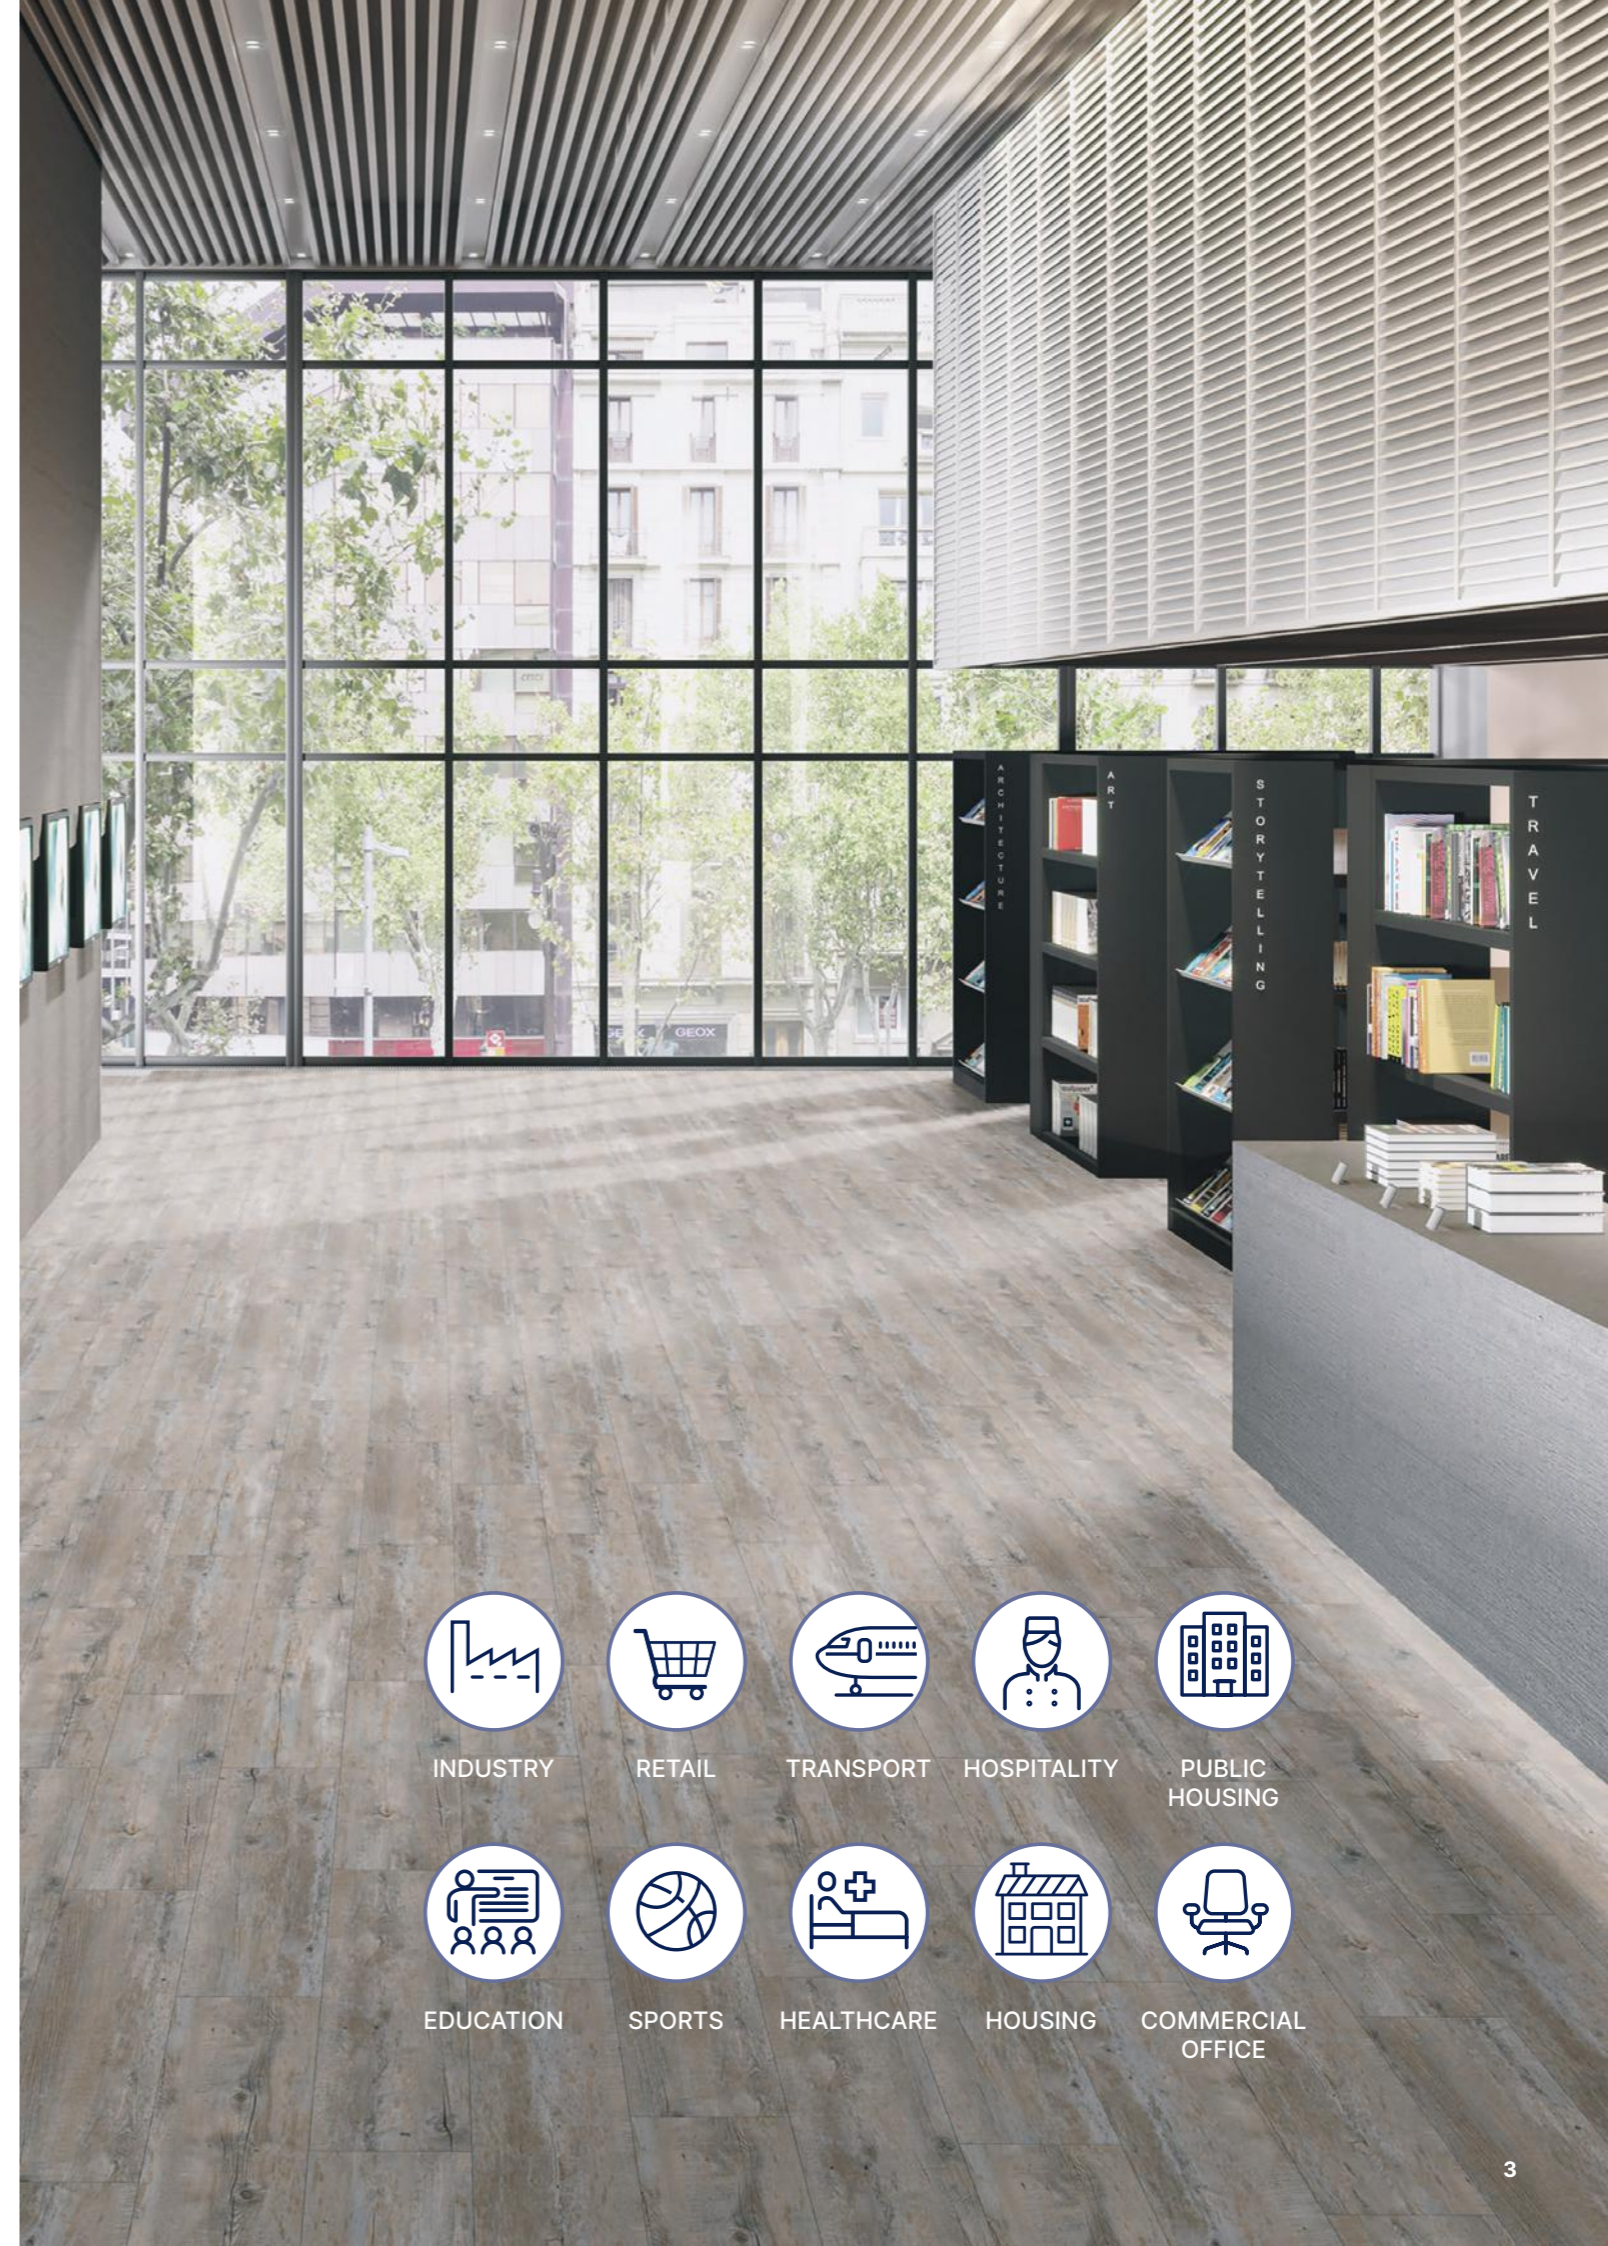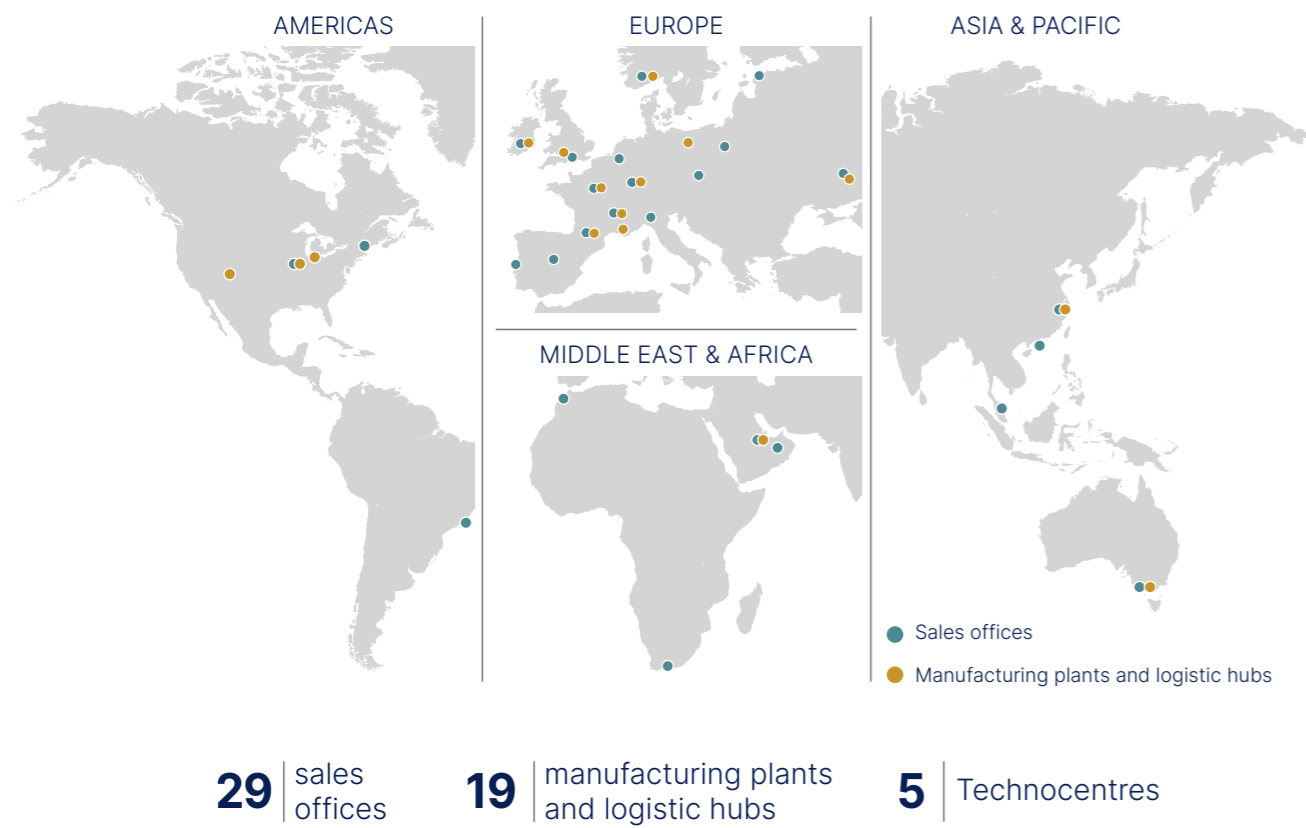

Our commitments for a sustainable future

Gerflor teams have always considered customers and the environment as their absolute priorities. Our floor coverings, wall solutions and finishing components are user friendly, healthy solutions. They are designed with respect for our planet to last as long as possible with proposed end-of-life options. From product design through end-of-life, the circular economy is a core priority for the group. We have determined 5 priority commitments to guide our environmental management up to 2025.

we care | we act

Our commitments for a sustainable future

 CARBON FOOTPRINT* -20% kg CO ₂ equivalent/m ² between 2020 and 2025	 BIOSOURCED CONTENT** 10% by 2025	 RECYCLED CONTENT 30% by 2025	 ADHESIVE FREE*** 35% by 2025	 ANNUAL VOLUME RECYCLED 60,000 t by 2025
<small>* Scopes 1 & 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity with adhesive free solutions</small>				





FUNDAMENTALS

A **FUSION** OF PRODUCTS & VALUES

Gerflor and Gradus offer products which are ideal for use in a wide variety of applications including healthcare, commercial office, education, retail, hospitality & leisure and housing. Products can be combined to provide a complete package that balances performance, aesthetics and cost alongside environmentally responsible manufacturing processes.


A **FRESH** APPROACH

We believe passionately in providing the customer with the very best in terms of service. Through our combined team we can offer expert advice to help with product selection backed up with extensive UK stocks to ensure our products are delivered on-time, every-time.

A NEW LEVEL
OF INNOVATION,
QUALITY, SERVICE
& TEAMWORK



CREATION LVT
TARASAFE
TARAFLEX
TECHNICAL TILES
CARPETS

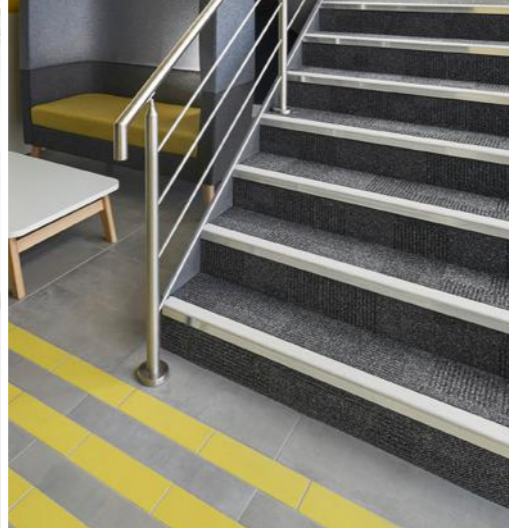




STAIR EDGINGS
FLOOR TRIMS
MATTING
WALL PROTECTION
LIGHTING



NEXT DAY SERVICE
PRODUCT EXPERTISE
WARRANTY
SUSTAINABILITY



HOUSING
RETAIL
HOSPITALITY
TRANSPORT

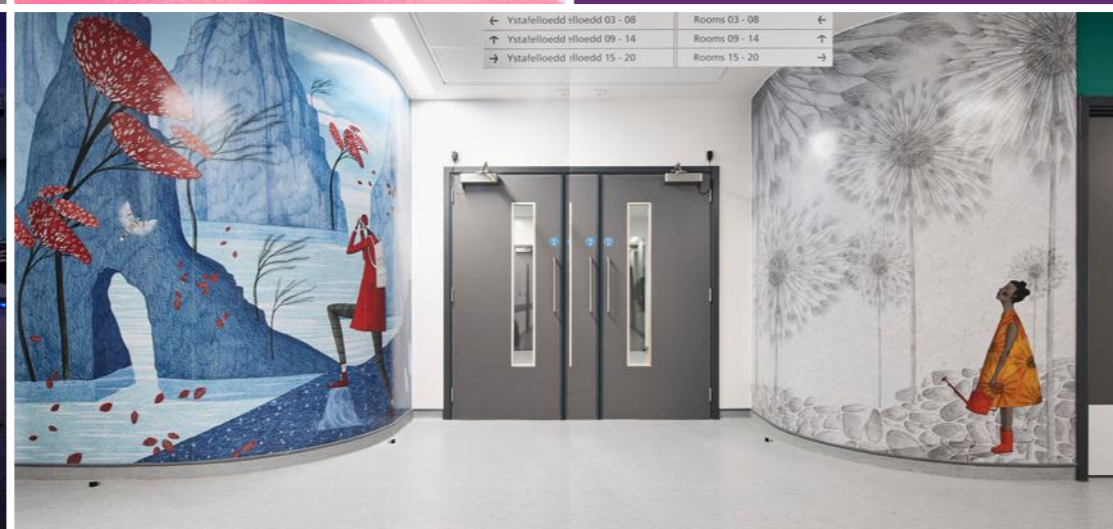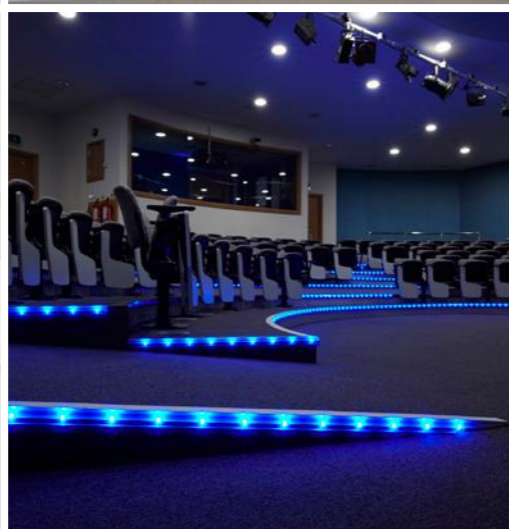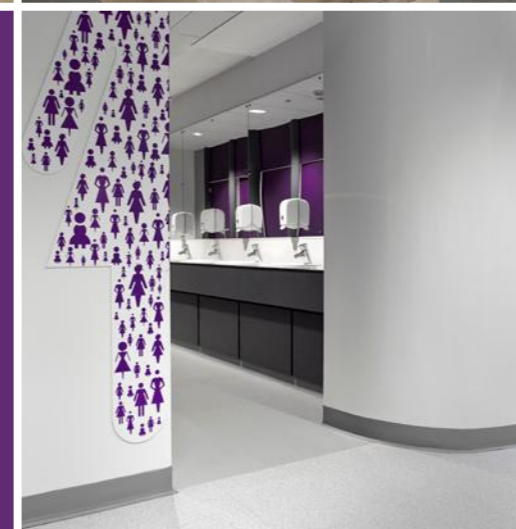

← Ystafelloedd Sfloedd 03 - 08 Rooms 03 - 08 ←
↑ Ystafelloedd Sfloedd 09 - 14 Rooms 09 - 14 ↑
→ Ystafelloedd Sfloedd 15 - 20 Rooms 15 - 20 →



EDUCATION
HEALTHCARE
COMMERCIAL OFFICE
SPORTS

Contract Safety Flooring

Taralay Impression Control is a safety flooring collection ideal for hardworking places and has been developed specifically for an extensive range of contract applications.

If you're looking for inspiration and a tough safety flooring that offers both slip resistance and outstanding performance, then look no further.

A decorative vinyl sheet flooring collection with design-led colourways, it is suitable for healthcare, education, retail, public spaces, offices and other commercial interiors.

It also offers a hygienic solution thanks to a revolutionary UV cured ProtecSol® surface treatment for easy cleaning and maintenance.



Taralay Impression Control safety flooring is ideal for heavy traffic environments in both the contract and housing markets


0038 Pierre

Tarasafe is a range of slip resistant sheet flooring that meets HSE guidelines. Constructed from vinyl with deeply inlaid mineral crystal particles (patent pending) and coloured chips for a decorative design, the range contains no carborundum.

All products in the Tarasafe range are reinforced with a glass fibre grid and are suitable for use in all areas of heavy traffic where slip-resistance, durability and hygienic conditions are required.

A number of products benefit from Sparclean® surface treatment for extreme resistance to soiling and staining.

All Tarasafe floors come with a 12 year warranty and are 100% recyclable, when the product is at the end of its life.



Description	Taralay	Tarasafe								
		Impression Control	Ultra	Ultra Comfort	Standard	Super	Plus	Ultra H ₂ O		
Thickness	EN ISO 24346	mm	2.0	2.0	3.2	2.0	2.2	2.5	2.0	
Wear layer thickness	EN ISO 24340	mm	0.70	0.85	0.85	0.85	1.12	1.14	1.0	
Weight	EN ISO 23997	g/m ²	2635	2460	2960	2460	2880	3090	2400	
Width of sheet	EN ISO 24341	cm	200	200	200	200	200	200	200	
Length of sheet	EN ISO 24341	lm	25	20	20	20	20	20	20	
Classification										
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582	EN 651	EN ISO 10582	EN ISO 10582	EN ISO 10582	EN ISO 10582	
European classification	EN ISO 10874	class	34-43	34-43	34-42	34-43	34-43	34-43	34-43	
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Cfl-s1	
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2	< 2	< 2	< 2	
Slip Resistance										
Pendulum test (dry & wet)	BS 7976-2	PTV/SRV(1)	> 36	> 36	-	> 36	-	-	> 36	
Surface roughness	Rtm/Rz	µm	Rz ≥ 20	Rz ≥ 20	-	Rz ≥ 20	-	-	Rz ≥ 20	
Ramp test with oil	DIN 51130	class	R11	R10	R10	R10	R12	R10	R11	
Ramp test with water	DIN 51097	class	-	B	-	B	-	-	C	
Ramp test	EN 13845 Annexe C	class	-	Esf(2) ESb(3)	-	Esf(2) ESb(3)	-	-	ESb(3)	
Performances										
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	≤ 4.0	
Wear group	NF 189	-	T	T	T	T	T	T	P	
Type binder content	EN ISO 10582	type	I	I	-	I	I	I	I	
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.20	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10	
Residual indentation (measure)	-	mm	≈ 0.03	≈ 0.03	≈ 0.03	≈ 0.05	≈ 0.03	≈ 0.03	-	
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25	0.25	0.25	0.25	
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	
Impact sound insulation	EN ISO 717-2	dB	8	-	16	-	-	-	-	
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	OK	OK	OK	OK	
Anti-bacterial activity (E.coli- S.aureus- MRSA)(4)	ISO 22196	-	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	
Surface treatment	-	-	ProtecSol® Control	SparClean®	SparClean®	PUR	-	-	-	
TVOC after 28 days	ISO 16000-6	µg/m ³	< 70	< 100	< 100	< 100	< 100	< 100	< 100	
CE Marking										
CE		EN 14041				Taralay and Tarasafe have the same certification for: - Static Electricity Propensity - Electrical Resistance - Slip Resistance				

(1) The RRL pendulum wet test: wet is expressed as a Pendulum Test Value (PTV) and a Slip Resistance Value (SRV) to show that the test was carried out using a 4S rubber resistor pad in accordance with HSE guidance.

(2) The Esf (Enhanced Slip) designation shows that this product complies with the EN 13845 shod test.

(3) The Esb (Enhanced Slip) designation shows that this product complies with the EN 13845 barefoot test.

(4) The implementation of an effective cleaning method is the best defence against infection.

Taralay Impression Control


Contract Safety Flooring

- > Tough and durable multipurpose floor covering, ideal for contract applications
- > Slip resistant with a HSE compliant >36 PTV value, >20 Rtm/Rz surface roughness and a R11 ramp test rating
- > A hygienic solution thanks to a revolutionary UV-cured ProtecSol® surface treatment for easy cleaning and maintenance
- > Stunning collection of modern and contemporary designs

Wood



Design

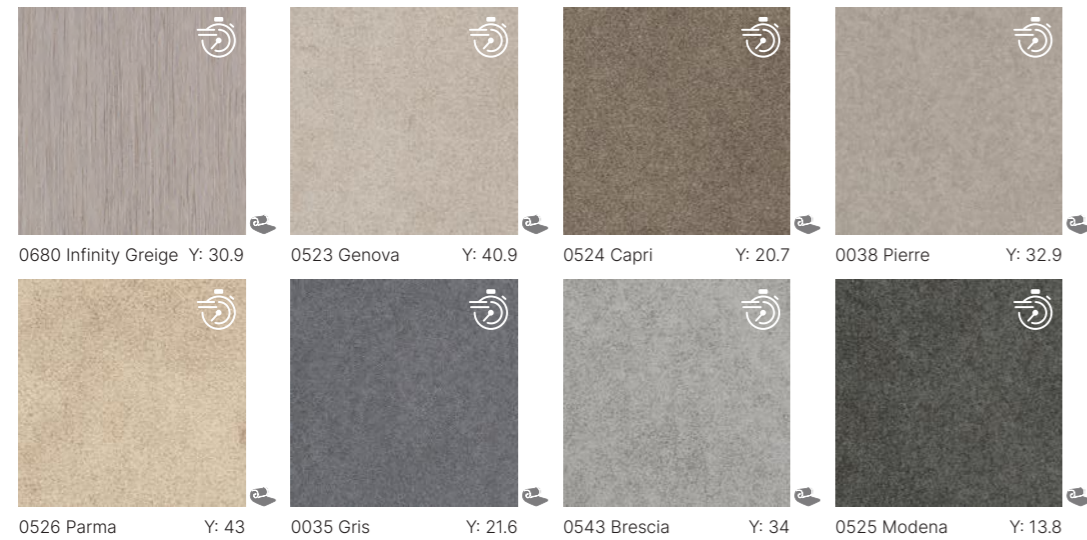

T Wear Group | HSE 36+ Slip Resistant | R11 Slip Resistant | 20 Roughness
RTM / RZ

Compact | ProtecSol® Control | 100% Recyclable | Stocked for quick delivery see inside front cover | Y = Light Reflectance Value (LRV) | Weld Rods see page 195




0371 Noma Rustic

Tarasafe Ultra / Ultra Comfort

Contract Safety Flooring

- > Easy to clean and maintain compacted nonporous surface
- > Enhanced colour, design and brightness of mineral crystal particles
- > Stain and chemical resistant SparClean® surface treatment, no polish for life!
- > Suitable for most contract and commercial applications

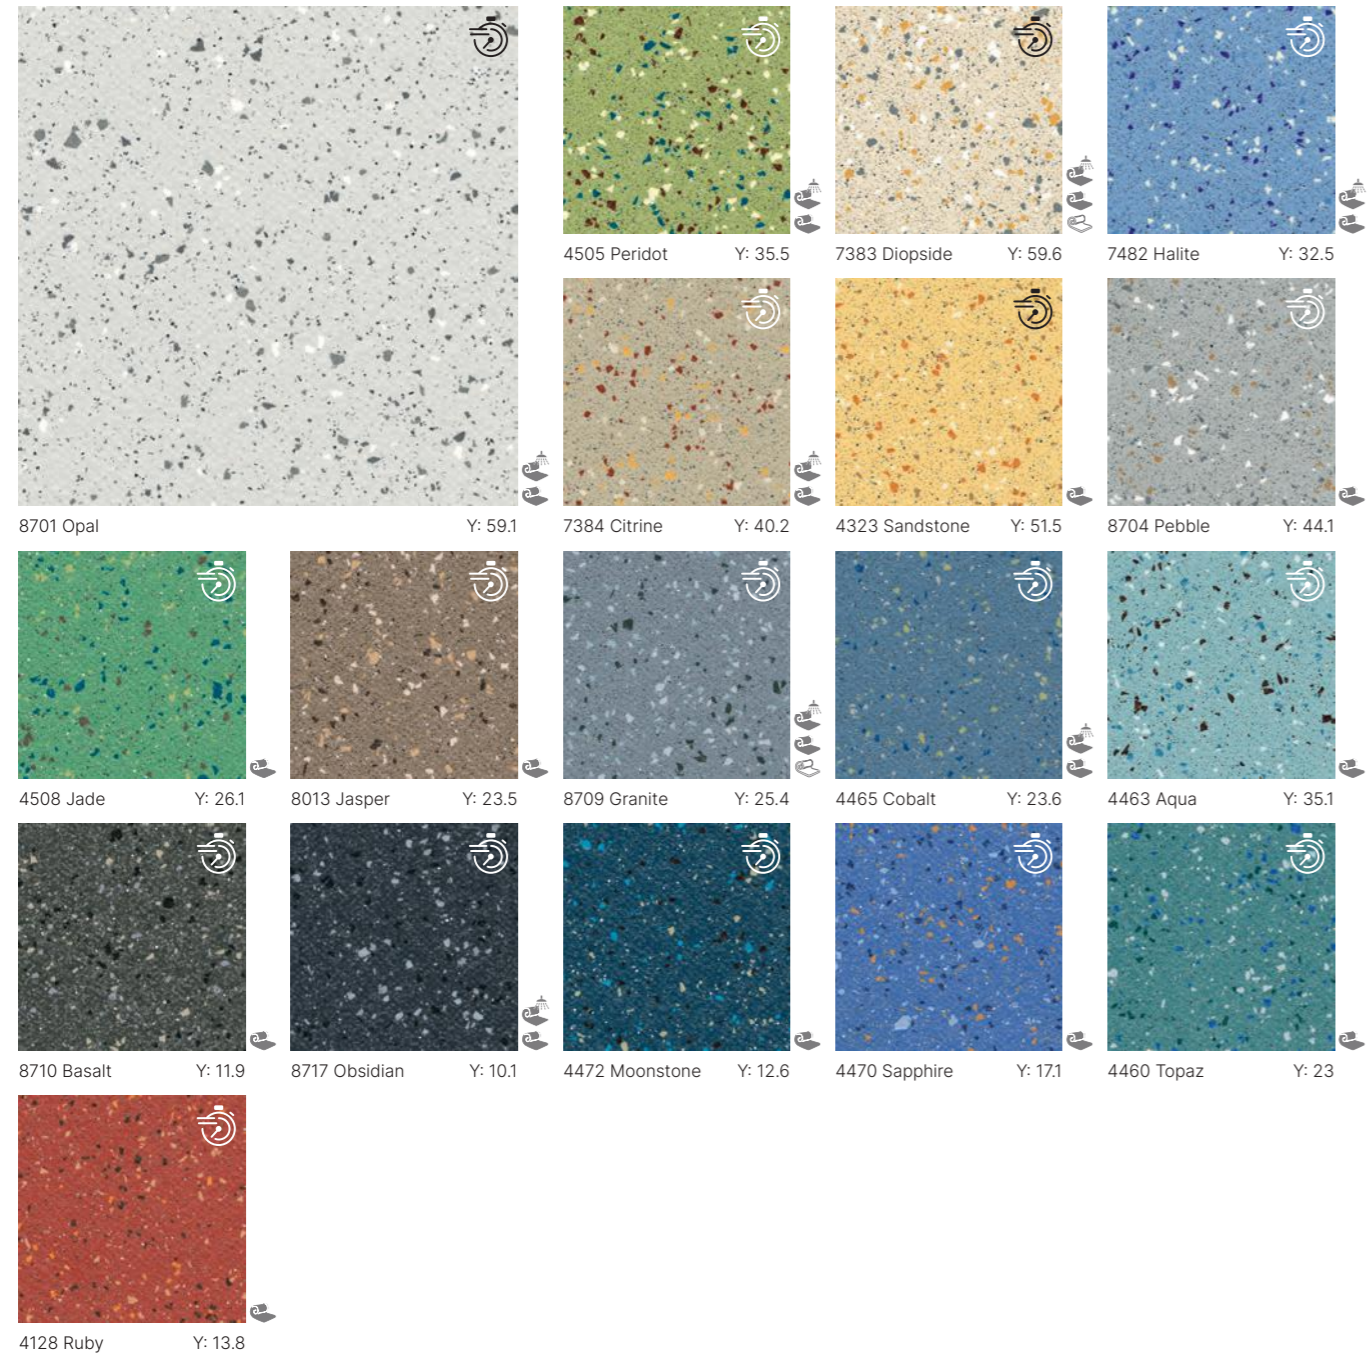

T Wear Group | **HSE 36+** Slip Resistant | **R10** Slip Resistant | **20** Roughness RTM / RZ | **Y** = Light Reflectance Value (LRV) | Weld Rods see page 195
Compact | **Comfort** Min order quantity 1600m² Lead time up to 6 weeks | **Compact** Colour reference also available in Tarasafe Ultra H₂O, see page 20 | **SparClean®** | **Stocked for quick delivery** see inside front cover


Tarasafe Standard / Plus / Super

Contract Safety Flooring

- > Easy to clean and maintain compacted nonporous surface
- > Enhanced colour, design and brightness of mineral crystal particles
- > PUR surface treatment for easier maintenance (Standard range only)




Standard

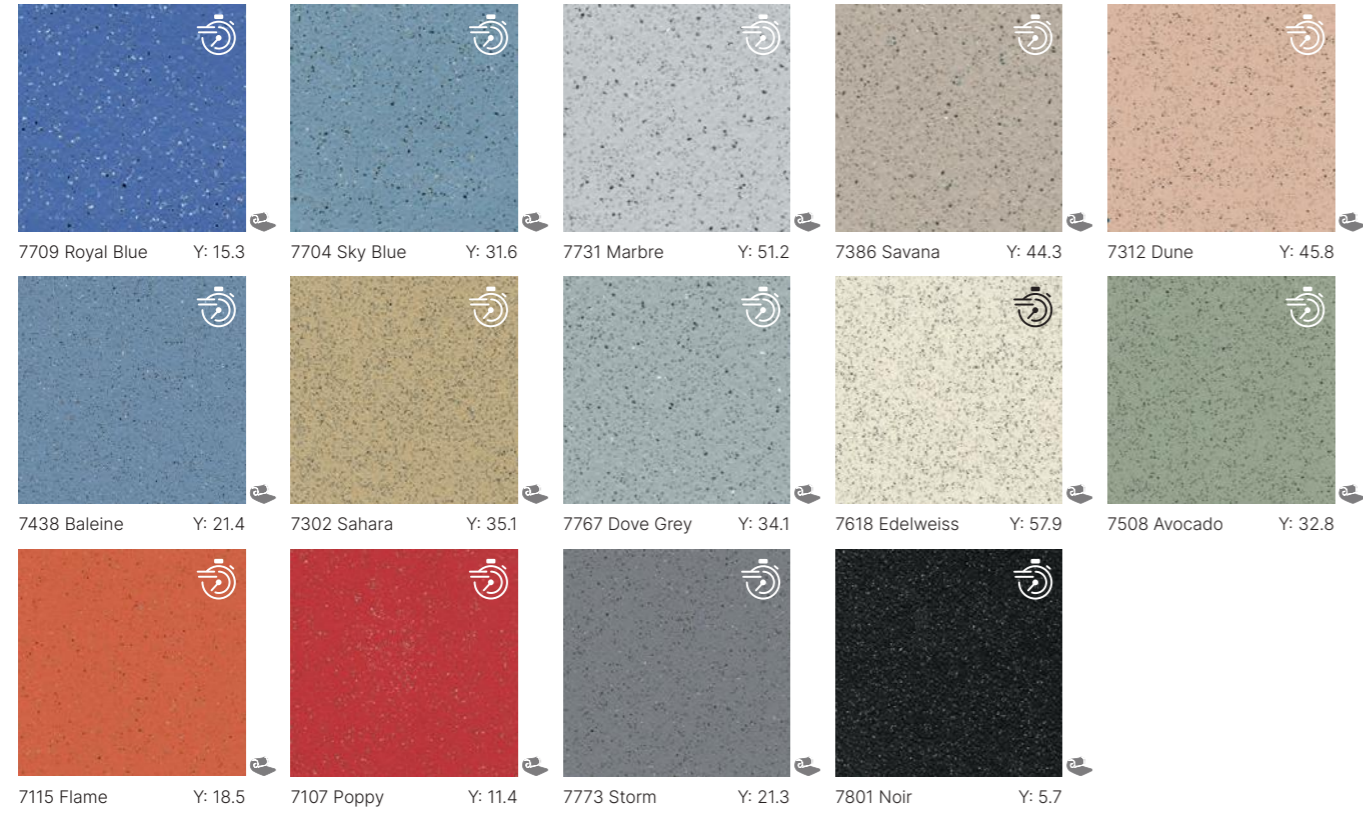

Plus



Super

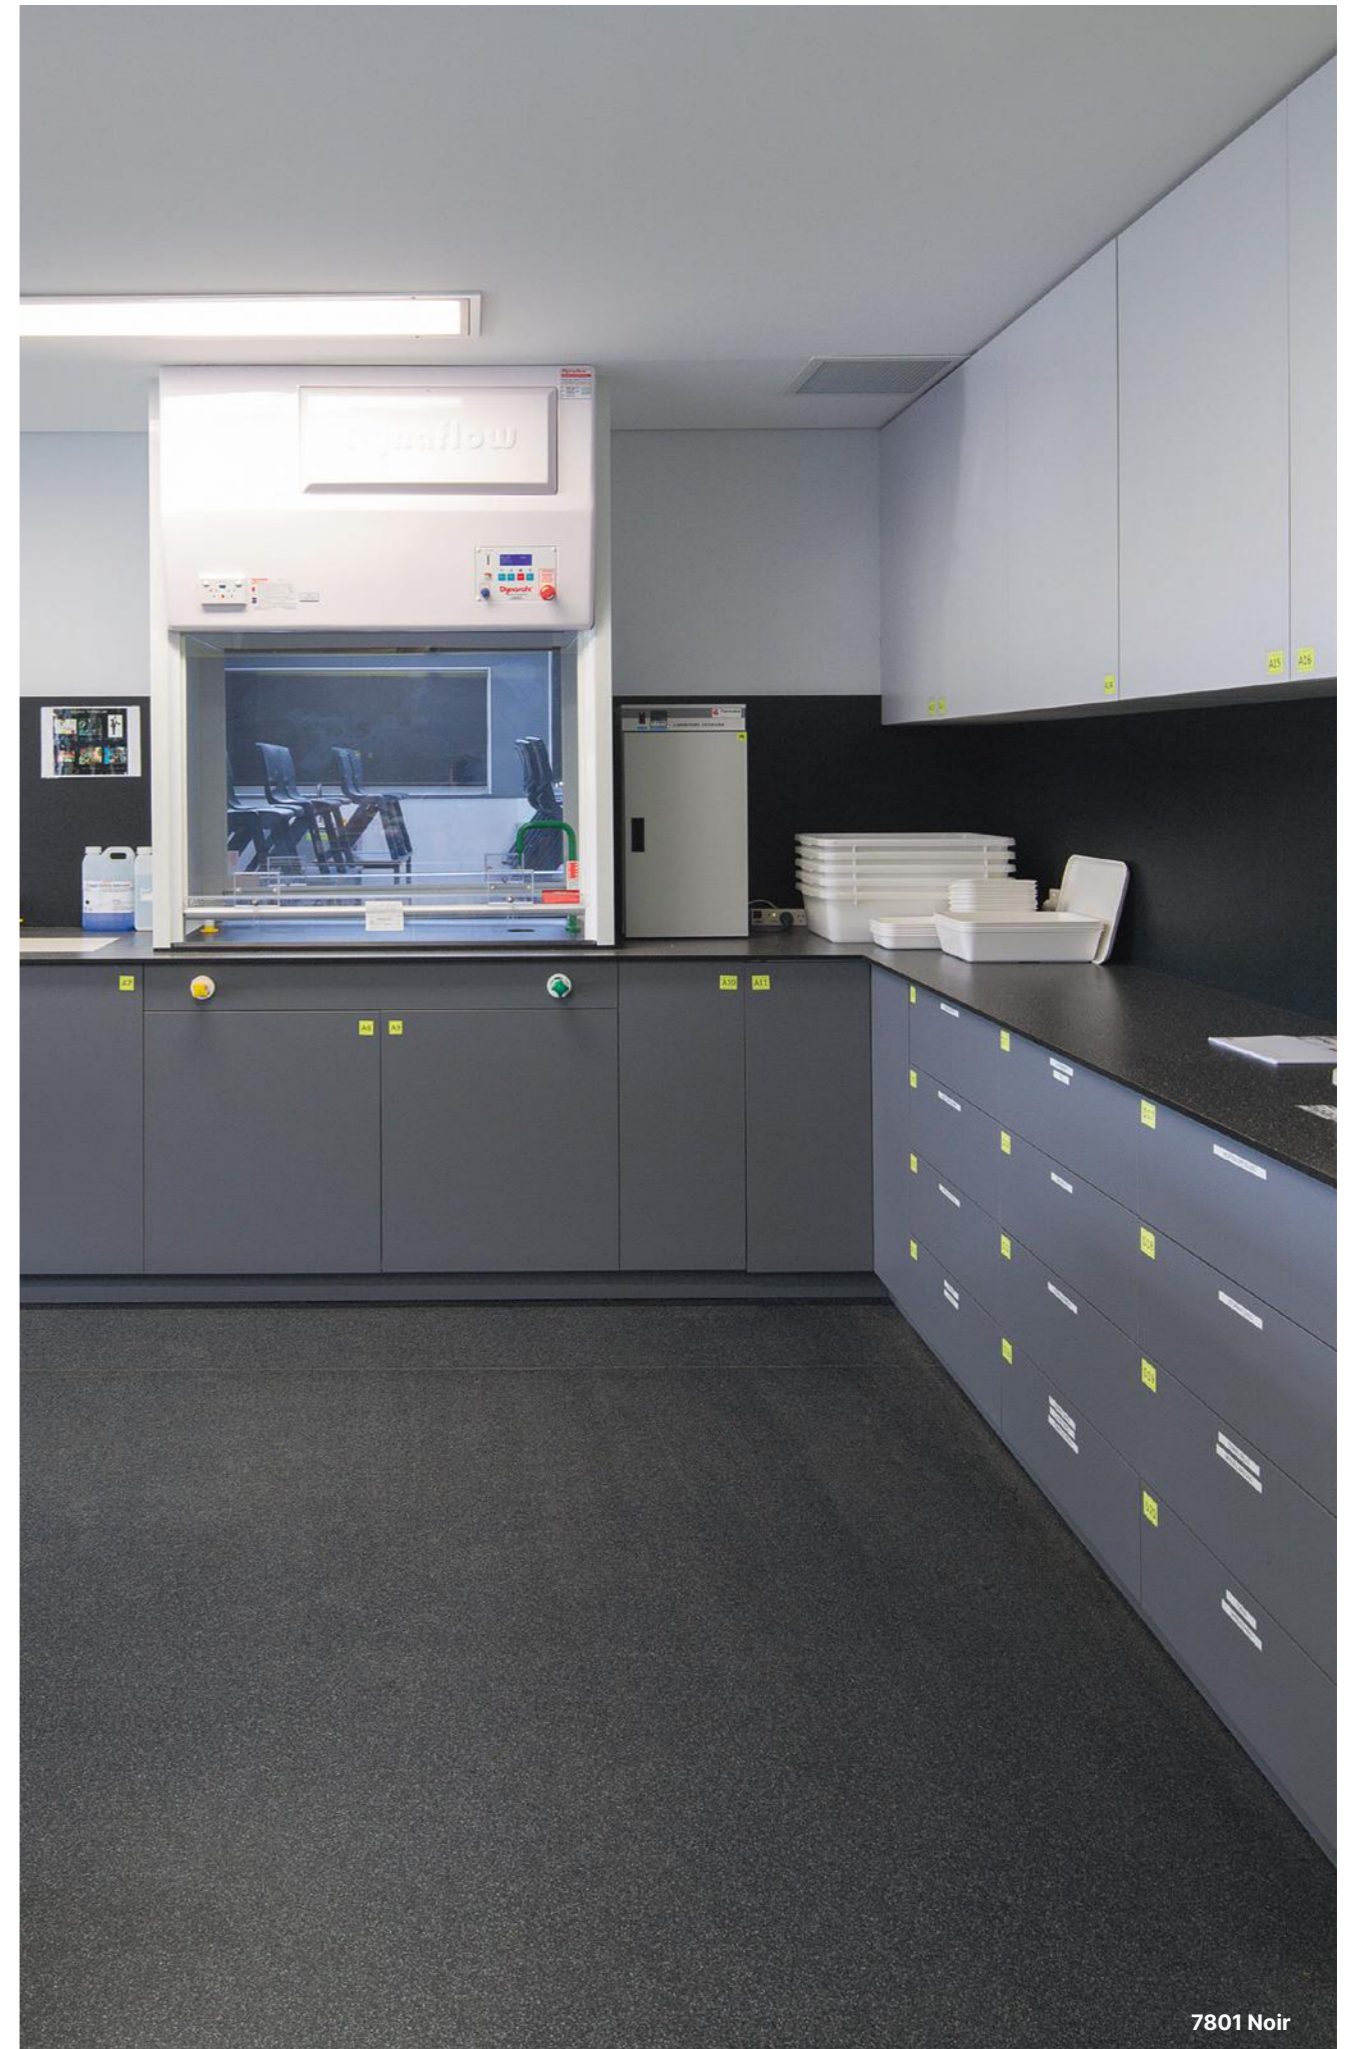

7801 Noir

T Wear Group	HSE 36+ Slip Resistant	R10 Slip Resistant Standard / Plus	R12 Slip Resistant Super	20 Roughness RTM / RZ
Compact	PUR Standard	Stocked for quick delivery see inside front cover	Y = Light Reflectance Value (LRV)	Weld Rods see page 195

Shower Solutions

Tarasafe Ultra H₂O is an enhanced slip resistant safety vinyl floor covering with a raised emboss designed for applications where there are continuous wet areas. It provides exceptional barefoot comfort and is an ideal solution for shower and changing rooms and any high level risk wet areas where heavy duty safety flooring is required.

It is suitable for use in all areas of heavy traffic where slip-resistance, durability and hygienic conditions are required.

Elegance SD shower range is a studded slip resistant vinyl floor covering, specifically designed for barefoot wet areas. Constructed using a high PVC content, with a glass fibre interlayer for additional stability. The flooring complies with BS EN 10581. It is available in sheet form and comes in standard roll sizes of 2m wide.


Elegance SD is suitable for use in schools, indoor leisure centres, hospitals and where an aseptic environment is required.

Mural Calypso is the only wall covering on the market with a coloured backing. It has excellent resistance to tearing, is hygienic with a washable surface and can be hot welded to the flooring thus reducing hospital borne infections. Available in a wide colour palette and range of nature-inspired designs.



Tarasafe Ultra H₂O is a safety flooring

7720 Iceberg



			Tarasafe Ultra H ₂ O	Elegance SD	Mural Calypso
Description					
Thickness	EN ISO 24346	mm	2.0 (on grainside)	2.4 (on grainside)	0.92
Wear layer thickness	EN ISO 24340	mm	1.0	2.40	0.10
Weight	EN ISO 23997	g/m ²	2400	3100	1610
Width of sheet	EN ISO 24341	cm	200	200	200
Length of sheet	EN ISO 24341	lm	20	20	30
Classification					
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10581	EN 15 102
European classification	EN ISO 10874	class	34 -43	34-43	-
Fire rating	EN 13501-1	class	Cfl-s1	Bfl-s1	B-s2,d0
Slip resistance wet: shod	DIN 51 130	class	R11	R9	-
Slip resistance wet: bare foot	DIN 51 097	class	C	B	-
Slip resistance: pendulum #55	BS 7976-2	PTV	> 36	-	-
Performances					
Wear resistance	EN 660.2	mm ³	≤ 4.0	≤ 4.0	-
Wear group	-	-	P	P	-
Type binder content	ISO 10581	type	-	I	-
Type binder content	ISO 10582	type	I	-	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40	-
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	-
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	-
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6	≥ 6
Chemical products resistance	EN 423	-	OK	OK	OK
TVOC after 28 days	ISO 16000-6	µg/m ³	< 100	< 10	-
CE Marking					
CE	EN 15102	-	-	-	OK
	EN 14041	-			-

Accessories: SITAR drains, floor/wall diminishing strip, cover former, weldable vinyl shower threshold, CA12 angle welding rods.

Installation: Installation should be carried out in accordance with local standards. Subfloor to be flat, smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise for 24 hours prior to installation at a room temperature between 18-24°C. All seams must be heat welded using matching Gerflor welding rod.










Maintenance: No emulsion dressings or polish required. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleanser.

Further installation and maintenance instructions are available from Gerflor.

Tarasafe Ultra H₂O

Shower Solutions - Safety Flooring






- > Slip resistant safety flooring for wet and dry, barefoot and shod applications
- > Easy to clean and maintain surface
- > Enhanced colour, design and brightness of mineral crystal particles







 7413 Ocean Blue Y: 31.8	 7746 Stone Y: 23.6	 7720 Iceberg
 7418 Marine Y: 22.8	 7732 Gravel Y: 9.7	
 7720 Iceberg Y: 60.6	 7513 Seagrass Y: 36.2	
 7325 Seashore Y: 63	 7314 Sand Y: 41.2	









Elegance SD

Shower Solutions - Safety Flooring

- > Available in 2m sheets
- > Hygienic, with bacteriostatic and fungistatic treatment
- > Specially embossed slip resistant surface

 0704 Raspberry Grey	 0322 Jicama Y: 67.8
	 0329 Hazelnut Y: 36.4
	 0705 Patisson Y: 64.4
	 0704 Raspberry Grey Y: 20.3

 P Wear Group	 HSE 36+ Slip Resistant	 R11 Slip Resistant	 20 Roughness RTM / RZ	 Shod Use	 Barefoot Use
 Compact	 100% Recyclable	 Stocked for quick delivery see inside front cover	 Y = Light Reflectance Value (LRV)	 Weld Rods see page 195	

 P Wear Group	 R9 Slip Resistant	 Shod Use	 Barefoot Use
 Compact	 100% Recyclable	 Y = Light Reflectance Value (LRV)	 Weld Rods see page 195

Mural Calypso

Shower Solutions - Wall Coverings


- > Wall covering in 2m width roll
- > B-s2,d0 fire classification
- > 100% recyclable and made from recycled materials



7005 Blossom Snow Pearl Y: 75.6



7005 Blossom Snow Pearl




7011 Lichen Y: 62.8




7007 Blossom Lichen Y: 63.8



7006 Blossom Haze Pearl Y: 65.0



7711 Ice Y: 70.7




7010 Haze Y: 62.3



7012 Breeze Y: 55.7




7715 Crystal Y: 60.6



7714 Frost Y: 43.5




7408 Skyline Y: 56.8




7309 Lotus Y: 75.5



7311 Linen Y: 56.5



7712 Shadow Y: 40.7




7611 Snow Y: 82.8



7104 Melon Y: 61




7201 Moonlight Y: 70.5

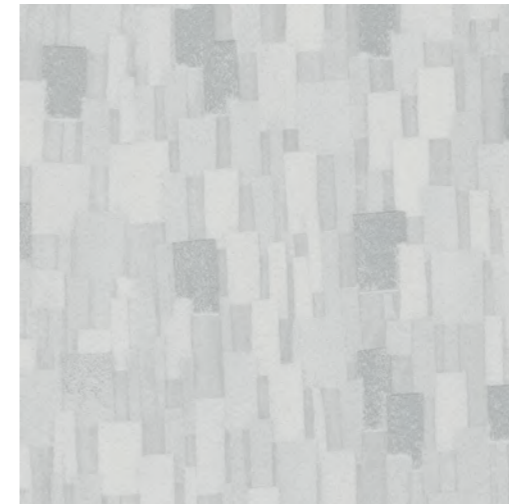


7004 Prism Haze Pearl Y: 60.2



7004 Prism Haze Pearl




7003 Prism Ice Y: 67.7




7728 Manhattan Stone Y: 39.5



7734 Manhattan Concrete Y: 21.8




7721 Manhattan Mist Y: 64.6



7008 Fossil Ice Y: 67.4



7009 Fossil Haze Y: 62.7



7000 Bamboo Snow Pearl Y: 80.2



7002 Bamboo Lotus Y: 73.3




7001 Bamboo Haze Pearl Y: 65.8



7736 Fabric Wool Y: 49.4



7740 Fabric Silk Y: 58.8



7414 Fabric Denim Y: 46.5



7744 Nordic Milk Y: 67.5



7753 Nordic Zen Y: 47.8

B-s2,d0 Fire Classification



Y = Light Reflectance Value (LRV)


Weld Rods see page 195

Vinyl Wall Coverings

Mural Ultra Design is a 2m width flexible printed wall covering vinyl sheet, which has a thickness of 1.5mm for an extended durability.

Fully resistant to impact (EN 259), Mural Ultra Design acts as a buffer against damage from beds, trolleys, indoor motorised vehicles and other transportation systems. It is therefore ideal for use as a cladding in large public buildings such as hospitals, care institutions, dental and veterinary surgeries, schools, clean rooms, stores and supermarkets, warehouse and storage areas.

It is made of a coloured backing which comprises up to 30% recycled products. It is 100% recyclable, and the components are 100% compliant with Reach.

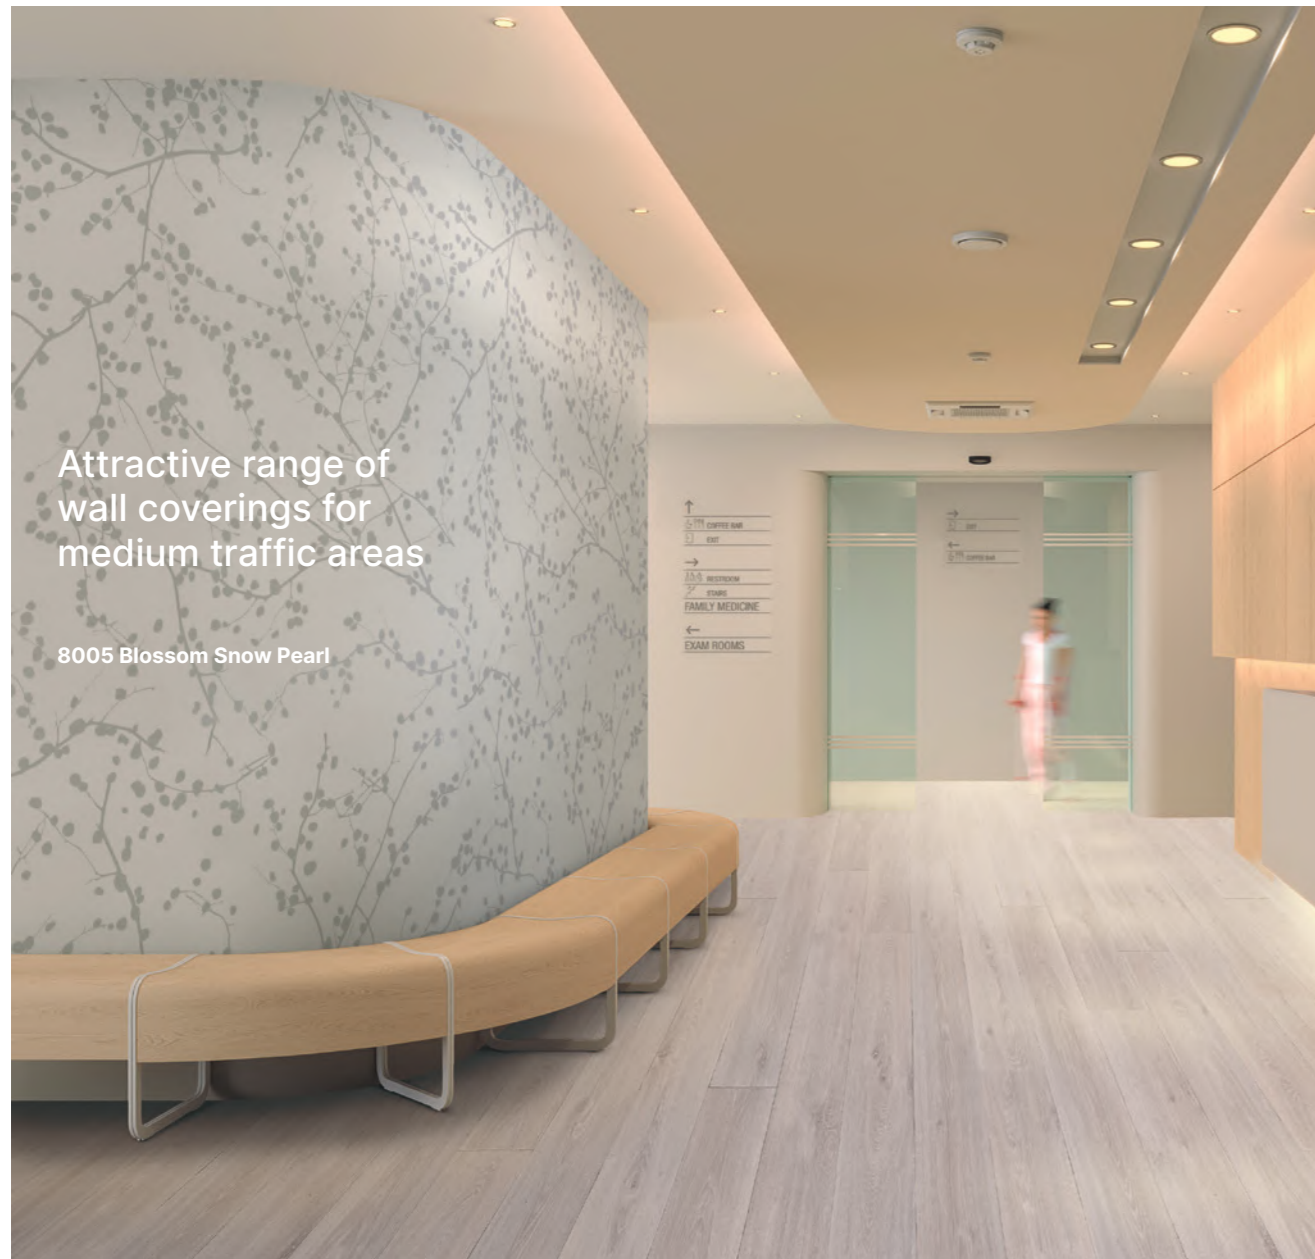

Attractive range of wall coverings for medium traffic areas

8005 Blossom Snow Pearl

			Mural Ultra Design
Description			
Thickness	-	mm	1.50
Wear layer thickness	-	mm	1.40
Weight	-	g/m ²	2450
Roll length	EN 233	cm	200
Roll width	EN 233	ml	21
Classification			
Norm / Product specification	-	-	EN 259-1
Fire resistance	EN 13501-1	class	B-s2,d0
Performances			
Curving after exposure to heat	ISO 23999-EN 434	mm	≤ 2
Colour fastness	EN 20 105-B02	degree	≥ 6
Surface treatment	-	-	Protectsol®
Resistance to chemicals ⁽¹⁾	EN ISO 26987	-	OK
Washability	EN 233	-	Washable and brushable
Particles emission	ISO 14644-1	class	Class 3
Anti-bacterial activity (E.coli- S.aureus- MRSA) ⁽²⁾	ISO 22196	-	99% inhibits growth
Impact resistance	EN 259-2	-	No burst or visible cracking
Scratching resistance	Sclerometre	-	No visible damage
Flexibility	EN ISO 24344	-	No damage, no cracking
Resistance of welded joints	EN 684	N/50mm	≥ 250
Environment			
Recyclability	-	-	100%
Recycled content	-	-	up to 30%
TVOC after 28 days	ISO 16000-6	µg/m ³	< 10
CE Marking			
CE	EN 15102		OK

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

(2) The implementation of an effective cleaning method is the best defence against infection.

Mural Ultra Design

Vinyl Wall Coverings

NEW RANGE


- > Wall covering in 2m width roll
- > Hygienic and easy to maintain thanks to the Protecsol surface treatment
- > B-s2,d0 fire classification
- > 100% recyclable and made from recycled materials



8005 Blossom Snow Pearl Y: 75.6



8005 Blossom Snow Pearl




8011 Lichen Y: 62.8




8007 Blossom Lichen Y: 63.8



8006 Blossom Haze Pearl Y: 65.0



8711 Ice Y: 70.7




8010 Haze Y: 62.3




8012 Breeze Y: 55.7




8715 Crystal Y: 60.6




8714 Frost Y: 43.5




8408 Skyline Y: 56.8




8309 Lotus Y: 75.5



8311 Linen Y: 56.5




8712 Shadow Y: 40.7



8611 Snow Y: 82.8



8104 Melon Y: 61




8201 Moonlight Y: 70.5




8744 Nordic Milk Y: 67.5




8744 Nordic Milk



8753 Nordic Zen Y: 47.8




8003 Prism Ice Y: 67.7




8004 Prism Haze Pearl Y: 60.2



8721 Manhattan Mist Y: 64.6



8008 Fossil Ice Y: 67.4



8009 Fossil Haze Y: 62.7



8000 Bamboo Snow Pearl Y: 80.2



8002 Bamboo Lotus Y: 73.3




8001 Bamboo Haze Pearl Y: 65.8



8736 Fabric Wool Y: 49.4




8740 Fabric Silk Y: 58.8



8414 Fabric Denim Y: 46.5



8728 Manhattan Stone Y: 39.5



8734 Manhattan Concrete Y: 21.8

B-s2,d0 Fire Classification



Protecsol®



100% Recyclable

Y = Light Reflectance Value (LRV)

Residential Slip Resistant Flooring

Griptex is a warm and comfortable slip resistant vinyl flooring with a unique GFT polyester textile backing that is specifically designed for housing & renovation it is easy to install textile backed flooring that can be loose laid up to 35m². It is slip resistant to HSE guidelines and has an excellent acoustic rating of 16dB. It is water resistant from above and below and has a hygienic and easy to clean **pureclean** surface that doesn't trap dirt and needs less water and detergent to clean.

Texline is tough vinyl flooring with a unique GFT patented textile backing system that gives higher warmth and comfort underfoot, and is safer, easier to clean, quieter and more hygienic than standard vinyl flooring. Texline is available in a range of stunning modern designs and colourways that can be used in any room in your home.



GFT is a textile backing system that has many benefits including higher warmth and comfort underfoot, sound deadening qualities and it can be laid over most existing floors by evening out small imperfections in the sub-floor, reducing the need for extensive and time consuming floor preparation - unroll it, it's laid!

pureclean Unique to Gerflor products, **pureclean** is a tough, easy to clean, slip resistant PU finish that is carefully selected to enhance the beauty and character of the floor.



Beautiful and practical collections that are specifically designed for renovation and new build projects

1179 Yoda Beige




Description	Griptex		Texline	
	GFT Backing		GFT Backing	
Thickness	EN ISO 24346	mm	2.9	2.9
Wear layer thickness	EN ISO 24340	mm	0.35	0.30
Weight	EN ISO 23997	g/m ²	2000	2000
Width of sheet	EN ISO 24341	cm	200 / 300 / 400	200 / 300 / 400
Length of sheet	EN ISO 24341	lm	+/- 25	+/- 25
Classification				
Norm / Product specification	-	-	EN ISO 26986	EN 653
European classification	EN ISO 10874	class	23-31	23-32
Fire rating	EN 13501-1	class	Cfl-s1	Cfl-s1
Slip resistance wet	DIN 51130	class	R10	R10
Slip resistance: pendulum test	BS 7976-2	PTV	≥ 36	-
Surface roughness	Rtm/Rz	µm	≥ 20	-
Performances				
Wear group	-	group	T	T
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40	≤ 0.40
Dimensional stability (average measured value)	-	%	0.05	0.05
Residual indentation (requirement)	EN ISO 24343-2	mm	≤ 0.35	≤ 0.35
Residual indentation (average measured value)	-	mm	0.20	0.20
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6
Impact sound insulation	EN ISO 717-2	dB	16	16
Surface treatment	-	-	pureclean GripX	pureclean
TVOC after 28 days	ISO 16000-6	µg/m ³	< 100	< 100
Domestic warranty	-	years	12	15
CE Marking				
CE	EN 14041			

Griptex

Slip Resistant Vinyl Flooring

- > Slip resistant to HSE standards
- > Hygienic and easy to clean surface
- > Tough and durable, 12 year domestic warranty
- > Patented GFT polyester backing

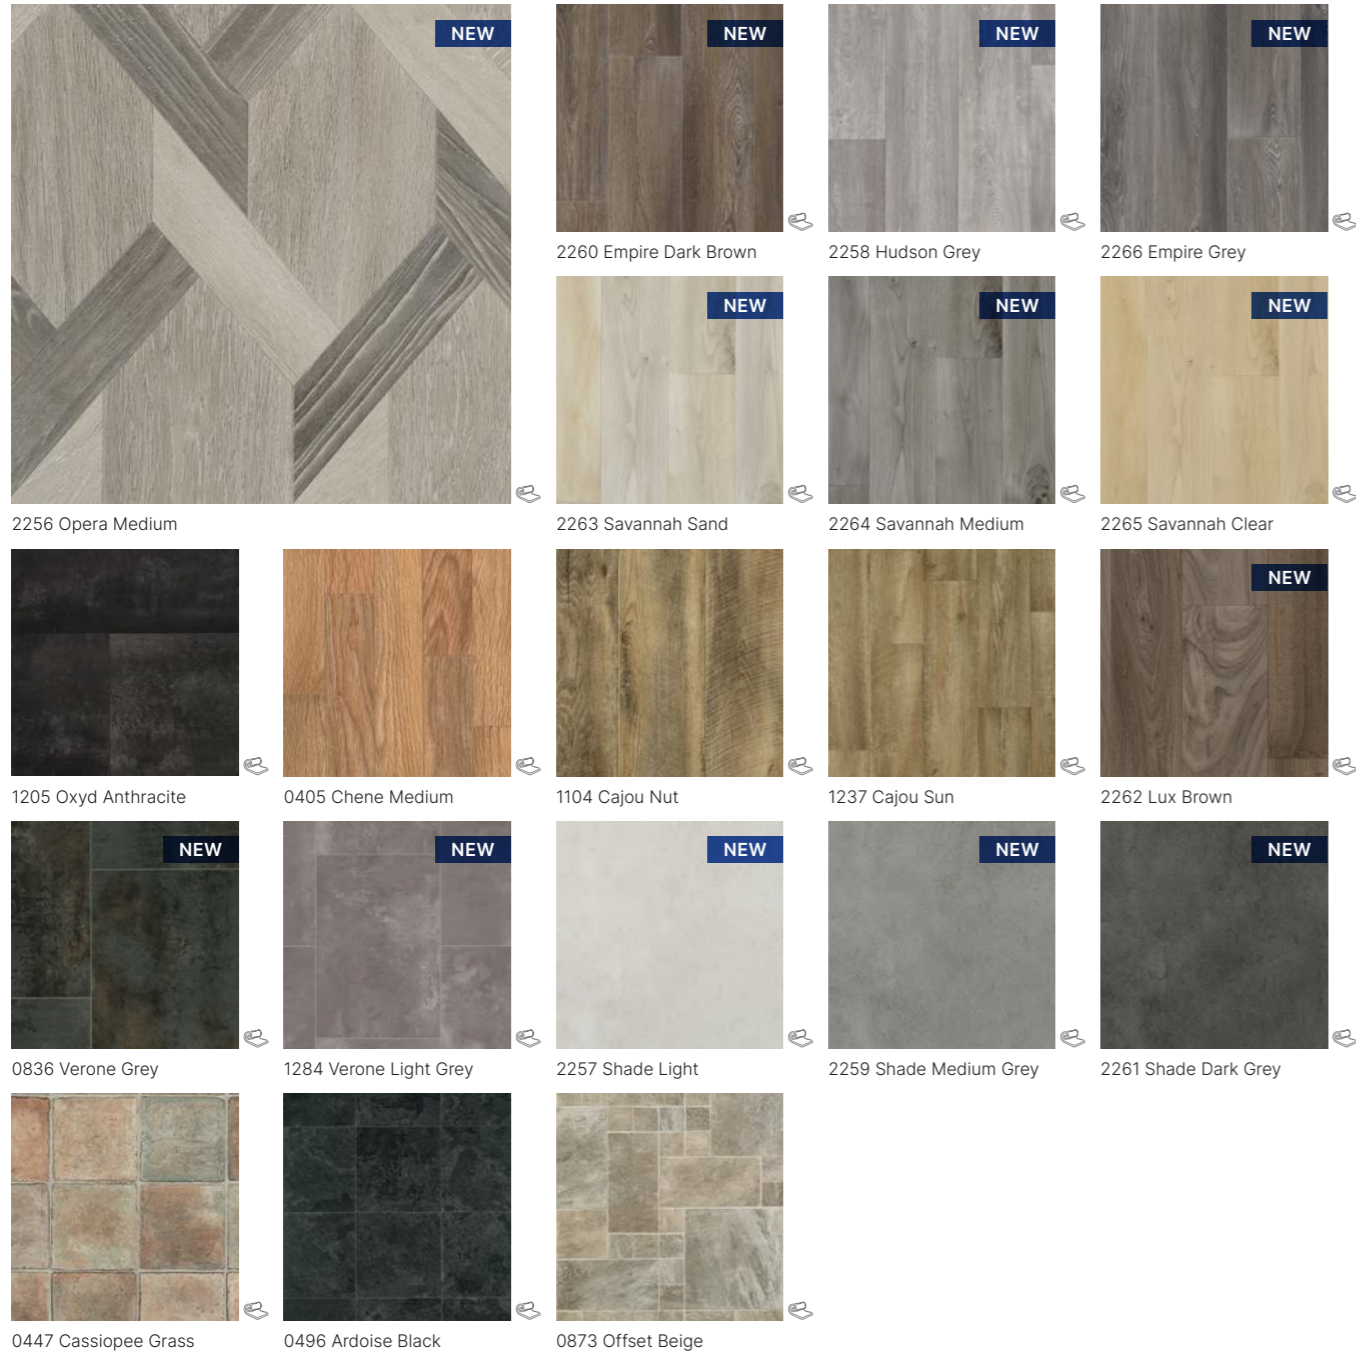

T Wear Group | HSE 36+ Slip Resistant | R10 Slip Resistant | 16_{dB} Quiet Underfoot




2256 Opera Medium

Texline

Slip Resistant Vinyl Flooring

- > Quick and easy to install
- > Easy to clean, slip resistant surface
- > Tough and durable, 15 year domestic warranty
- > Patented GFT polyester backing

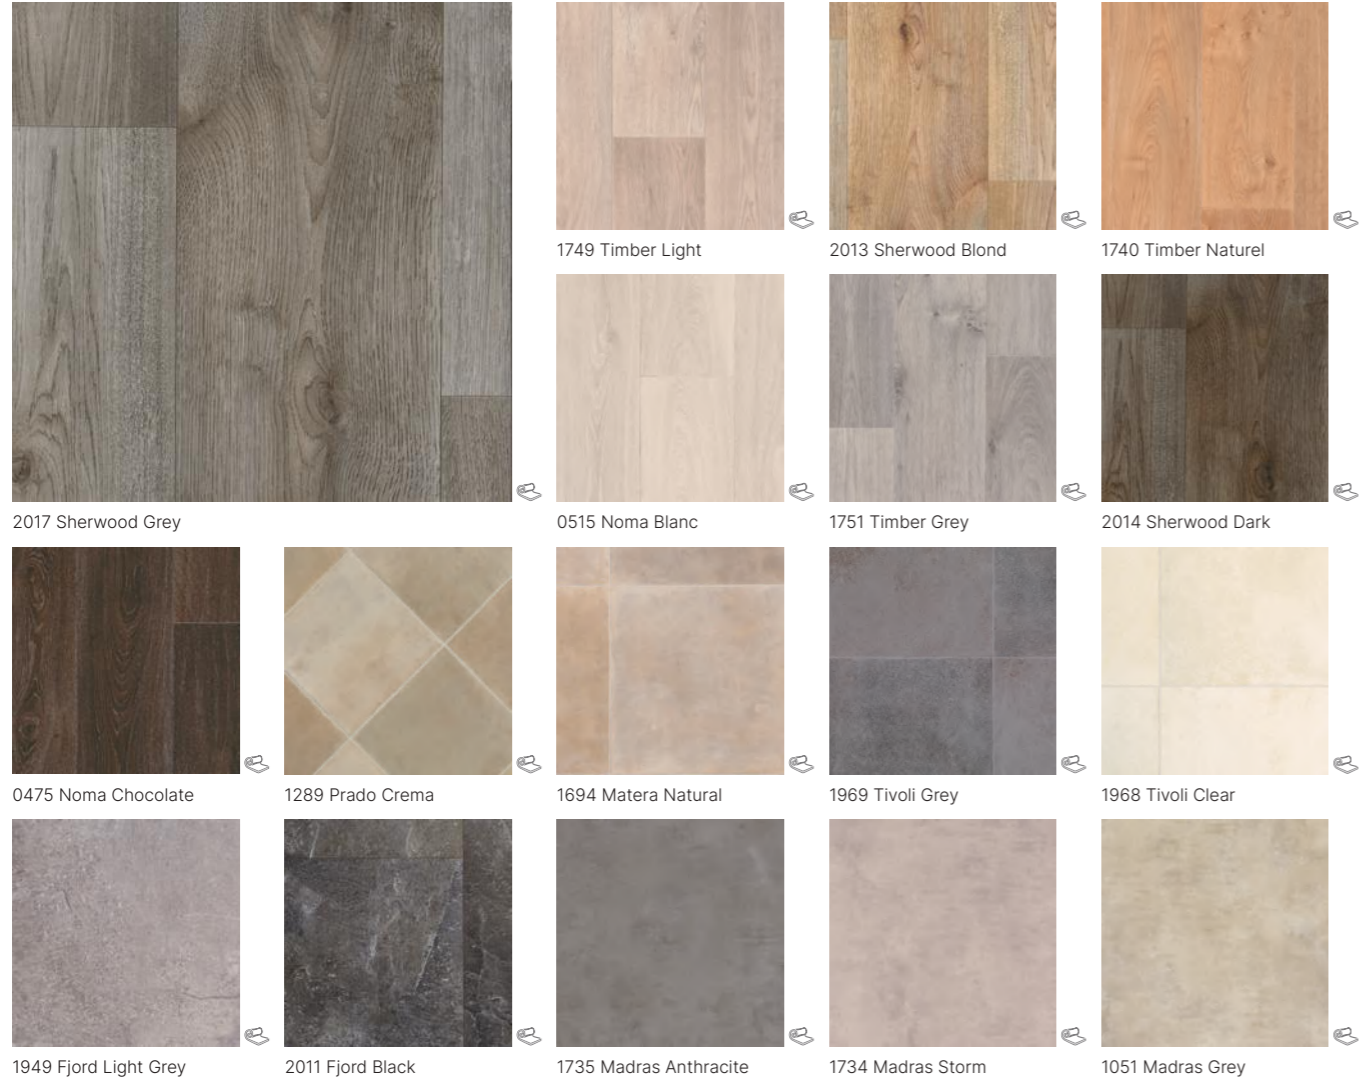

T Wear Group | R10 Slip Resistant | 16dB Quiet Underfoot



2017 Sherwood Grey

Homogeneous Flooring



The well-established **Mipolam** range already has an outstanding reputation for its performance in health and education buildings.

The ever popular Mipolam Symbioz™ range, incorporating 100% bio-based plasticisers, has recently been updated to offer a wider range of contemporary colours and designs for these applications.

The Mipolam range is a wide and flexible range of high performing homogeneous compacted floor coverings with all but the Classic products treated with Evercare™, an exclusive surface treatment (the latest pioneering technology on the market).

The vinyls are scuff resistant and need no waxing or polishing to maintain their appearance and colour brightness for years.

The combination of Evercare™ and anti-bacterial and fungicidal treatments also ensures that stains such as blood and iodine can be safely and hygienically removed with minimum water and detergent required. This reduces maintenance costs and lowers the environmental impact.

Suitable for use in most general public areas, schools, offices, indoor leisure centres, factory floors and storage areas, hospital wards and corridors, "clean rooms" and computer suites, where an aseptic environment is required.



The Mipolam range has a legacy going back more than 80 years

5312 White Pepper



Mipolam									
	Symbioz™	Planet	Accord	Affinity	Cosmo	Troplan	Classic		

Description			Symbioz™	Planet	Accord	Affinity	Cosmo	Troplan	Classic	
Thickness	EN ISO 24346	mm	2.0	2.0	2.0	2.0	2.0	2.0	1.5	2.0
Weight	EN ISO 23997	g/sqm	2595	2700	2790	2800	3000	3300	2520	3300
Width of sheet	EN ISO 24341	cm	200	200	200	200	200	200	200	200
Length of sheet	EN ISO 24341	lm	20	20	20	20	20	20	20	20
Tile size	EN ISO 24342	mm	-	608 × 608 ⁽¹⁾	608 × 608 ⁽¹⁾	608 × 608 ⁽¹⁾	608 × 608 ⁽¹⁾	608 × 608 ⁽¹⁾	-	300 × 300 ⁽¹⁾ 608 × 608
Number of tiles per pack	-	-	-	20	20	20	20	20	-	50 / 20
Classification										
Norm / Product specification	-	-	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581	EN ISO 10581
European classification	EN ISO 10874	class	34-43	34-43	34-43	34-43	34-43	34-43	23-31	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2	< 2	< 2	< 2	< 2
Performances										
Type binder content	EN ISO 10581	type	I	I	I	I	I	II	II	II
Dimensional stability	EN ISO 23999	%	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25
Impact sound insulation	EN ISO 717-2	dB	5	5	5	5	5	4	4	4
Residual indentation	-	mm	≈ 0.02	≈ 0.02	≈ 0.02	≈ 0.02	≈ 0.02	≈ 0.03	≈ 0.03	≈ 0.03
Slip resistance wet	DIN 51130	class	R9	R9	R9	R9	R9	R9	-	-
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 7	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	OK	OK	OK	OK	OK
Anti-bacterial activity (E.coli- S.aureus- MRSA) ⁽²⁾	ISO 22196	-	99% inhibits growth	99.7% - 2hrs 99.9% - 5hrs	99% inhibits growth	99% inhibits growth	99% inhibits growth	99% inhibits growth	OK	OK
Surface treatment	-	-	Evercare™	Evercare™	Evercare™	Evercare™	Evercare™	Evercare™	PUR	PUR
TVOC after 28 days	ISO 16000-6	µg/m³	<10	<10	<10	<10	<10	<10	<10	<10
CE Marking										
CE		EN 14041								


(1) Products available in tiles for a minimum quantity order of 500sqm.

(2) The implementation of an effective cleaning method is the best defence against infection.

Mipolam Symbioz™

Homogeneous Flooring

- > The highest durability with a product life expectancy of more than 20 years
- > Exclusive bio-based plasticiser, 100% recyclable and manufactured from an organic source
- > Revolutionary Evercare™ surface treatment providing chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs


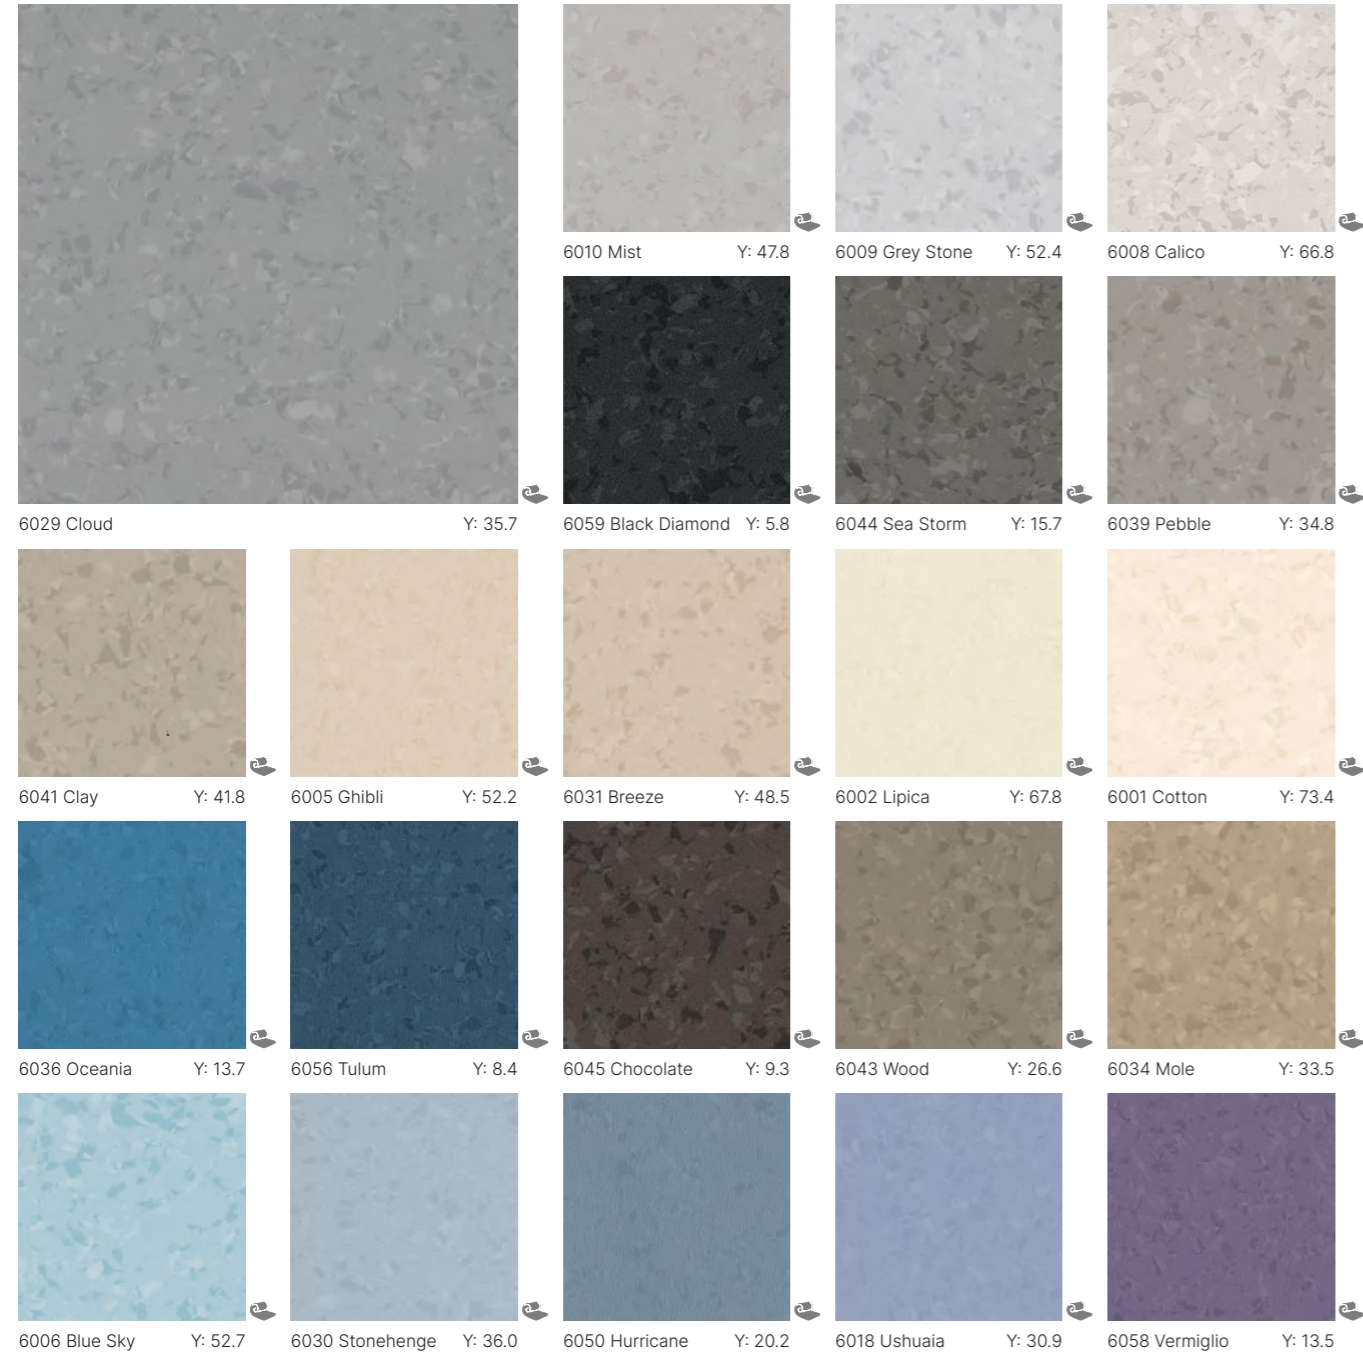


Mipolam Planet

Homogeneous Flooring

NEW RANGE

- > Suitable for heavy traffic areas
- > Available in tile and sheet format (A 500m² minimum order applies to tiles)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

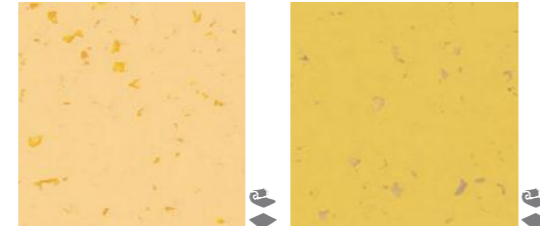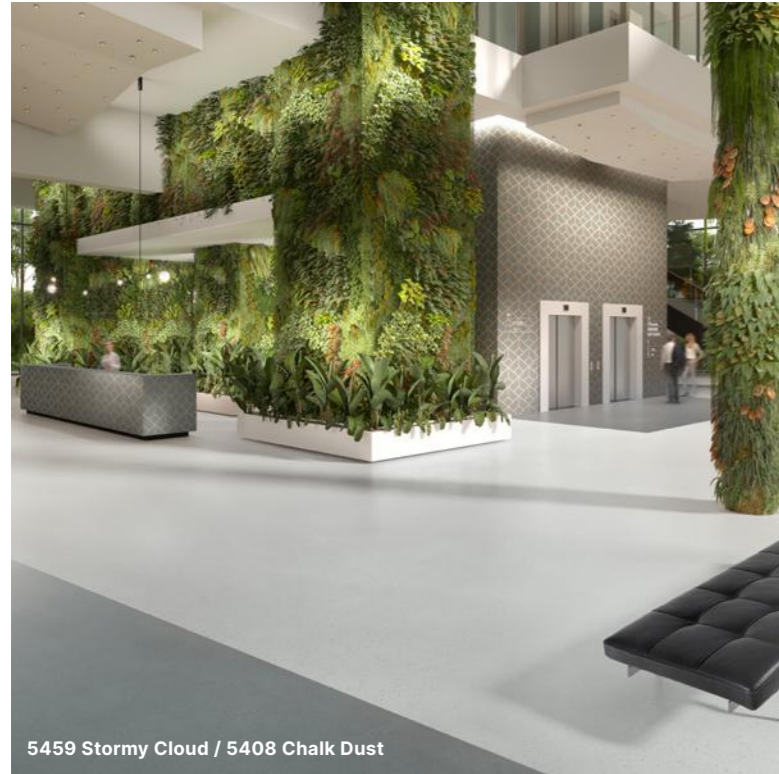


5432 Sun Stone Y: 57.7 5422 Sunflower Y: 46.5



5455 Lava Flow Y: 17.5 5475 Intense Ruby Y: 9.8




5403 Moon Dust Y: 72.2 5402 Ivory Dust Y: 68.2

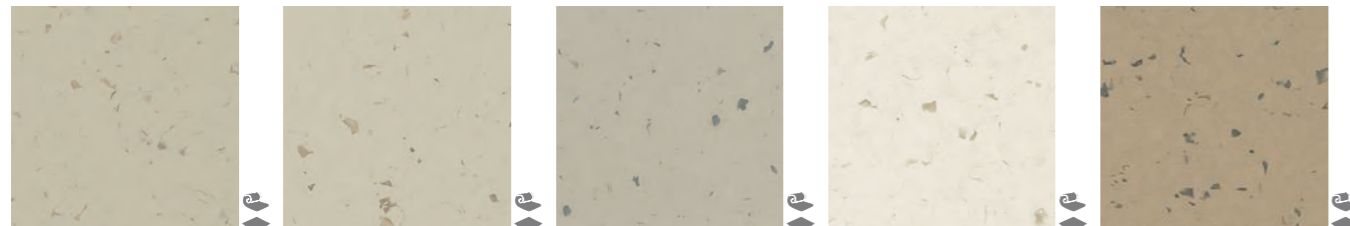

5424 Hawk Eye Y: 54 5404 Vanilla Sky Y: 53 5441 Clay Soil Y: 42.2 5412 Moon Stone Y: 52.3 5428 Shedded Ground Y: 35.4




5443 Wood Path Y: 25.2 5445 Tree Bark Y: 11.5 5444 Rocky Hill Y: 16.1 5438 Andalusite Y: 29.4 5418 Terra Nera Y: 38.2

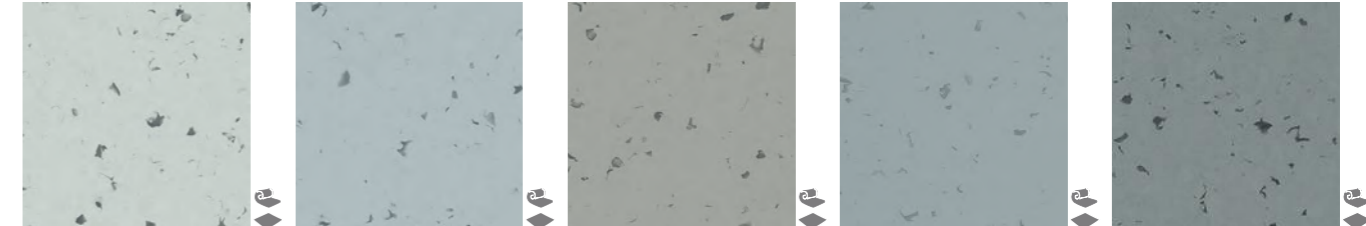


5410 Silex Y: 60.9 5413 Rain Fall Y: 49.5 5439 Moon Way Y: 37 5420 Stone Powder Y: 36.4 5430 Sideral Grey Y: 27.2




5408 Chalk Dust Y: 65.8 5409 Pebble Beach Y: 53.4 5411 Atlantic Grey Y: 49.1 5429 Fog Patch Y: 35.9 5450 Blended Ashes Y: 20.1

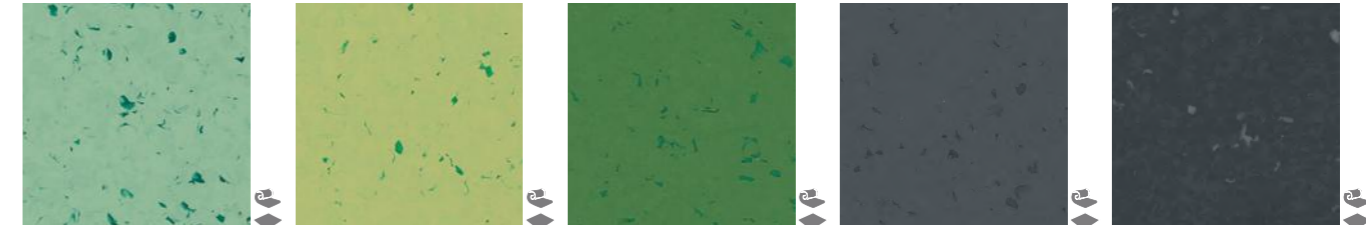

5417 Foggy Hill Y: 39.4 5427 Green Zest Y: 45.3 5447 Aventurine Y: 17.1 5459 Stormy Cloud Y: 10.4 5460 Lava Stone Y: 6.5

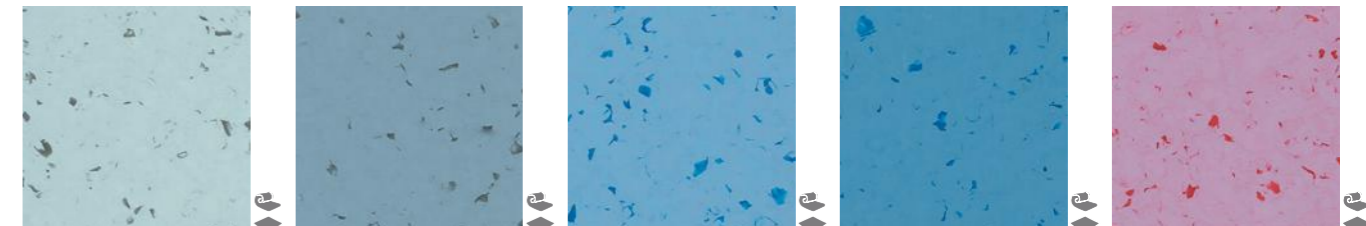

5406 Moqui Y: 52.1 5416 Acquamarina Y: 33.2 5426 Shadow Y: 35.5 5436 Tiger Eye Y: 24.5 5482 Sugar Drip Y: 34.8

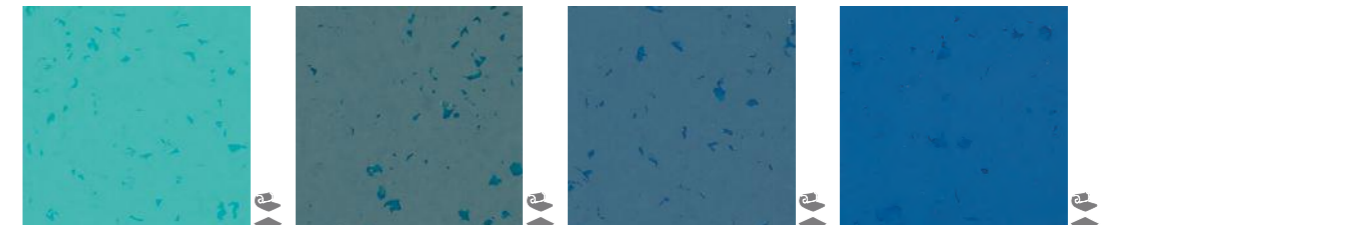

5437 Reef Water Y: 42 5466 Rocky Blue Y: 16.9 5446 Blue Nug Y: 13.5 5456 Intense Indigo Y: 12


Mipolam Accord

Homogeneous Flooring


- > Suitable for heavy traffic areas
- > Available in tile and sheet format (A 500m² minimum order applies to tiles)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs




0330 Kruger / 0321 Salt

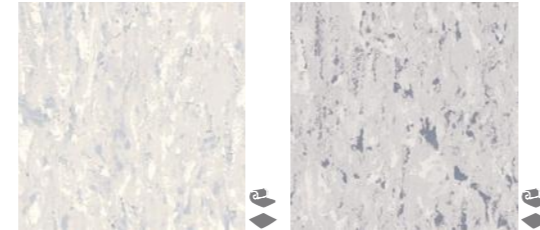


0321 Salt Y: 67.1 0312 Powell Y: 56.3

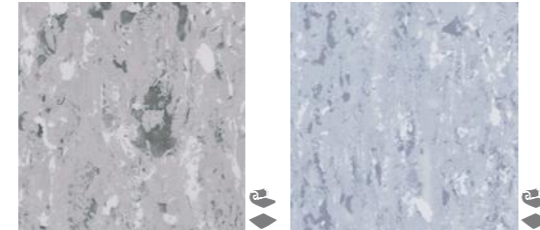

0319 Toba Y: 43 0310 Huron Y: 46.3

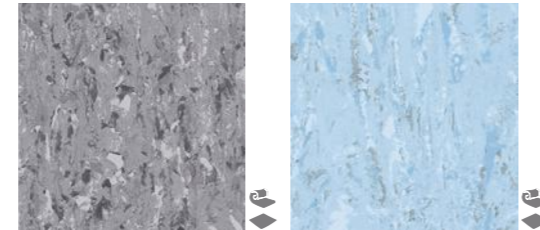

0330 Kruger Y: 26.8 0306 Inari Y: 53.6

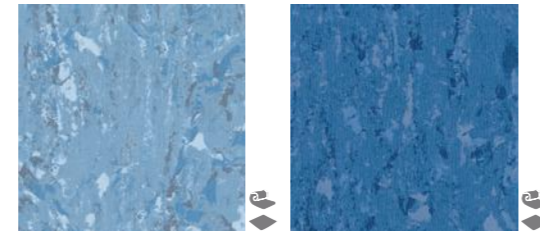


0316 Malaren Y: 31.9 0346 Roxen Y: 16.1




0332 Dore Y: 56.8 0301 Louise Y: 64.4 0324 Sand Y: 52.1 0443 Krumme Y: 25.1 0437 Flamingo Resort Y: 30.7



0425 Cork Y: 32.4 0303 Manitoba Y: 68.8 0441 Loch Ness Y: 42 0445 Otto Y: 9.4 0448 Bandak Y: 10.1

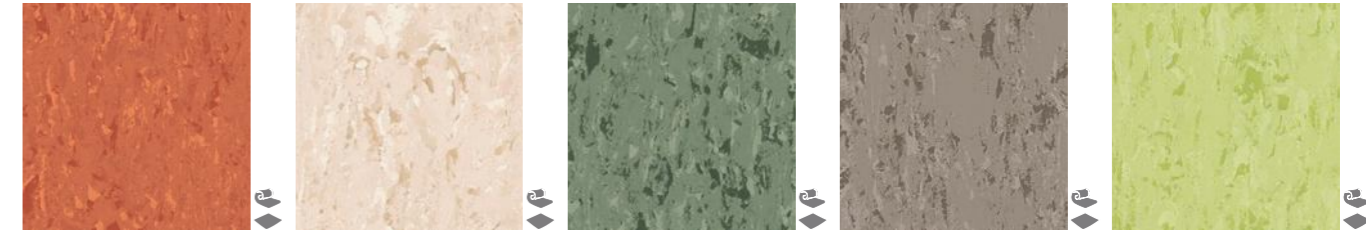

0315 Orange River Y: 19.2 0305 Light Sand Y: 64 0457 Como Y: 23.2 0463 Bourget Y: 24.9 0447 Grunsee Y: 48.8

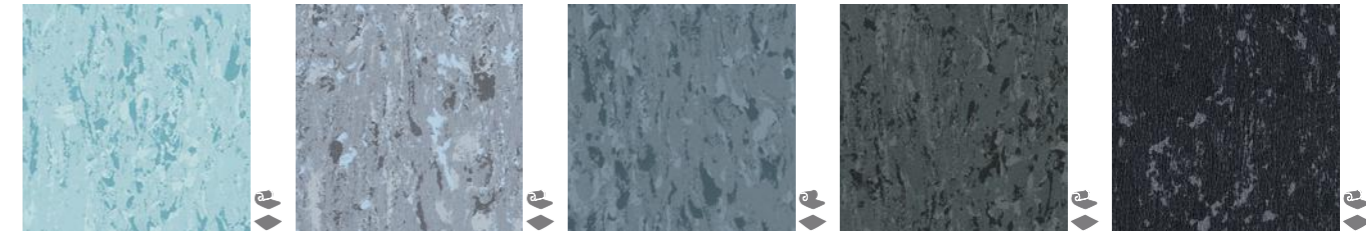

0417 Constance Y: 51.5 0320 Ontario Y: 33.1 0450 Thames Y: 19.9 0459 Mississippi Y: 10.8 0360 Balaton Y: 6.7



Tiles 608 x 608mm
Min order quantity 500m²

Evercare™



100%
Recyclable

Y = Light Reflectance
Value (LRV)



Weld Rods
see page 196



Mipolam Affinity

Homogeneous Flooring


- > Suitable for heavy traffic areas
- > Available in tile and sheet format (A 500m² minimum order applies to tiles)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

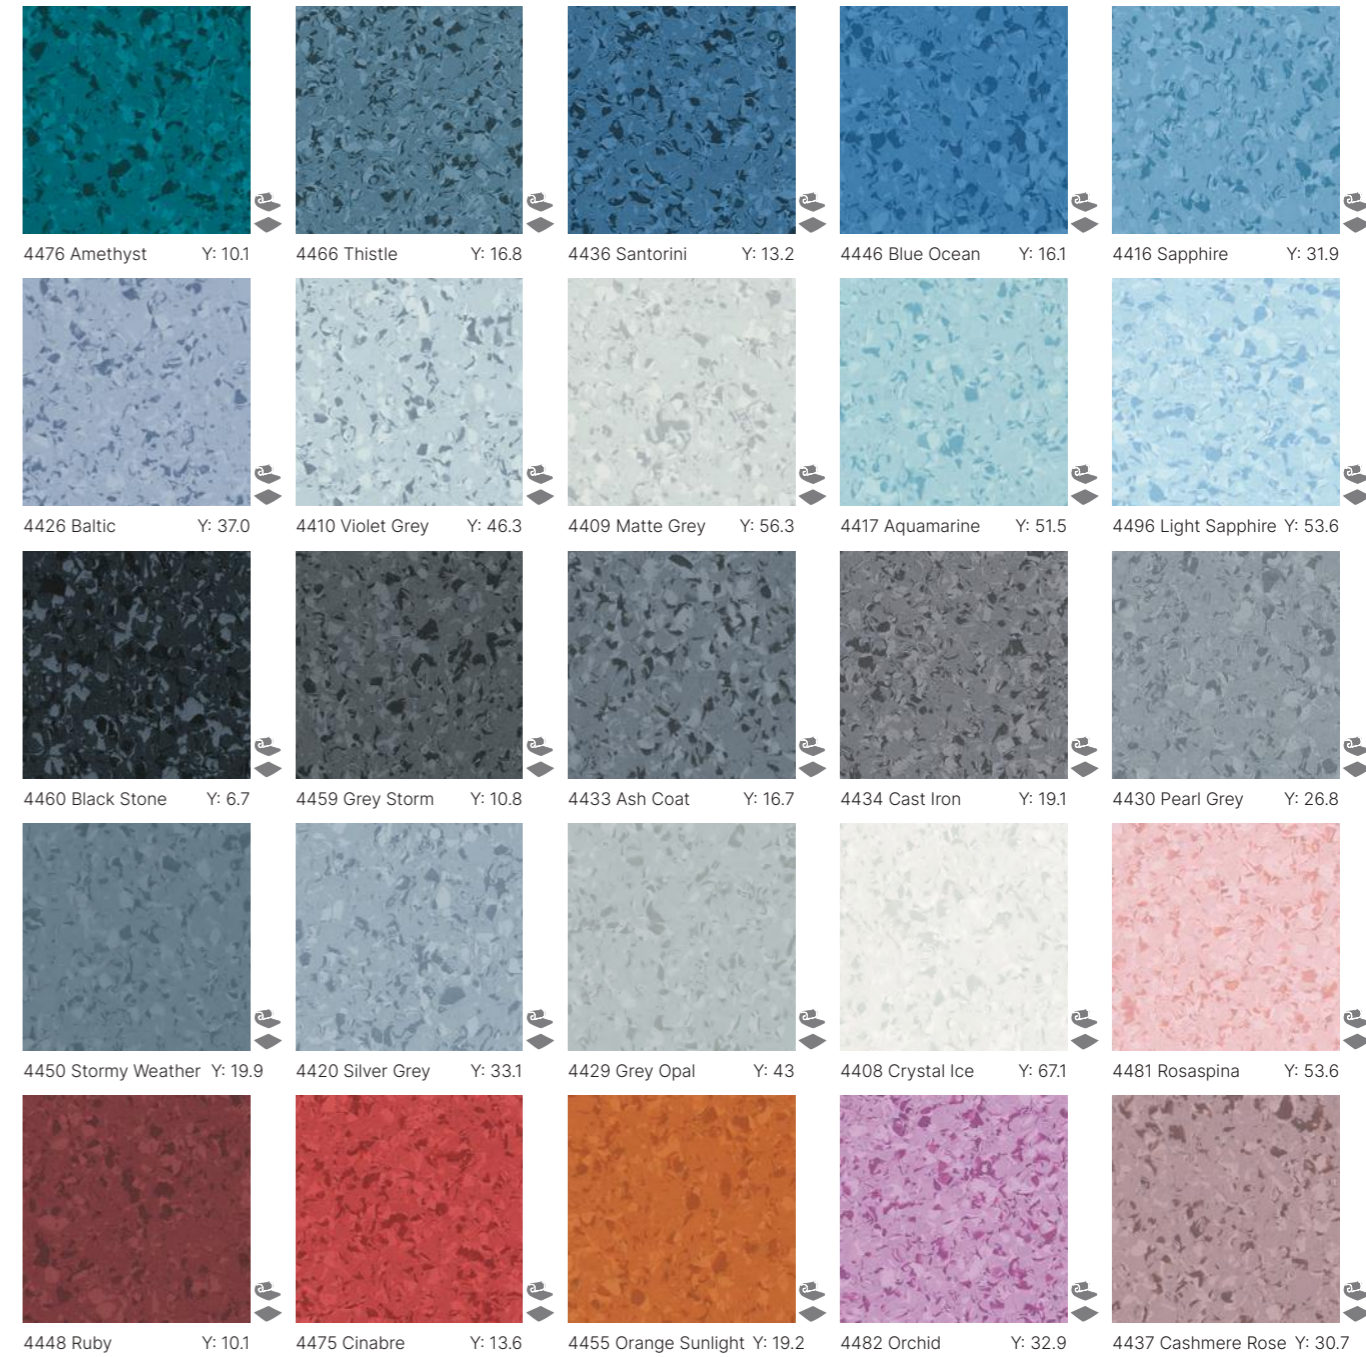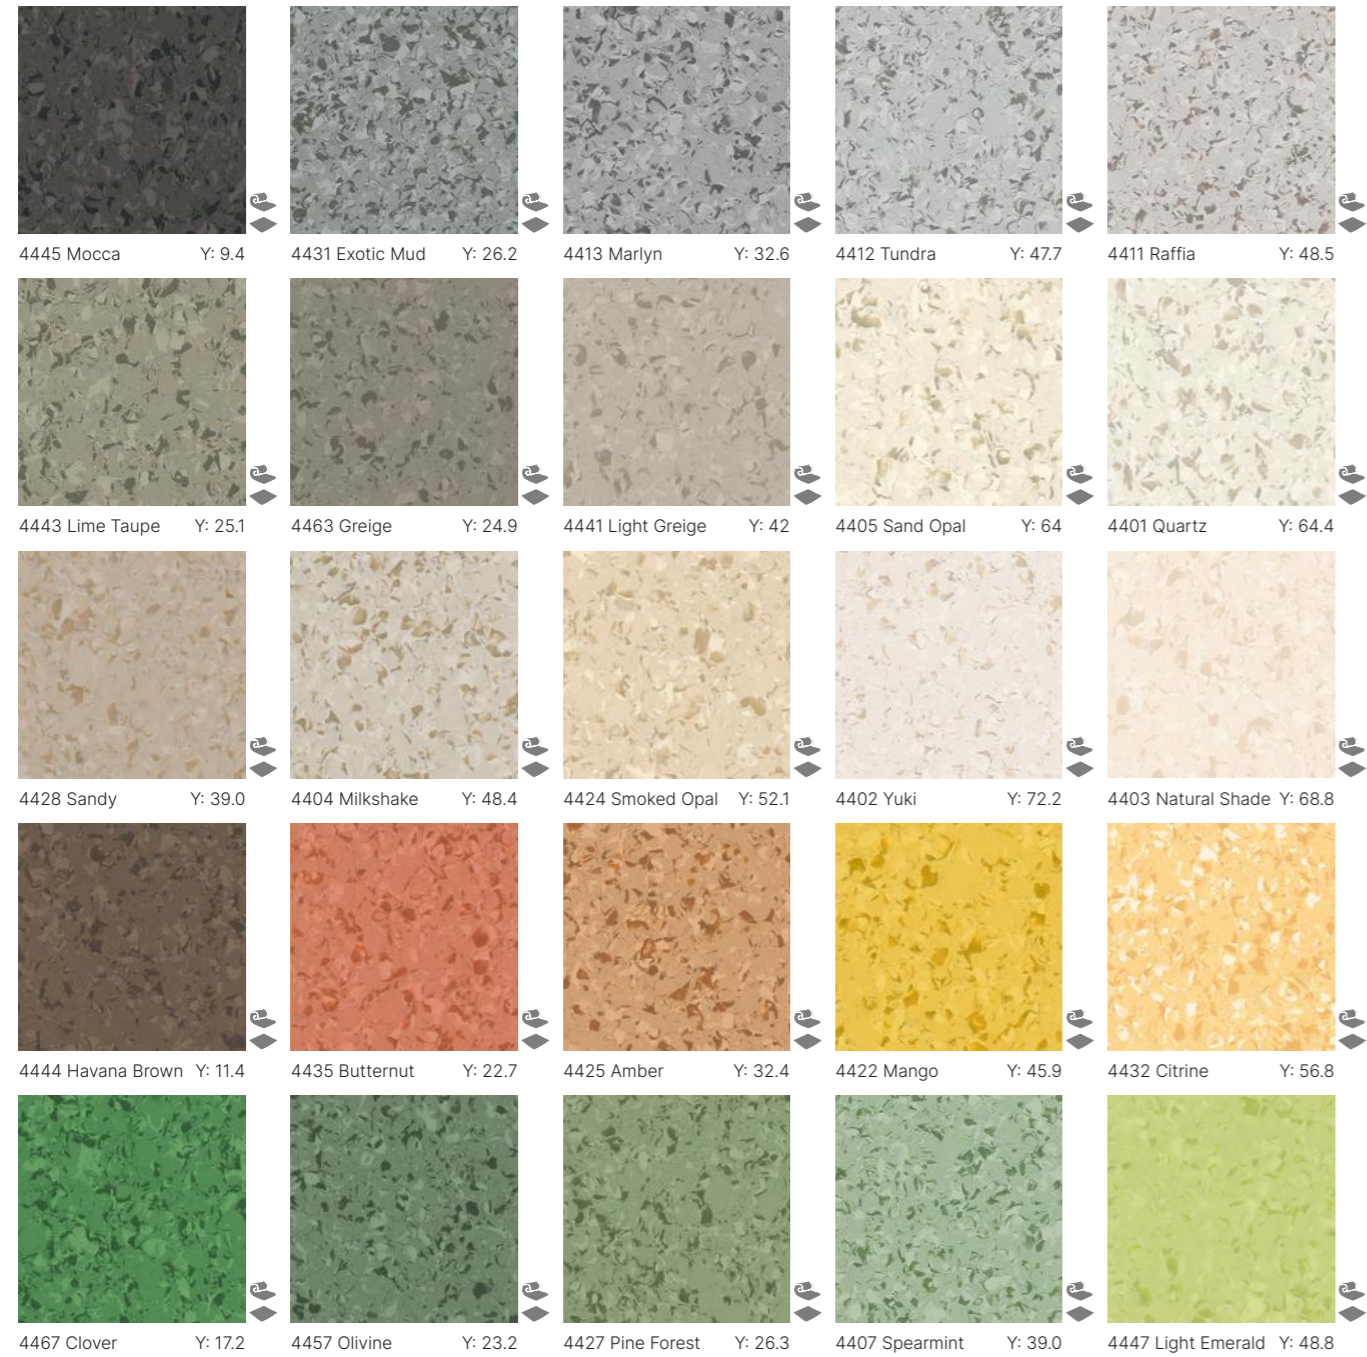

Mipolam Cosmo

Homogeneous Flooring


- > Suitable for normal to heavy traffic areas
- > Available in tile and sheet format. No minimum order quantity applies to tile colours marked with a tile icon. All other colours are available as a tile with a 500m² minimum order quantity
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

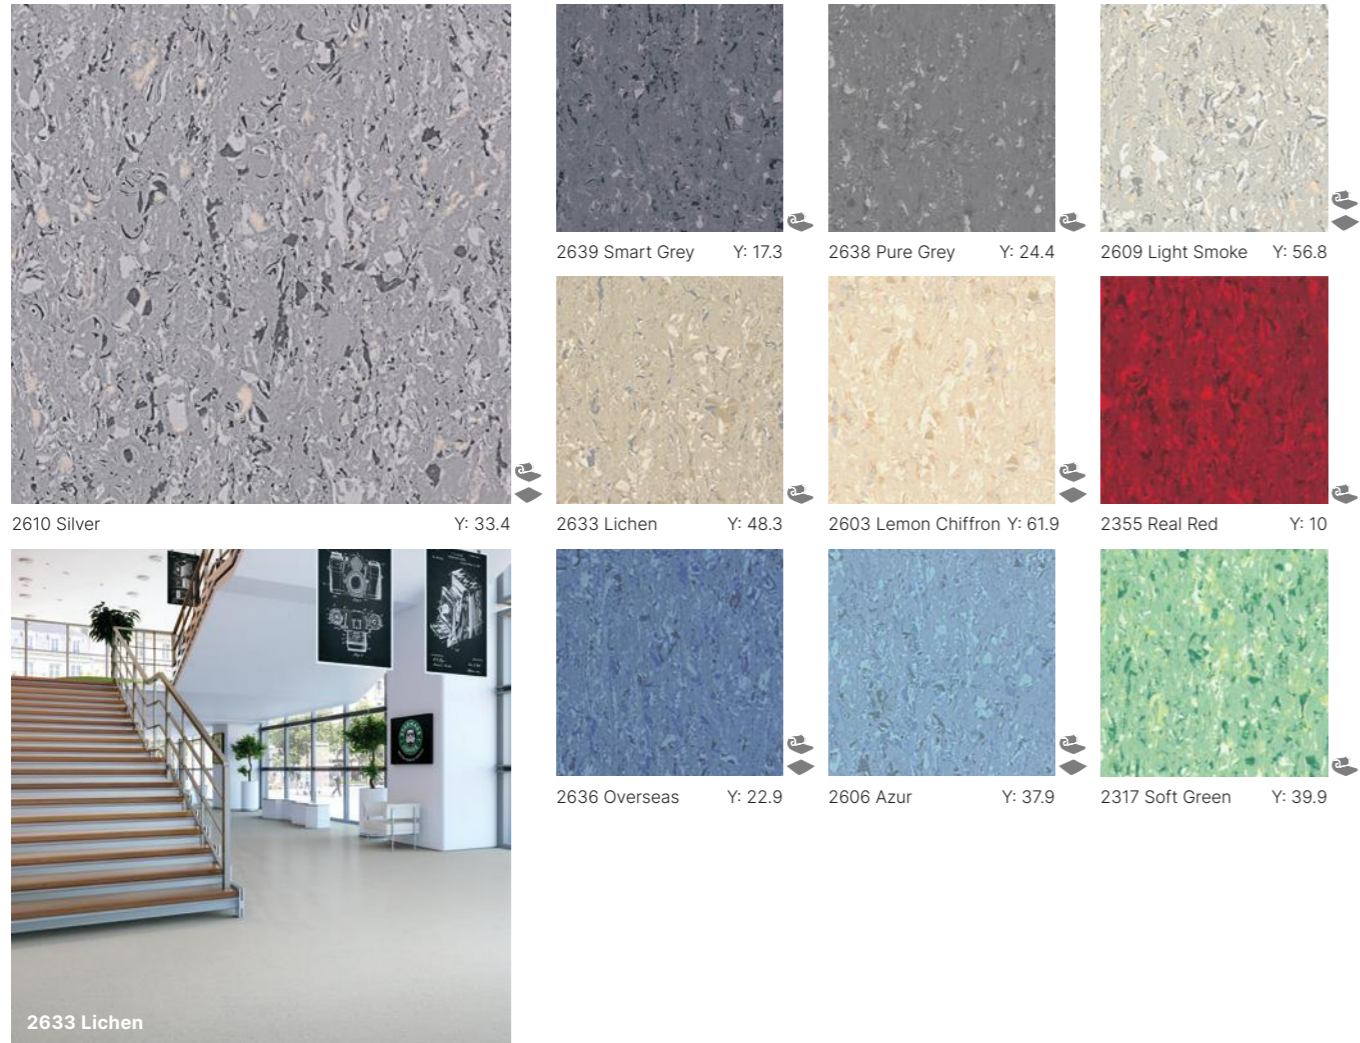

Mipolam Troplan

Homogeneous Flooring


- > Suitable for normal to heavy traffic areas
- > Available in tile and sheet format (a 500m² minimum order applies to tiles)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

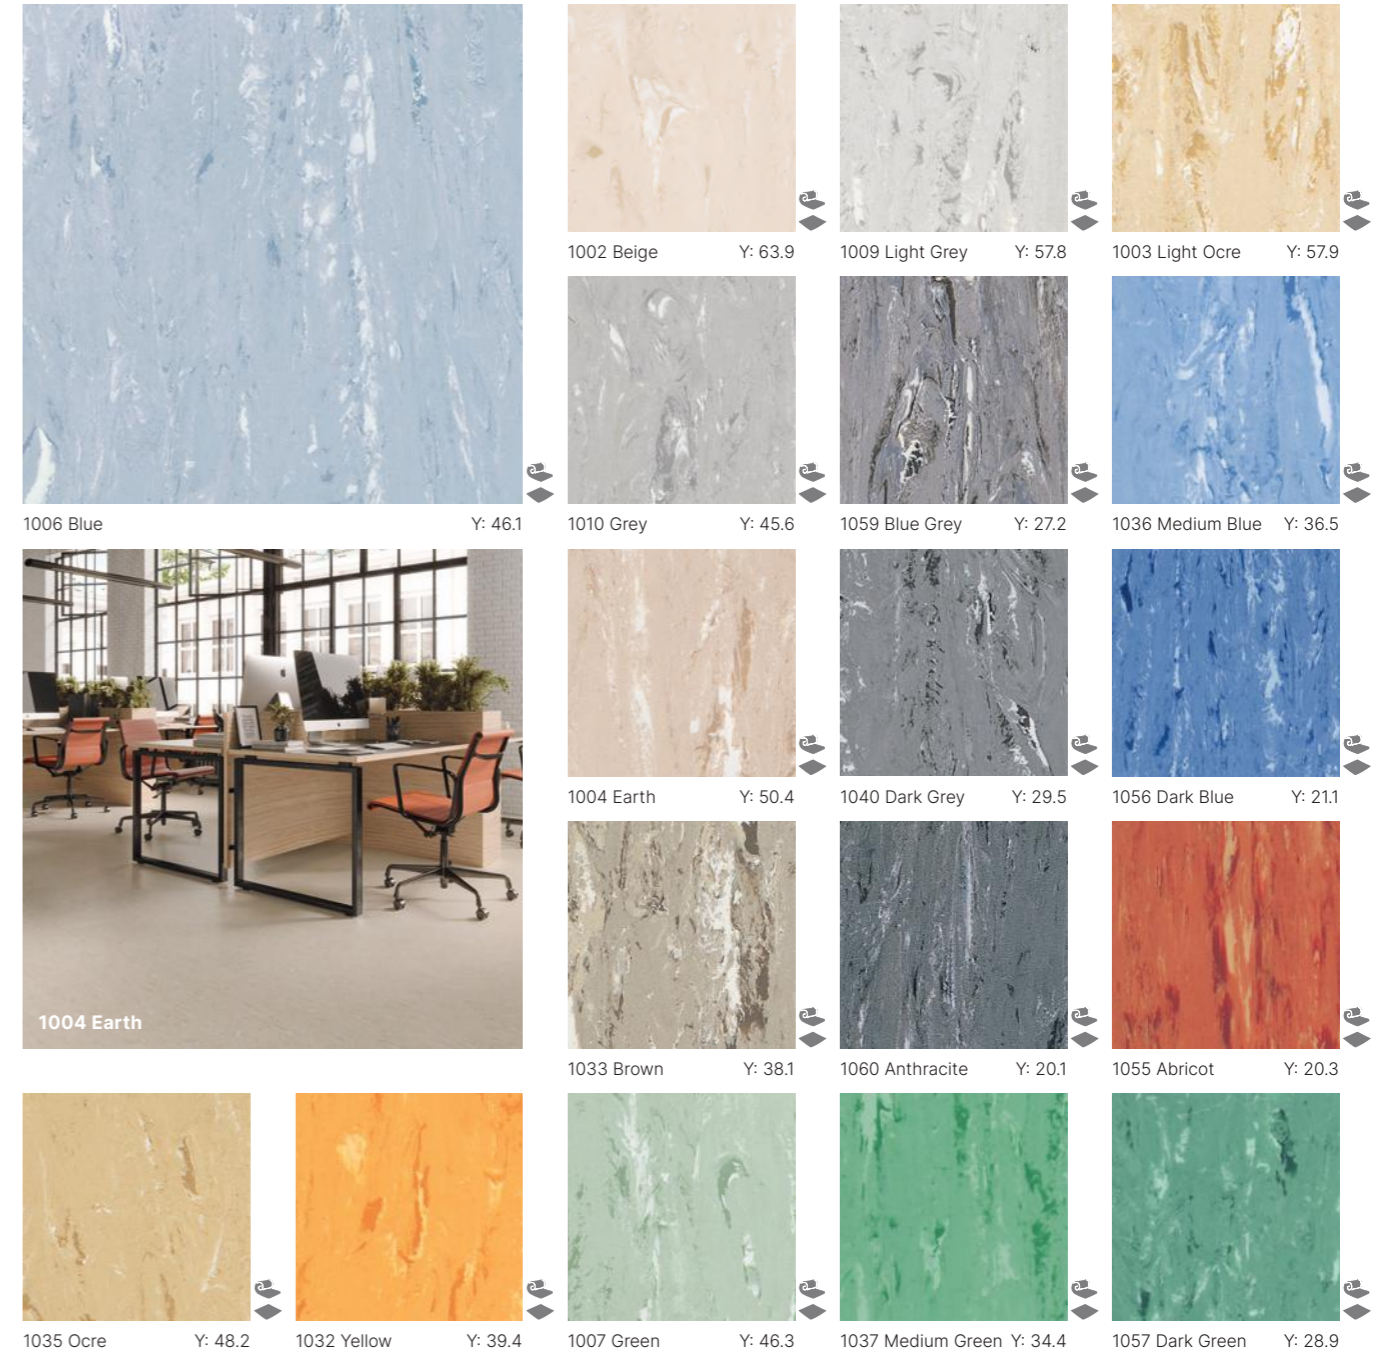

Mipolam Classic

Homogeneous Flooring

- > Suitable for normal to heavy traffic areas
- > Available in tile and sheet format (a 500m² minimum order applies to tiles)
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

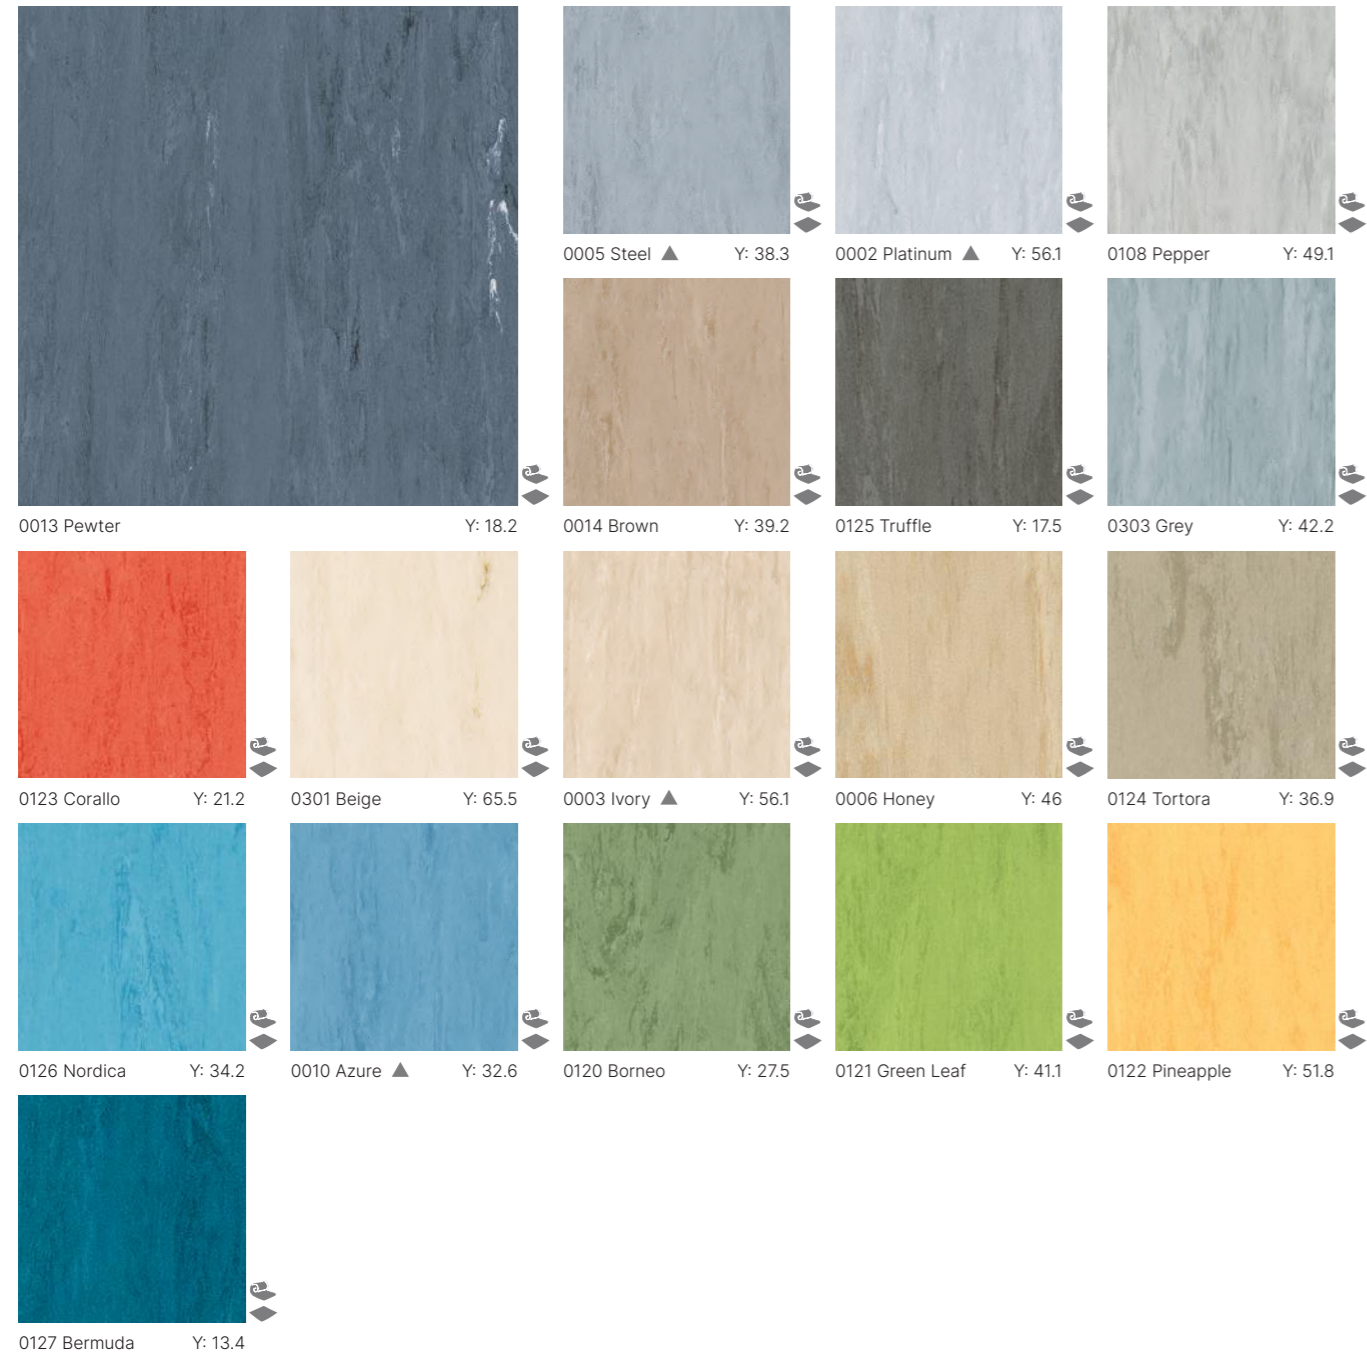

Compact Tiles 300 x 300mm 2.0mm only Min order quantity 500m²
 PUR
 100% Recyclable
 Y = Light Reflectance Value (LRV)
 Weld Rods see page 197
 ▲ Colour also available in 1.5mm thickness (2m x 20m sheet format only) Rolls 2.0mm - 2m x 20m



0002 Platinum / 0121 Green Leaf

Premium Multilayered Flooring

The **Premium** range is available in Comfort and Compact versions. Recently updated, the range offers 80 colour references across 6 designs for greater creative choice.


The ranges are suitable for high traffic areas so are extremely durable. They have a long lasting appearance through the incorporation of densely pressed colour chips in the wear layer.

Treated with Evercare™ surface treatment with extreme stain resistance and a matt finish, no polish is required for the entire lifetime of the product thus reducing maintenance costs.

Premium Comfort has excellent acoustic and shock absorption properties with high acoustic performance (16dB Metallica range, 17dB all other ranges) and safe underfoot cushioning thanks to its very high density foam backing.

Premium Compact provides excellent resistance to static and dynamic loads. With quick indentation recovery (0.02mm) and superb dimensional stability – minimal rucking when heavy objects are wheeled across the surface.

Ideal solutions for schools, hospitals, retail outlets, offices, public areas as well as many other applications in various markets.

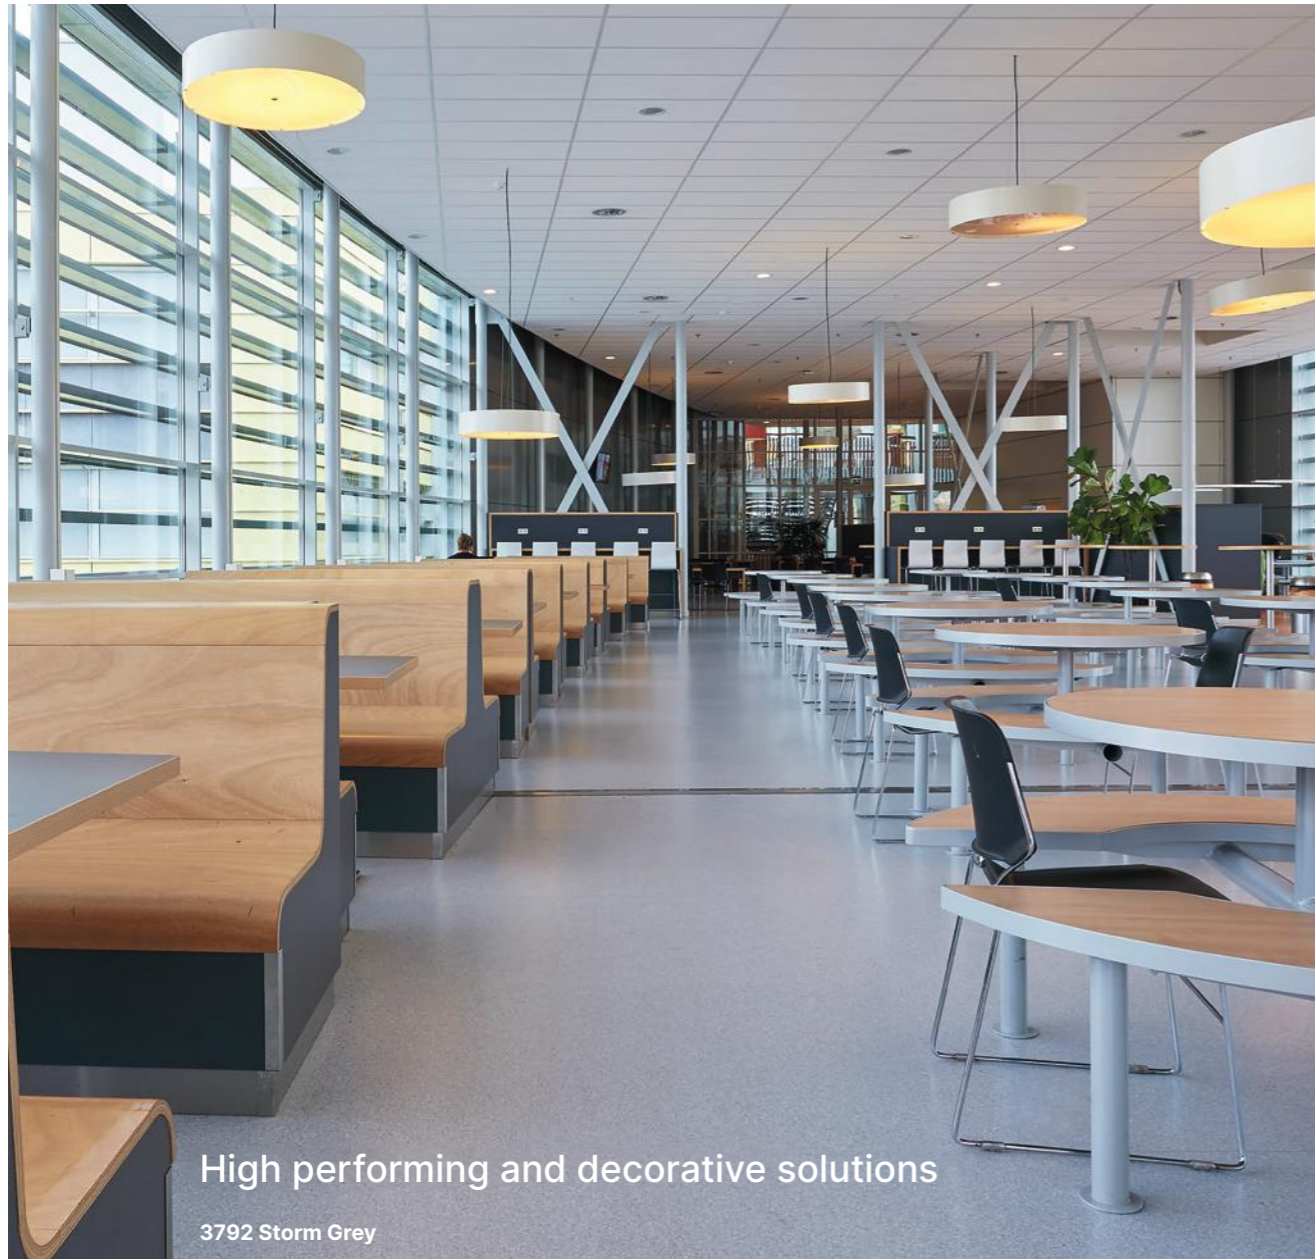

High performing and decorative solutions

3792 Storm Grey



Taralay Premium

Compact Comfort

Description			Compact	Comfort
Thickness	EN ISO 24346	mm	2.00	3.00 - 3.30
Wear layer thickness	EN ISO 24340	mm	> 1	> 1
Weight	EN ISO 23997	g/m ²	2580-2680	2800-3260
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	lm	20	25
Classification				
Norm / Product specification	-	-	EN ISO 10582	EN 651
European classification	EN ISO 10874	class	34 -43	34 -42
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet	DIN 51130	class	R10	R10
Performances				
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0
Wear group	-	group	T	T
Type binder content	EN ISO 10582	type	I	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20
Residual indentation (value)	-	mm	≈ 0.02	≈ 0.06
Impact sound insulation	EN ISO 717-2	dB	8	16 (Metallica range) 17 (All other ranges)
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6
Chemical products resistance	EN ISO 26987	-	OK	OK
Anti-bacterial activity (E.coli- S.aureus- MRSA) ⁽¹⁾	ISO 22196	-	99% inhibits growth	99% inhibits growth
Surface treatment	-	-	Evercare™	Evercare™
TVOC after 28 days	ISO 16000-6	µg/m ³	< 10	< 10
CE Marking				
CE	EN 14041			


(1) The implementation of an effective cleaning method is the best defence against infection.

Premium

Multilayered Flooring

- > Tough and durable, suitable for normal to high traffic areas
- > Most colour references available as both compact and comfort versions
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

Osmoz

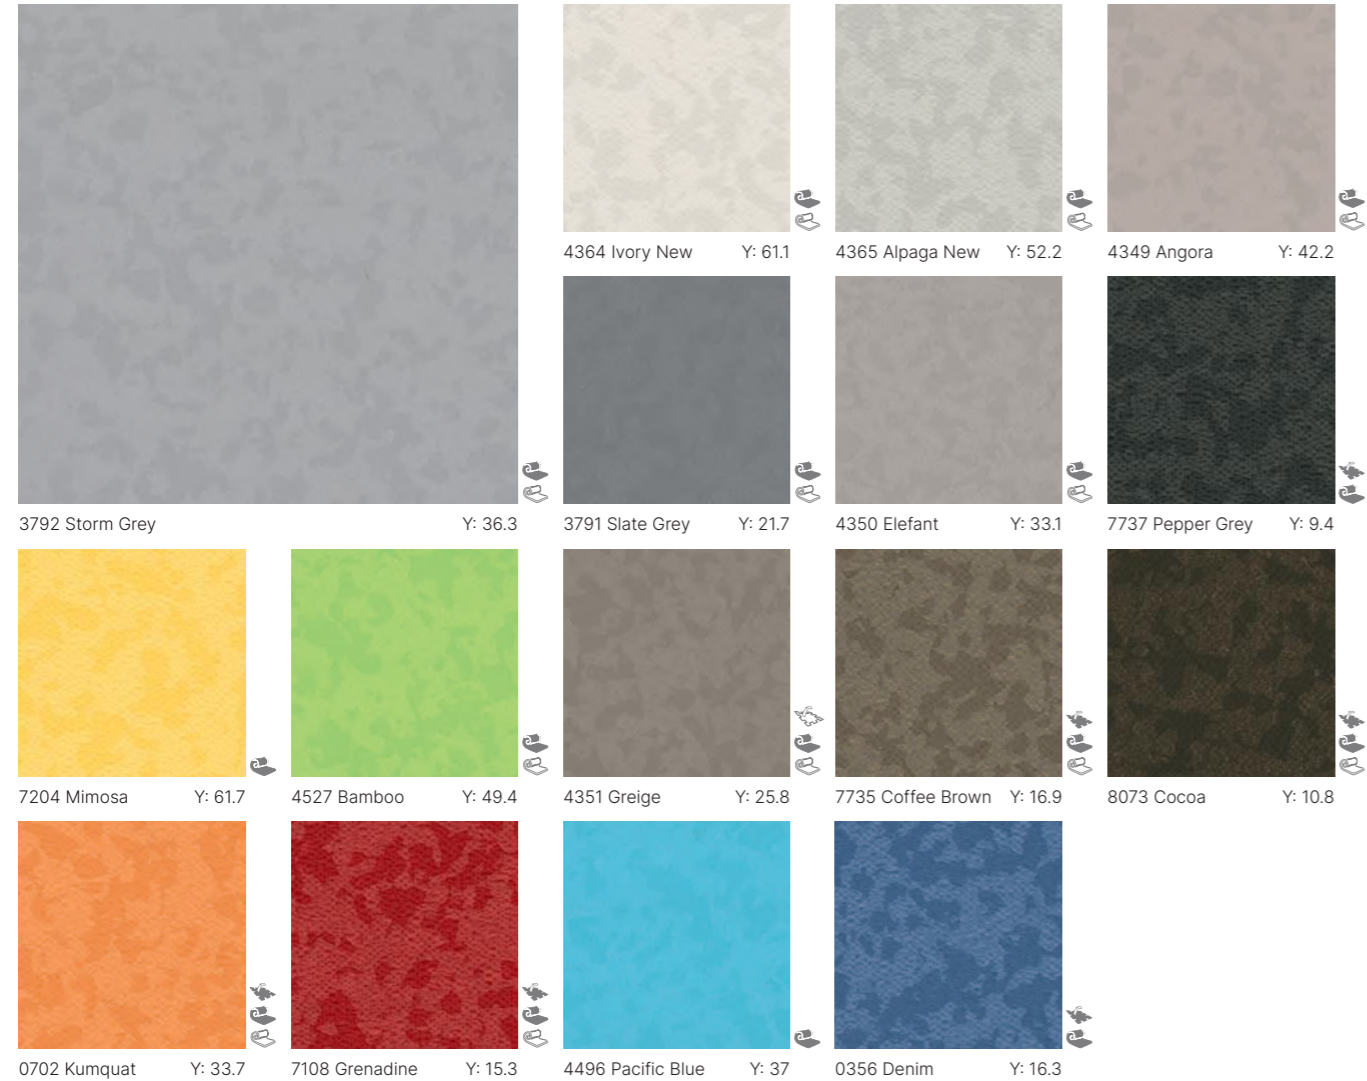

T Wear Group | **R10** Slip Resistant | **16_{dB}** Quiet Underfoot
Comfort - Metallic Range | **17_{dB}** Quiet Underfoot
Comfort - All Other Ranges | **VHD**

Min order quantity 500m² | **Evercare™** | 100% Recyclable | **Y** = Light Reflectance Value (LRV) | Weld Rods see page 198 | **Matt Finish**




3792 Storm Grey / 4351 Greige


Premium Multilayered Flooring

- > Tough and durable, suitable for normal to high traffic areas
- > Most colour references available as both compact and comfort versions
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs

Poesy

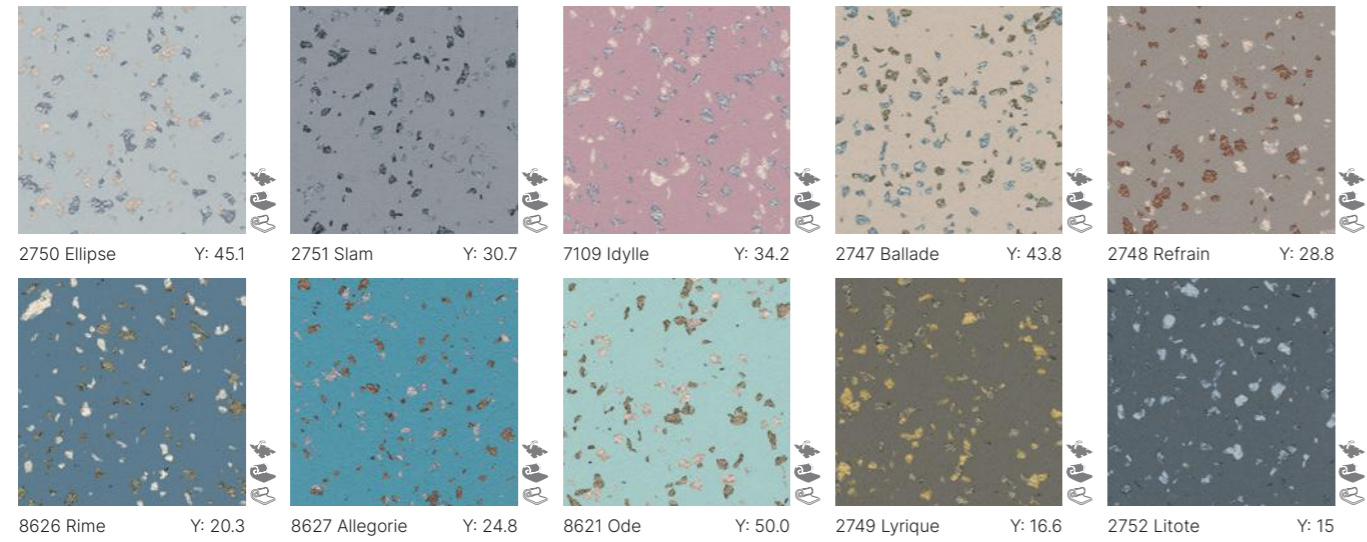

Neopolis

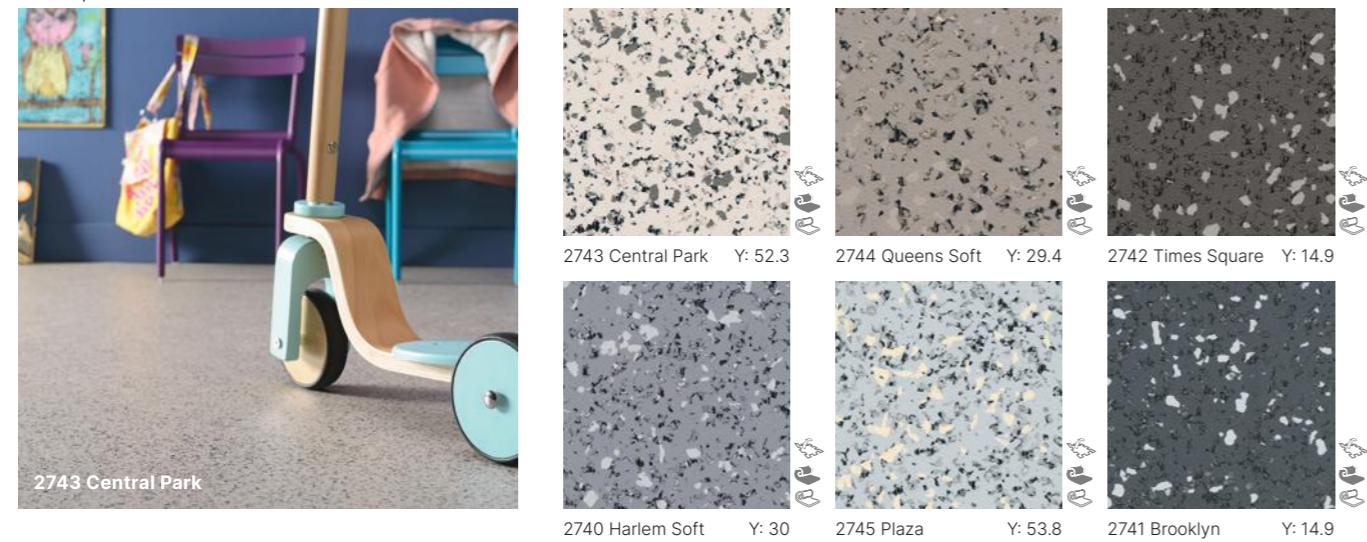

T Wear Group	R10 Slip Resistant	16 _{dB} Quiet Underfoot Comfort - Metallic Range	17 _{dB} Quiet Underfoot Comfort - All Other Ranges	VHD
Compact	Comfort	Attraction	Attraction	Evercare™
100% Recyclable		Y = Light Reflectance Value (LRV)	Weld Rods see page 198	Matt Finish




2750 Ellipse


Premium Multilayered Flooring

- > Tough and durable, suitable for normal to high traffic areas
- > Most colour references available as both compact and comfort versions
- > Revolutionary Evercare™ surface treatment providing unrivalled chemical and scratch resistance
- > No polish is required for the entire lifetime of the product - reducing maintenance costs


Indiana

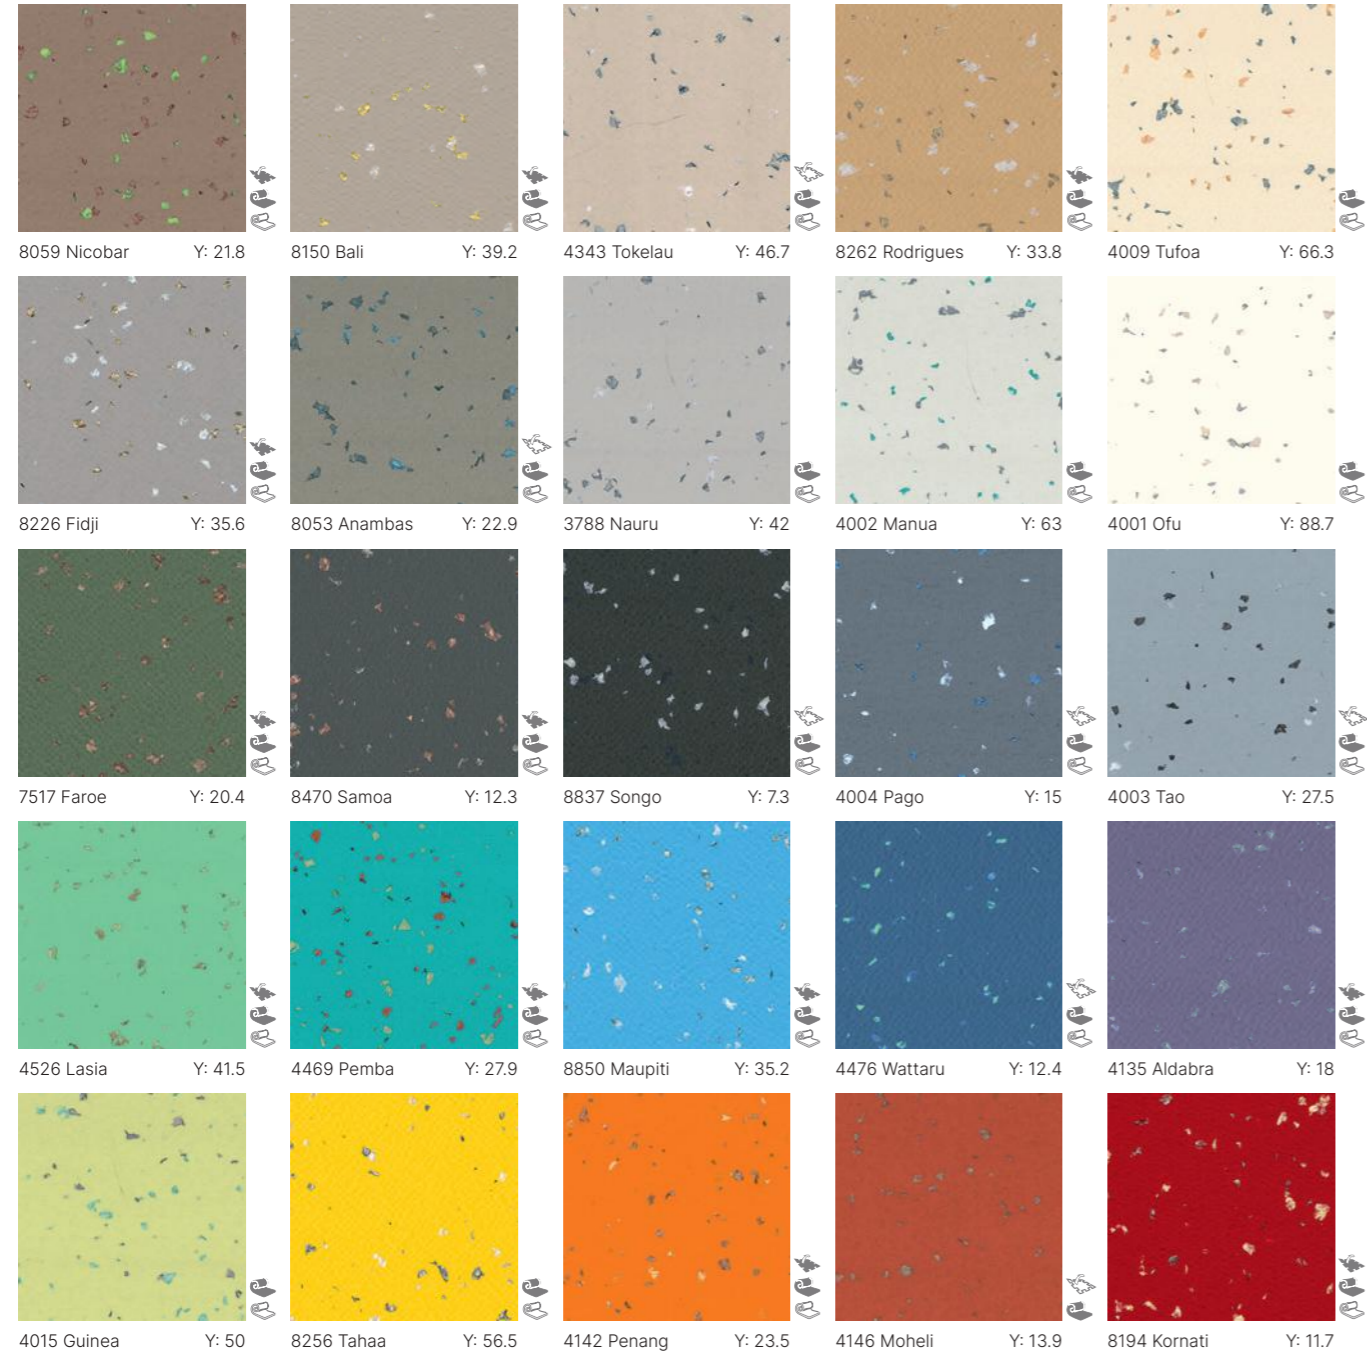

Metallica

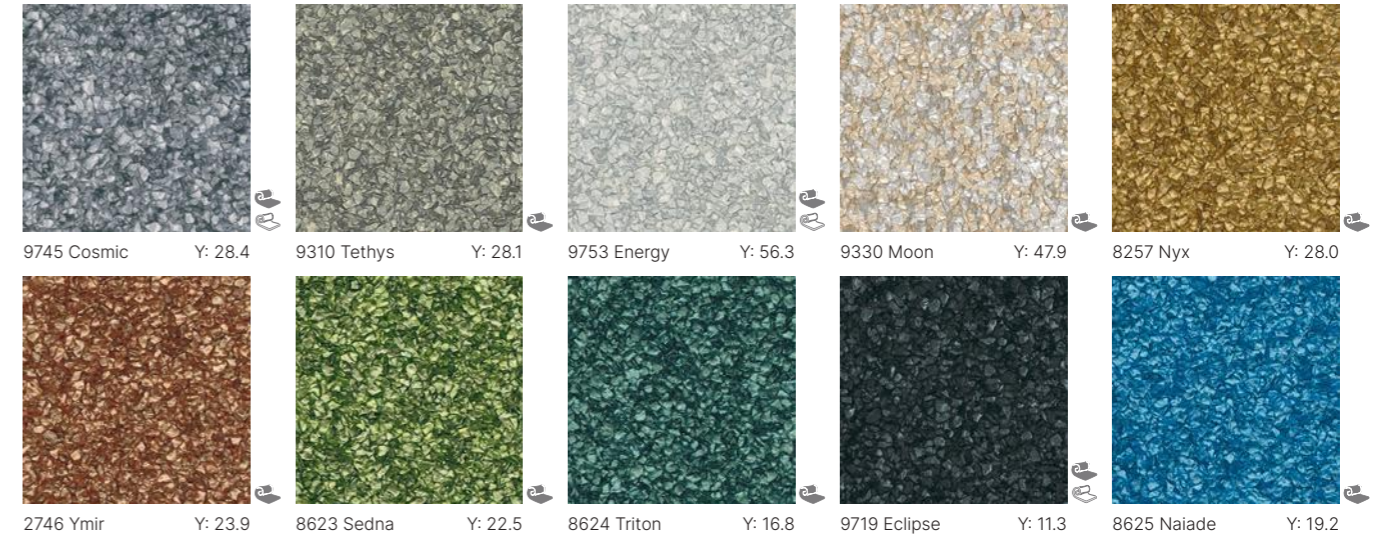

Brazilia

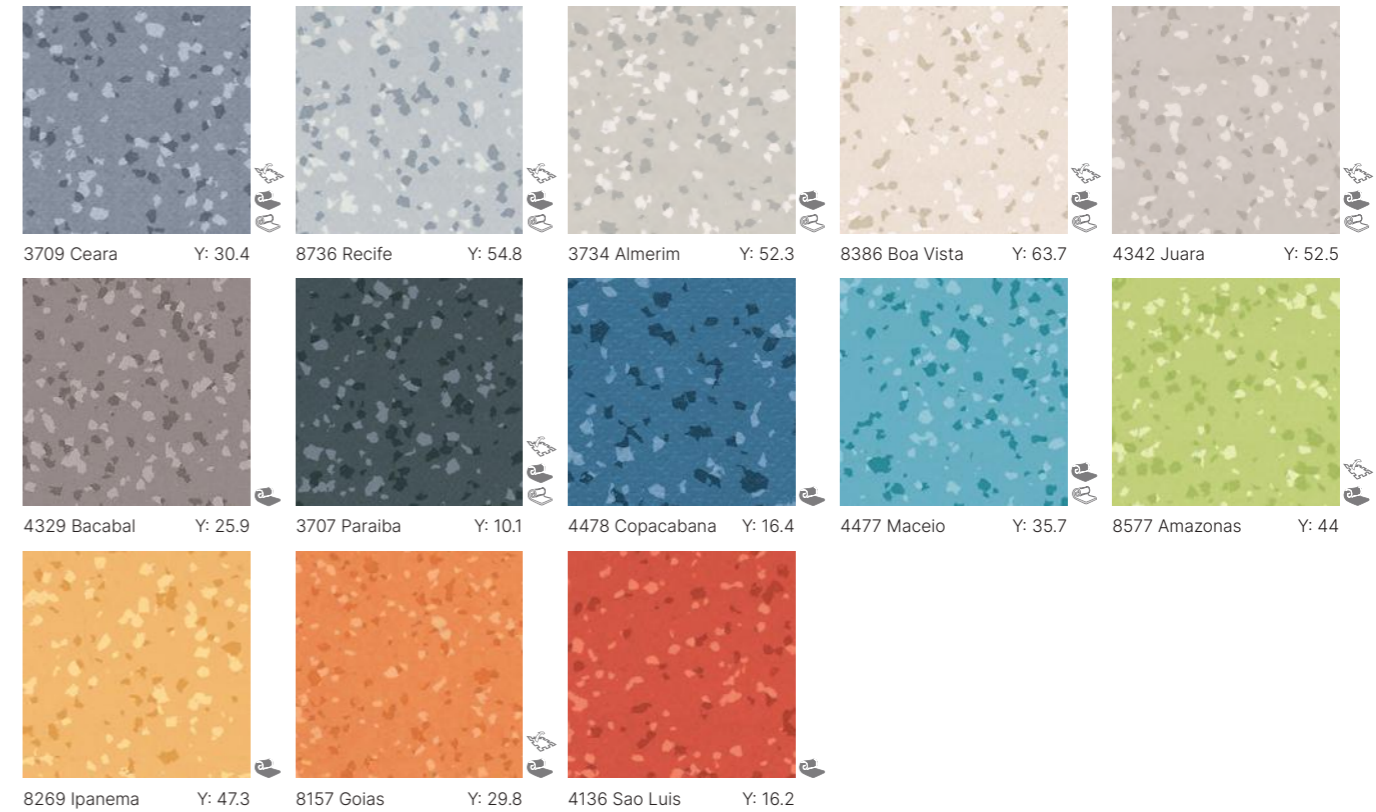

T Wear Group | **R10 Slip Resistant** | **16_{dB} Quiet Underfoot** (Comfort - Metallic Range) | **17_{dB} Quiet Underfoot** (Comfort - All Other Ranges) | **VHD**

Compact | **Comfort** | **Attraction** | **Attraction** (Min order quantity 500m²) | **Evercare™** | **100% Recyclable** | **Y = Light Reflectance Value (LRV)** | **Weld Rods see page 198** | **Matt Finish**

Taralay Multilayered Flooring

Taralay Impression Compact and Comfort ranges are hardwearing floors that are suitable for medium to high traffic areas including hospitals, schools, commercial and public areas. The range consists of a mix of vibrant colours, wood effects, leather effects and many pattern designs for optimum design choice. The range has ultra-low whole life costs thanks to the ProtecSol® 2 surface treatment which eliminates the need for polish for the full life of the flooring. All colour references are available as a Taralay Impression Compact and Comfort Plus option, which has a 0.90mm thick wearlayer and is subject to a 800sqm minimum order quantity.

Taralay Initial Compact and Comfort ranges are hardwearing floors that are suitable for normal to high traffic areas. The comfort version offers a 19dB sound rating, which is ideal for those applications where sound insulation is key. Treated with ProtecSol® surface treatment the floors require no polish for the lifetime of the product. Available in 32 references, the range incorporates woods, concretes and textile designs as well as natural and vibrant colour palettes.

Taralay Libertex is a new generation of Looselay flooring with an innovative MAX3 layer system for enhanced durability, acoustics and easy installation. You can save time and cost with this solution, whereby minimal sub-floor preparation is required, it offers excellent 19dB sound reduction and is hygienic and easy to clean thanks to its unique ProtecSol® surface treatment.



The ideal flooring for modern interiors

0727 Sycamore Vanilla



Description	Taralay Impression				Taralay Initial		Taralay Libertex				
	Compact	Compact Plus	Comfort	Comfort Plus	Compact	Comfort	Comfort				
Thickness	EN ISO 24346	mm	2.0	2.25	3.35	3.55	2.00	3.35	3.65		
Wear layer thickness	EN ISO 24340	mm	0.70	0.90	0.65	0.90	0.70	0.65	0.70		
Weight	EN ISO 23997	g/m ²	2635	2975	2825	3265	2635	2825	2900		
Width of sheet	EN ISO 24341	cm	200	200	200	200	200	200	200 / 400		
Length of sheet	EN ISO 24341	lm	25	20	25	20	25	25	20		
Classification											
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582	EN ISO 11638	EN ISO 11638	EN ISO 10582	EN ISO 11638	EN ISO 11638		
European classification	EN ISO 10874	class	34-43	34-43	34-42	34-42	34-43	34-42	34		
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1	Bfl-s1	Cfl-s1	Bfl-s1	Bfl-s1	Cfl-s1		
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2	< 2	< 2	< 2		
Slip resistance	DIN 51130	class	R10	R10	R10	R10	R10	R10	R10		
Performances											
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0		
Wear group	-	group	T	T	T	T	T	T	T		
Type binder content	EN ISO 10582	type	I	I	-	-	I	-	-		
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40		
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.20	≤ 0.20	≤ 0.10	≤ 0.20	≤ 0.20		
Residual indentation (value)	-	mm	≈ 0.03	≈ 0.03	≈ 0.08	≈ 0.08	≈ 0.03	≈ 0.10	≈ 0.05		
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25	0.25	0.25	0.25		
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6		
Impact sound insulation	EN ISO 717-2	dB	8	8	19	19	6	19	19		
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	OK	OK	OK	OK		
Anti-bacterial activity (E.coli- S.aureus- MRSA)(1)	ISO 22196	-	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth	>99% inhibits growth		
Surface treatment	-	-	ProtecSol® 2	ProtecSol® 2	ProtecSol® 2	ProtecSol® 2	ProtecSol®	ProtecSol®	ProtecSol®		
TVOC after 28 days	ISO 16000-6	µg/m ³	< 10	< 10	< 10	< 10	< 10	< 10	< 100		
CE Marking											
CE	EN 14041										

(1) The implementation of an effective cleaning method is the best defence against infection.

Taralay Impression

Multilayered Flooring

- > Available as both compact and comfort versions
- > Excellent sound insulation properties (19dB) with the comfort option
- > Tough and durable, suitable for normal to high traffic areas
- > Protecsol®2 surface treatment, no polish for life!

Herringbone



0722 Herringbone Blond
Y: 34.9



0724 Herringbone Chatain
Y: 26.7

Sycamore



0727 Sycamore Vanilla
Y: 31.1




0725 Sycamore Light Brown
Y: 25.6




0726 Sycamore Dark
Y: 10.5

Habana




0538 Habana Vinales
Y: 40.7




0522 Habana Trinidad
Y: 25.6

Infinity



0720 Infinity Aube
Y: 47.9



0680 Infinity Greige
Y: 33.1



0719 Infinity Lichen
Y: 26.4

Portobello



0773 Portobello
Y: 25.3



0722 Herringbone Blond / 0538 Habana Vinales

T Wear Group	R10 Slip Resistant	19dB Quiet Underfoot Comfort	VHD
Compact	Comfort	Protecsol®2	100% Recyclable
Y = Light Reflectance Value (LRV)		Weld Rods see page 198	Matt Finish

Taralay Impression


Multilayered Flooring

- > Available as both compact and comfort versions
- > Excellent sound insulation properties (19dB) with the comfort option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!

Walnut



1314 Walnut Brown
Y: 15.8



0528 Walnut Cream
Y: 53.6

Noma



0371 Noma Rustic
Y: 23.2



0373 Noma Ice
Y: 52




0519 Noma Beige
Y: 28.5

Renzo



0068 Renzo Pecan
Y: 19.4




0025 Renzo Taupe
Y: 16

Charme



0723 Charme Pecan
Y: 24.3




0721 Charme Natural
Y: 33.2

Moon Island




0760 Moon Island
Y: 29.8

Loft




0671 Loft Light Brown
Y: 26.4



0734 Loft Chestnut
Y: 25.9

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort | VHD

Compact | Comfort | ProtecSol®2 | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 198

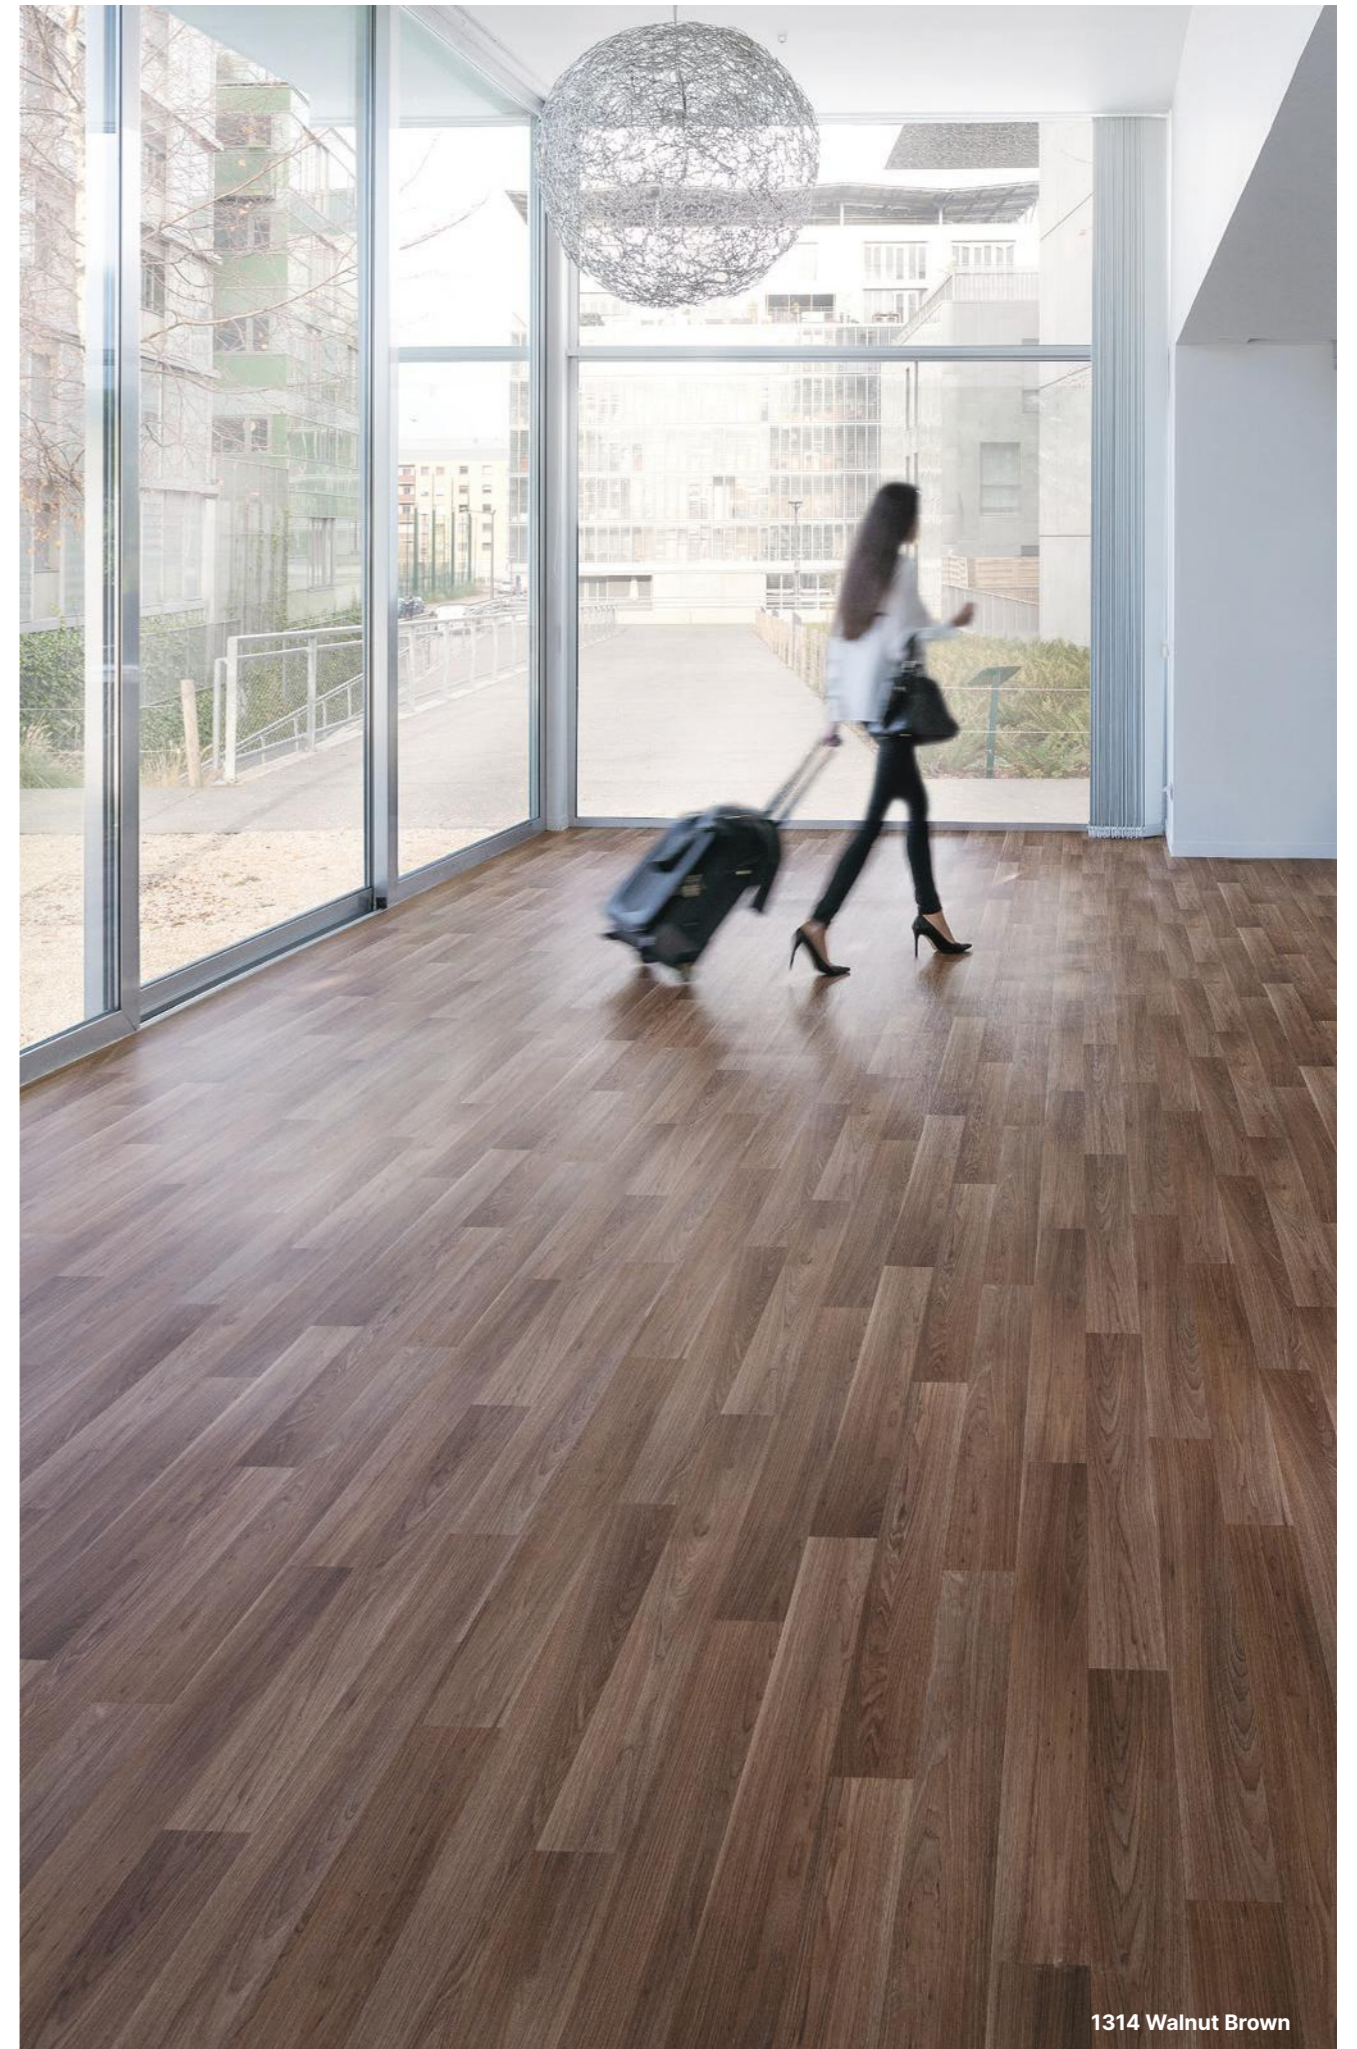


1314 Walnut Brown

Taralay Impression


Multilayered Flooring

- > Available as both compact and comfort versions
- > Excellent sound insulation properties (19dB) with the comfort option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!


Uni Matt

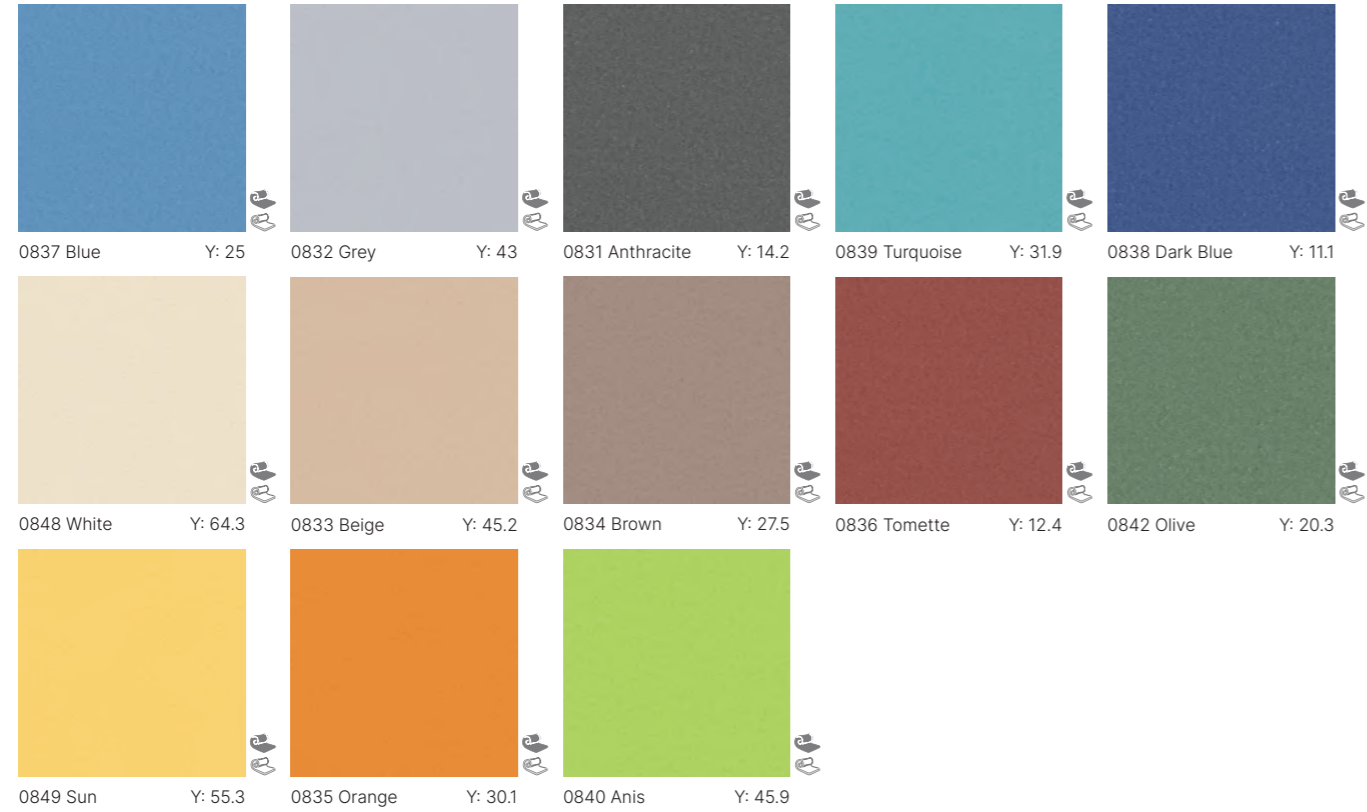


Leather

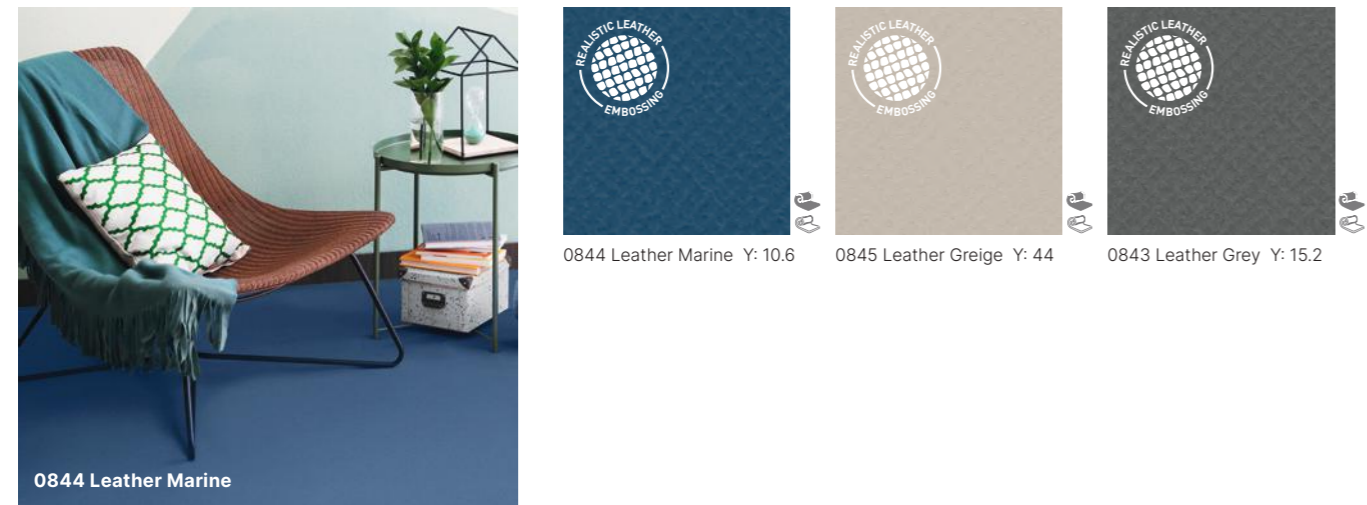

Cemento

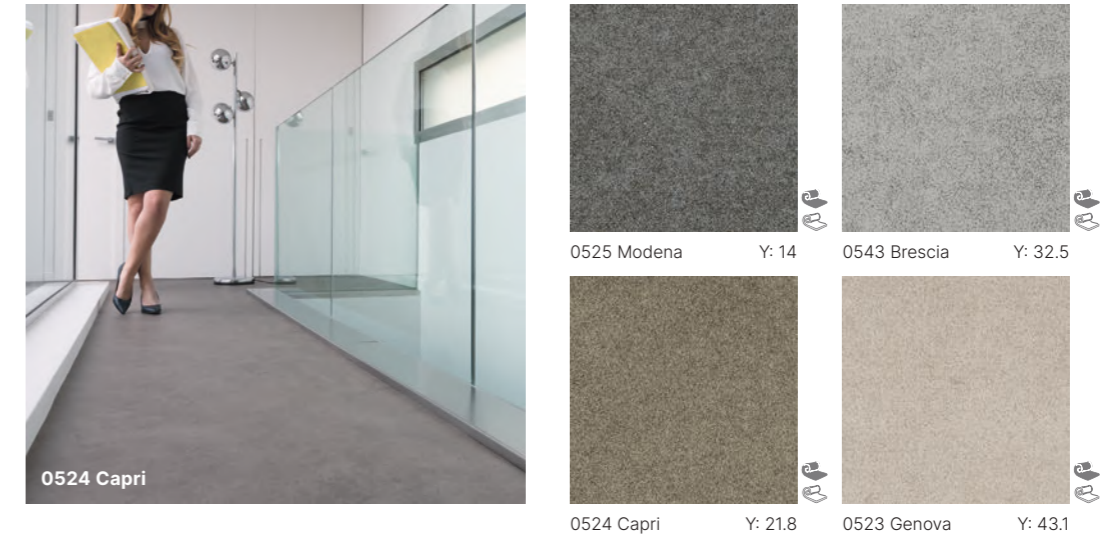


Trame

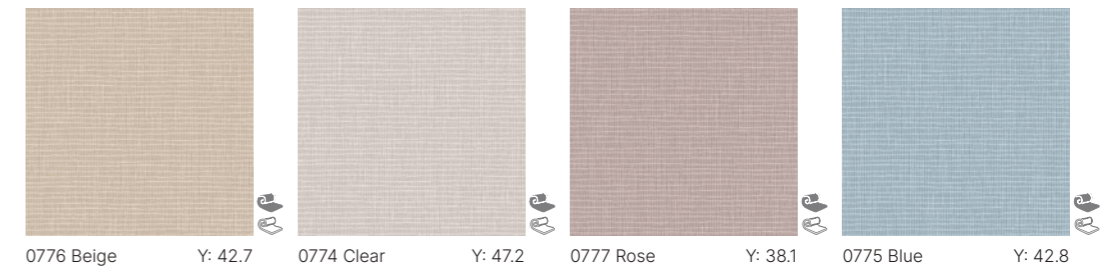

Mohair



Gentlemen

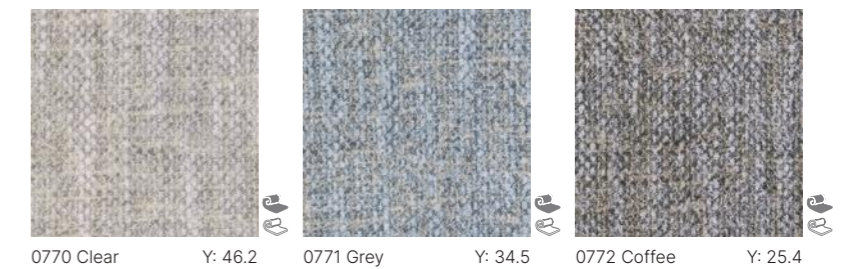

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort | VHD


Compact | Comfort | ProtecSol®2 | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 199 | Matt Finish

Taralay Impression


Multilayered Flooring

- > Available as both compact and comfort versions
- > Excellent sound insulation properties (19dB) with the comfort option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!

Kubes

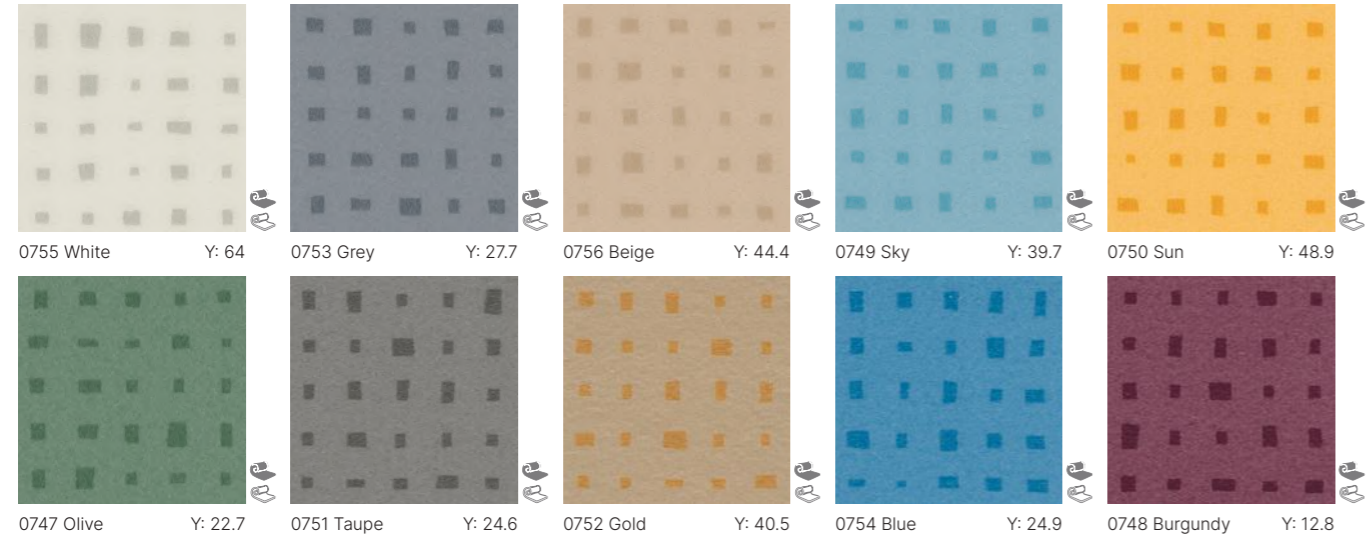


Corner

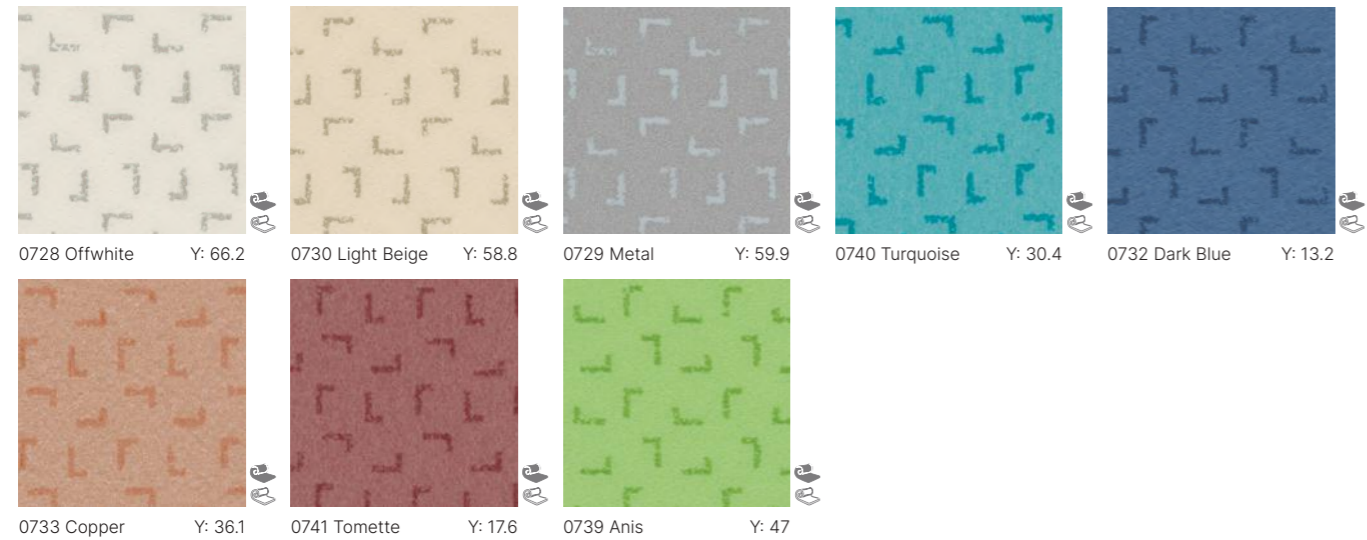

T Wear Group |
 R10 Slip Resistant |
 19dB Quiet Underfoot Comfort |
 VHD

Compact |
 Comfort |
 ProtecSol®2 |
 100% Recyclable |
 Y = Light Reflectance Value (LRV) |
 Weld Rods see page 199 |
 Matt Finish

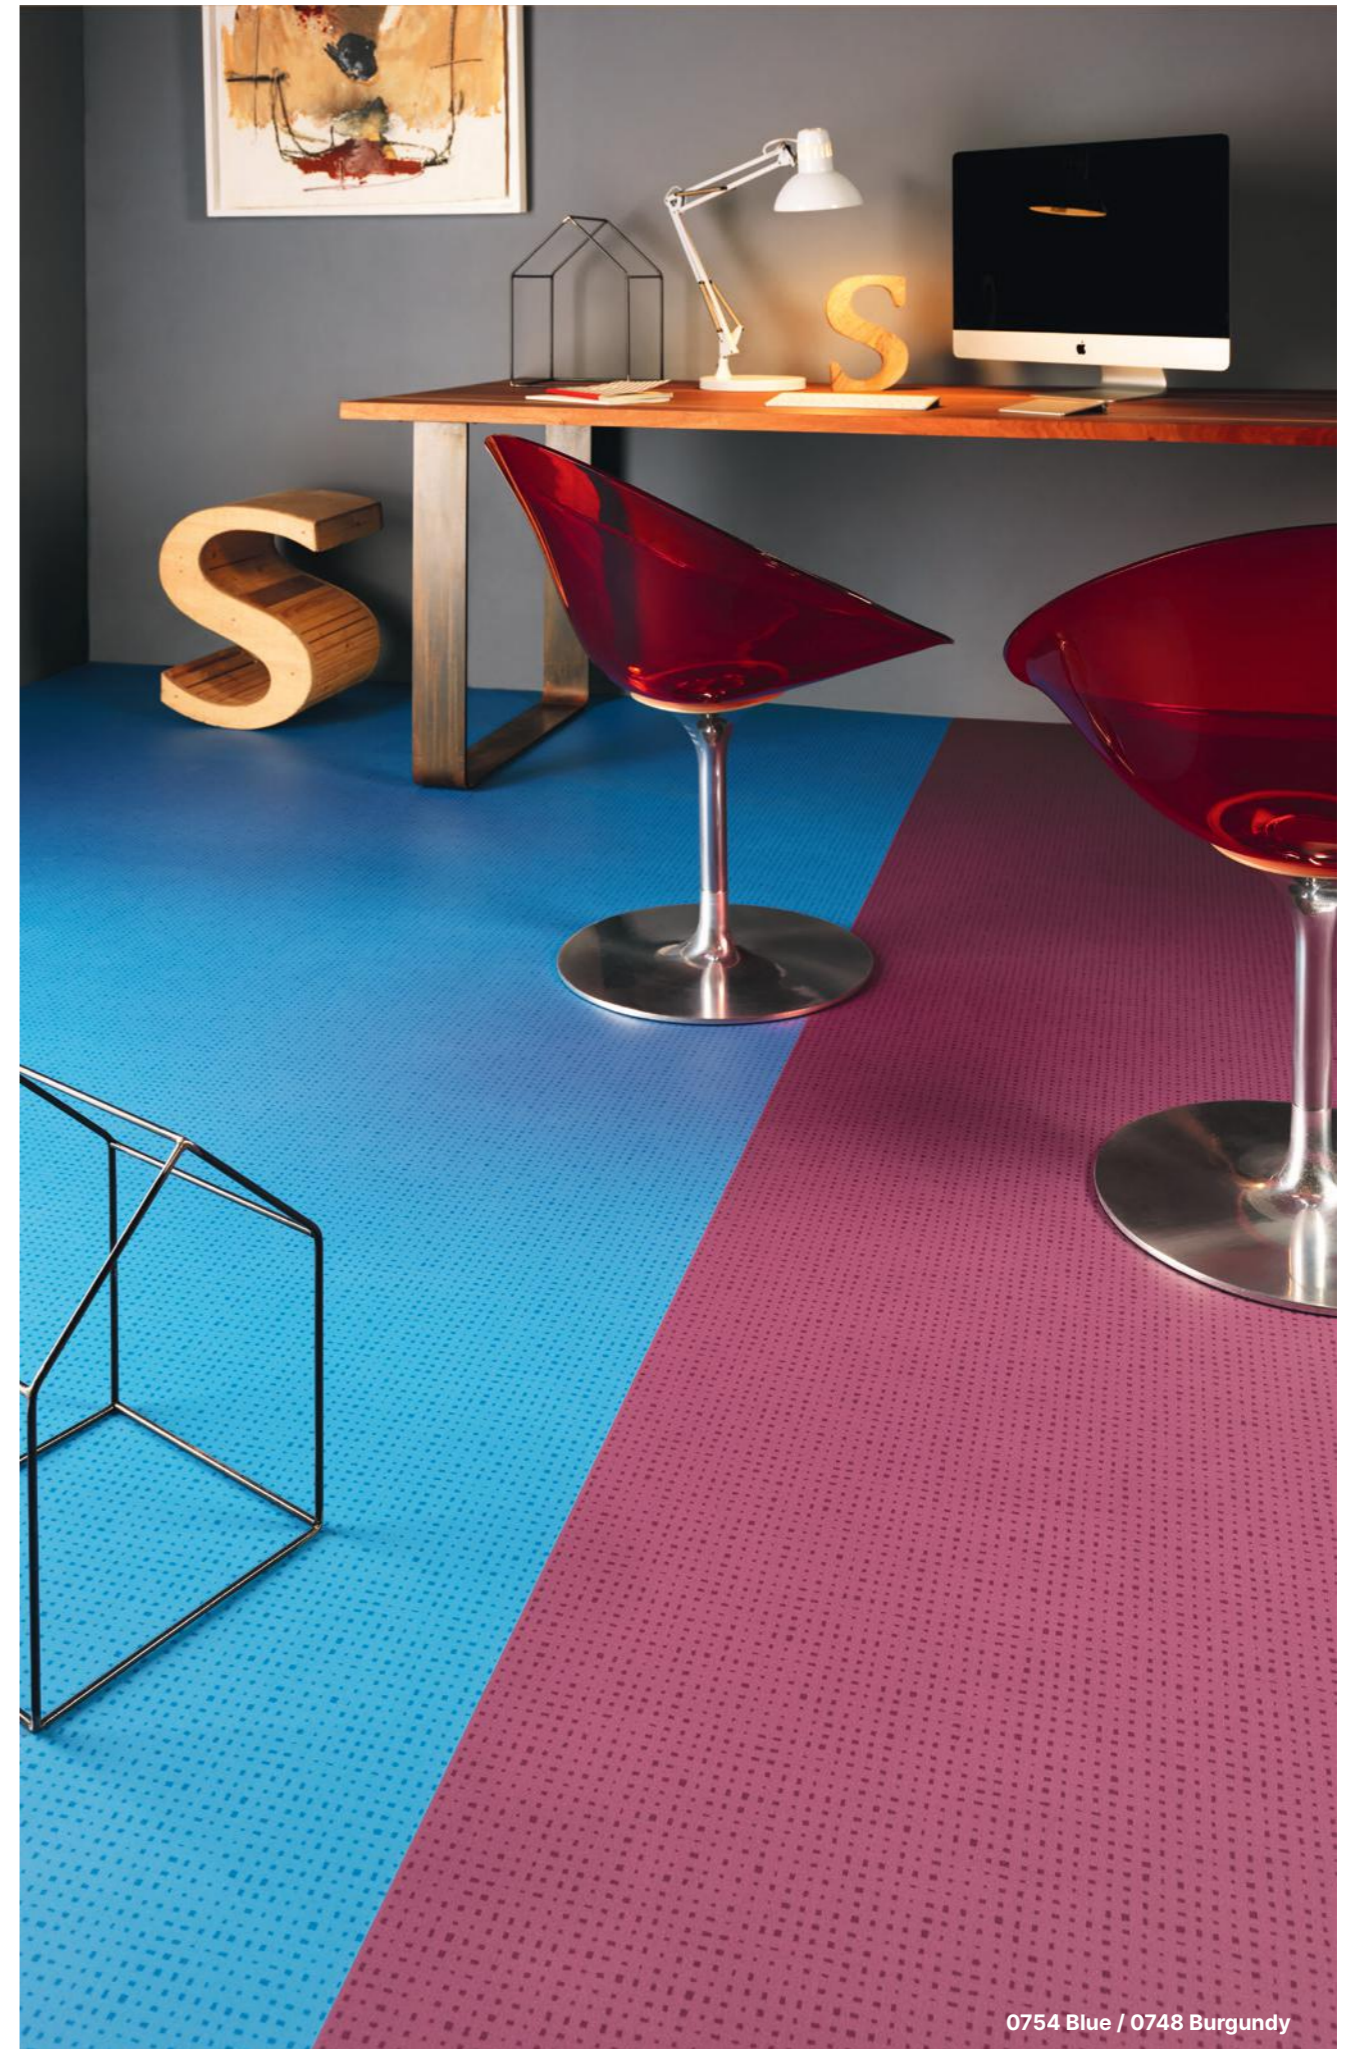


0754 Blue / 0748 Burgundy

Taralay Impression


Multilayered Flooring

- > Available as both compact and comfort versions
- > Excellent sound insulation properties (19dB) with the comfort option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol®2 surface treatment, no polish for life!

Nest

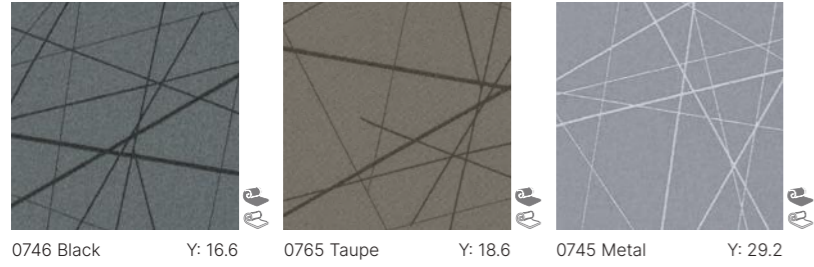

Rice

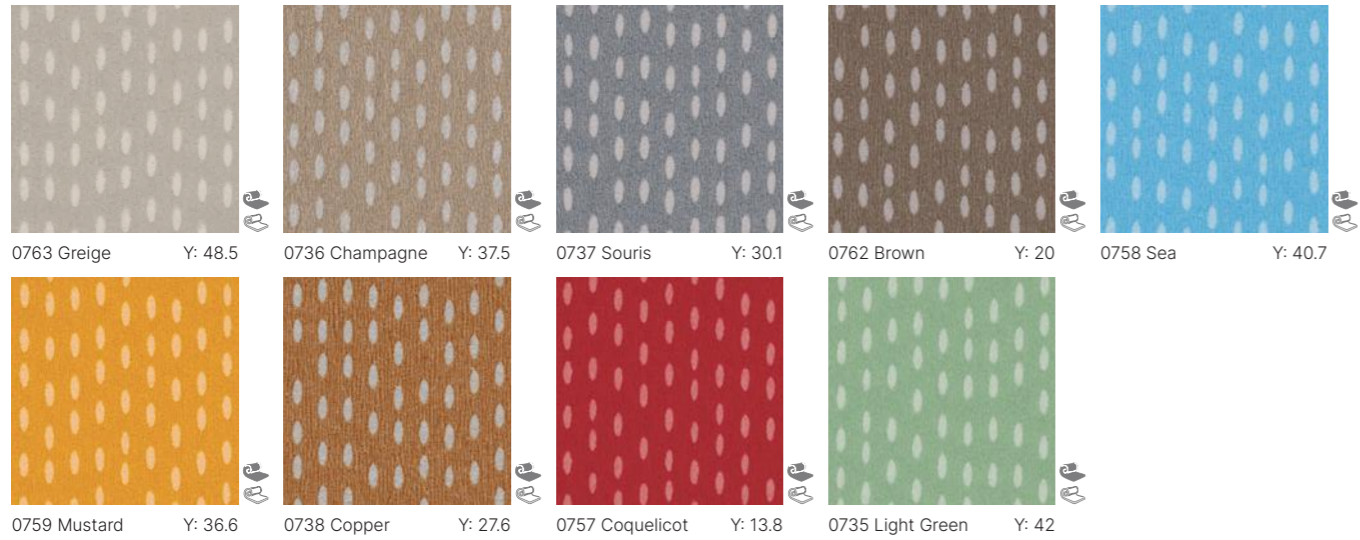

Stars



T Wear Group |
 R10 Slip Resistant |
 19dB Quiet Underfoot Comfort |
 VHD

Compact |
 Comfort |
 ProtecSol®2 |
 100% Recyclable |
 Y = Light Reflectance Value (LRV) |
 Weld Rods see page 199 |
 Matt Finish



0746 Black




BEYOND THE NORM

As you are unique and each of your projects represents a new challenge, Gerflor gives you the chance to stand out.

One atmosphere, one style, one floor, but several possibilities...

For further information on the My Taralay Impression digital print service please contact your Gerflor representative.

3 POSSIBILITIES



1 - COLOUR

Set the tone of your project by recolouring the design of your choice in our Taralay Impression range*

*20 designs available for colouring



2 - COLLECTION


Leave a big impression on the atmosphere that you create thanks to our **unique collection of 50 designs** that reflect the major decorative trends that are popular today.

All of our customisable designs:
myfloorbygerflor.com



3 - CUSTOMISATION

Enhance the visual identity of your company or that of your clients by printing a logo and/or your own designs.



1 - COLOUR

the possibility to recolour 20 designs in the Taralay Impression range as you wish



1.


Select a design* from the Taralay Impression range

*20 designs available for colouring



2.

Change the colour scheme as you wish



3.


Receive your floor sample within 10 days of acceptance of your inquiry by Gerflor




4.

Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order


STAR DESIGN
STANDARD COLOUR SCHEME

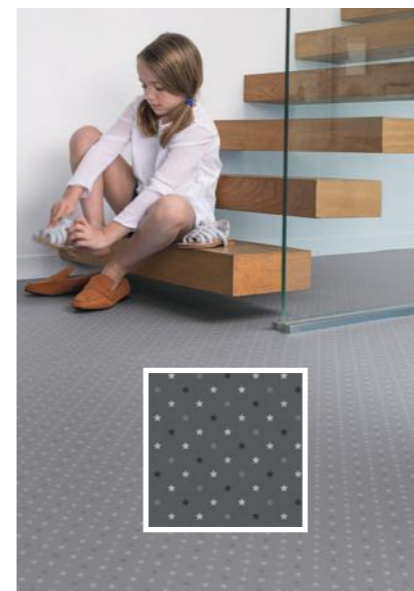

CUSTOMISED
COLOUR 1

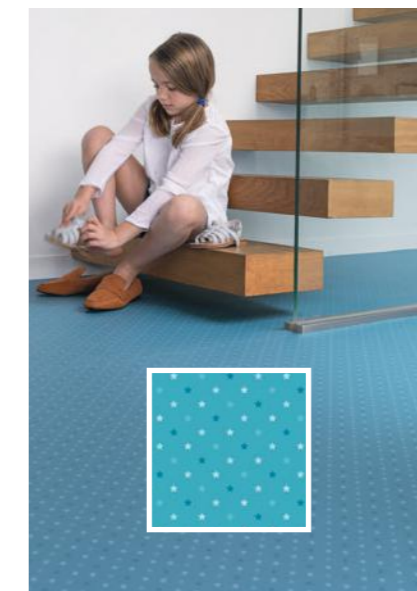

CUSTOMISED
COLOUR 2

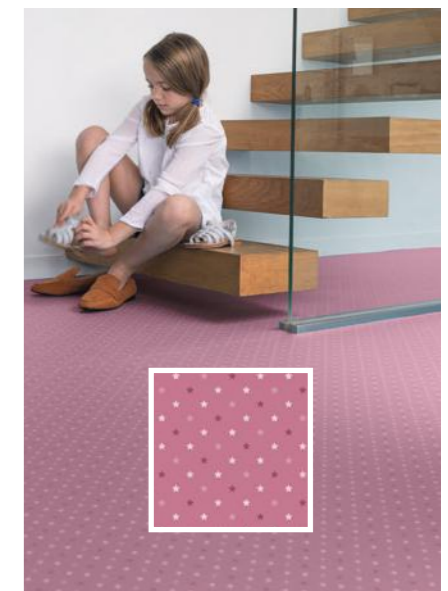


Minimum order: 50m² (special pricing system)

If you have any questions (pricing, feasibility, technical information), do not hesitate to contact your sales representative



2 - COLLECTION

the possibility to select from among **50 exclusive designs**



1.


Draw inspiration from Gerflor's 50 exclusive designs and change, if you so wish, the design's colour scheme on

www.myfloorbygerflor.com




2.

View your customised design on your computer screen before approving it



3.

Receive your floor sample within 10 days of acceptance of your inquiry by Gerflor



4.

Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order



3 - CUSTOMISATION

the possibility to make your floor unique



1.

Send us your own file in accordance with the process described in our specifications




2.

Approval by our technical team



3.

Receive your floor sample within 10 days and before all of your floor is made



4.

Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order

4 major TRENDS



NATURELAND

Subtle and elegant contrasts to create a gentle and peaceful atmosphere




URBAN

A bohemian and welcoming mix of styles



FUN

An explosion of colour and patterns for fun-loving and creative people



RETRONAUTE

An industrial look inspired by New York lofts: raw materials and sober colours



File formats accepted



Files free from copyright only



300 DPI resolution



RAL, Pantone and NCS colour reference



Minimum order: 50m² (special pricing system)


If you have any questions (pricing, feasibility, technical information), do not hesitate to contact your sales representative

Taralay Initial

Multilayered Flooring

- > Available as both compact and comfort versions
- > Excellent sound insulation properties (19dB) with the comfort option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol® surface treatment, no polish for life!

Miami

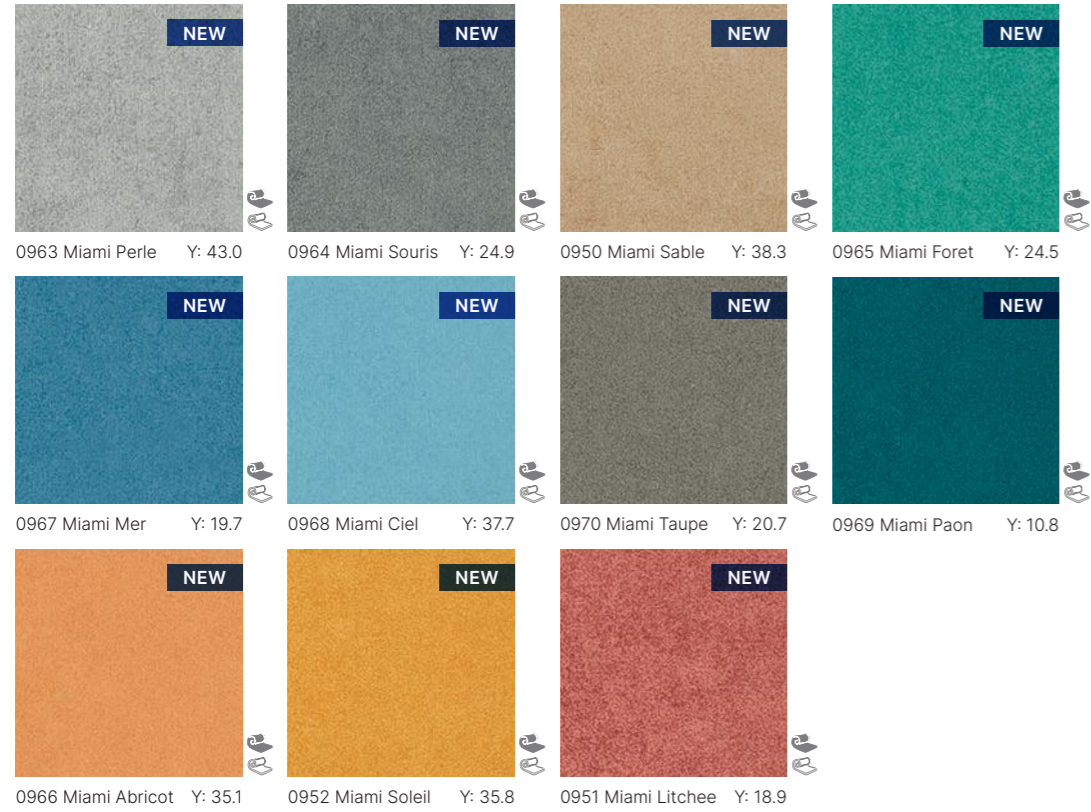


Spider



T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort

Compact | Comfort | ProtecSol® | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 199

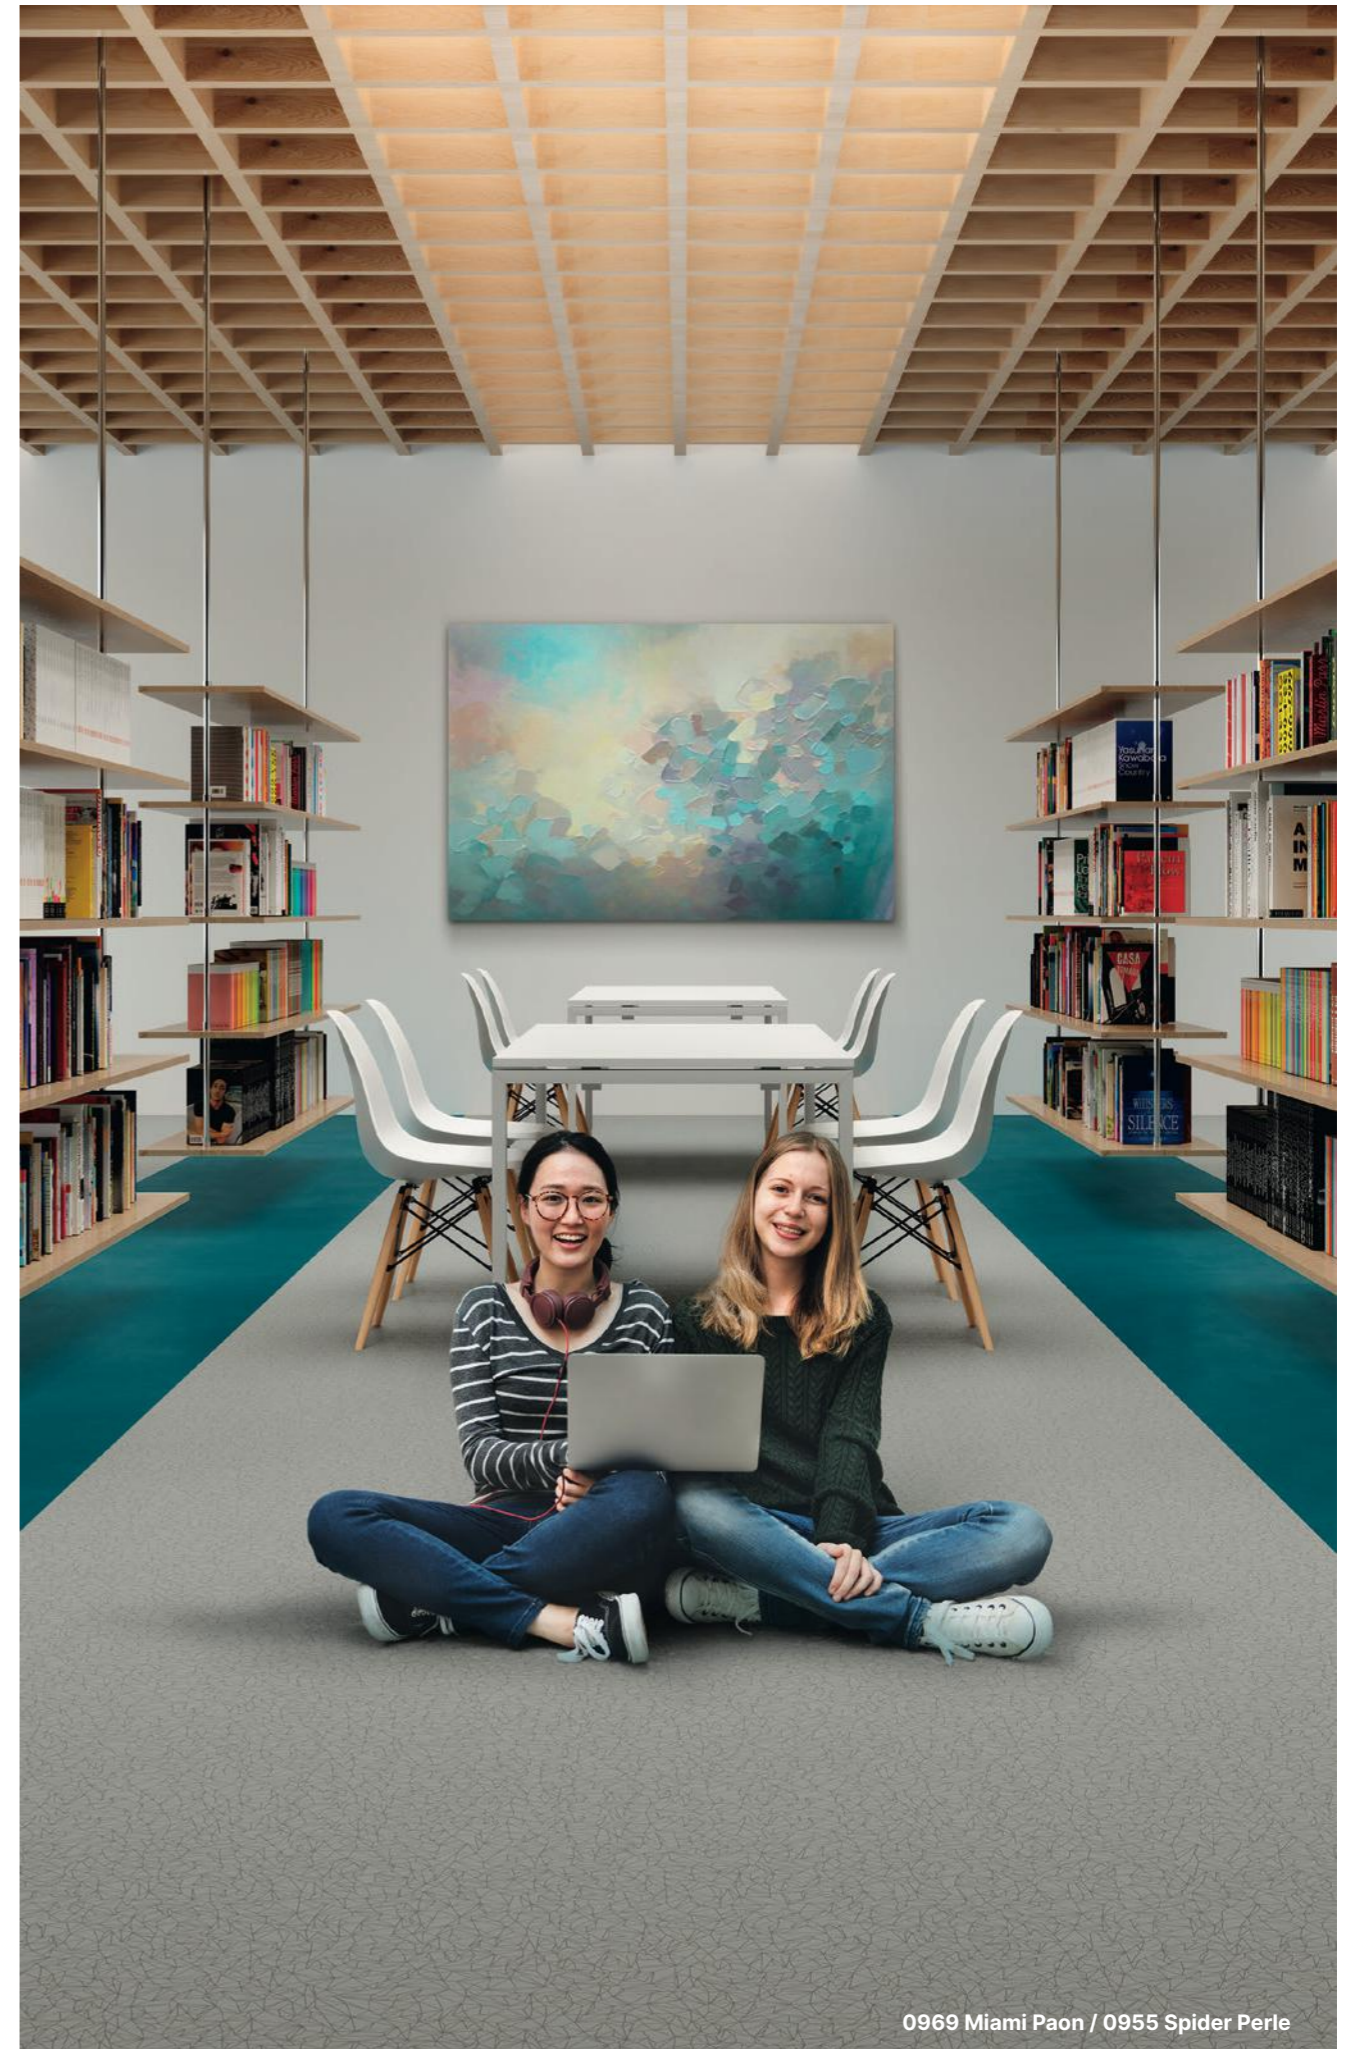

0969 Miami Paon / 0955 Spider Perle

Taralay Initial

Multilayered Flooring

- > Available as both compact and comfort versions
- > Excellent sound insulation properties (19dB) with the comfort option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol® surface treatment, no polish for life!

Ranch



0773 Ranch
Y: 25.3



0953 Ranch Anthracite
Y: 16.4

Filament



0826 Filament Grey
Y: 39.4



0799 Filament Light
Y: 31.7

Bostonian



0961 Bostonian Honey
Y: 27.6



0959 Bostonian Brown
Y: 14.7




0960 Bostonian Grey
Y: 14.4

Noma



0698 Noma Naturel
Y: 45.9



0588 Noma Clair
Y: 36.5


Twist



0979 Twist White
Y: 60.0



0977 Twist Grey
Y: 19.5




0978 Twist Blond
Y: 46.1



0980 Twist Brown
Y: 18.0

Habana



0797 Habana Ivory
Y: 52.7



0828 Habana Beige
Y: 35.8

Esterel



0636 Esterel Blond
Y: 25.6

Renzo



0590 Renzo Steel
Y: 14.5

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort

Compact | Comfort | ProtecSol® | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 199




0977 Twist Grey

Taralay Initial


Multilayered Flooring

- > Available as both compact and comfort versions
- > Excellent sound insulation properties (19dB) with the comfort option
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol® surface treatment, no polish for life!

Diversion

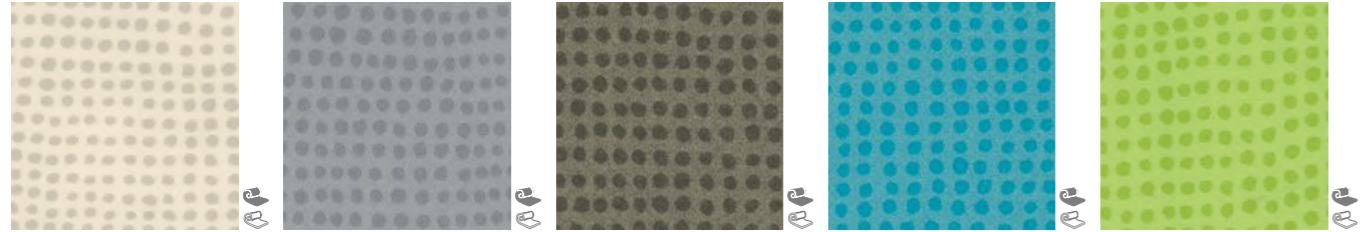

0047 Diversion Ivoire Y: 60.7 0824 Diversion Souris Y: 36.7 0049 Diversion Carbone Y: 13.7 0825 Diversion Turquoise Y: 30.5 0515 Diversion Kiwi Y: 45.0

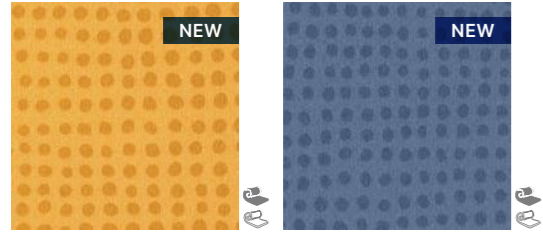

0949 Diversion Soleil Y: 40.8 0962 Diversion Marine Y: 16.2

Strada



0791 Strada Metallic Y: 22.3 0790 Strada Chrome Y: 21.4 0465 Strada Ciment Y: 25.7


Urban



0958 Urban Beige Y: 34.0 0037 Urban Souris Y: 34.8 0035 Urban Gris Y: 24.1

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort

Compact Comfort | ProtecSol® | 100% Recyclable | Y = Light Reflectance Value (LRV) | Weld Rods see page 200

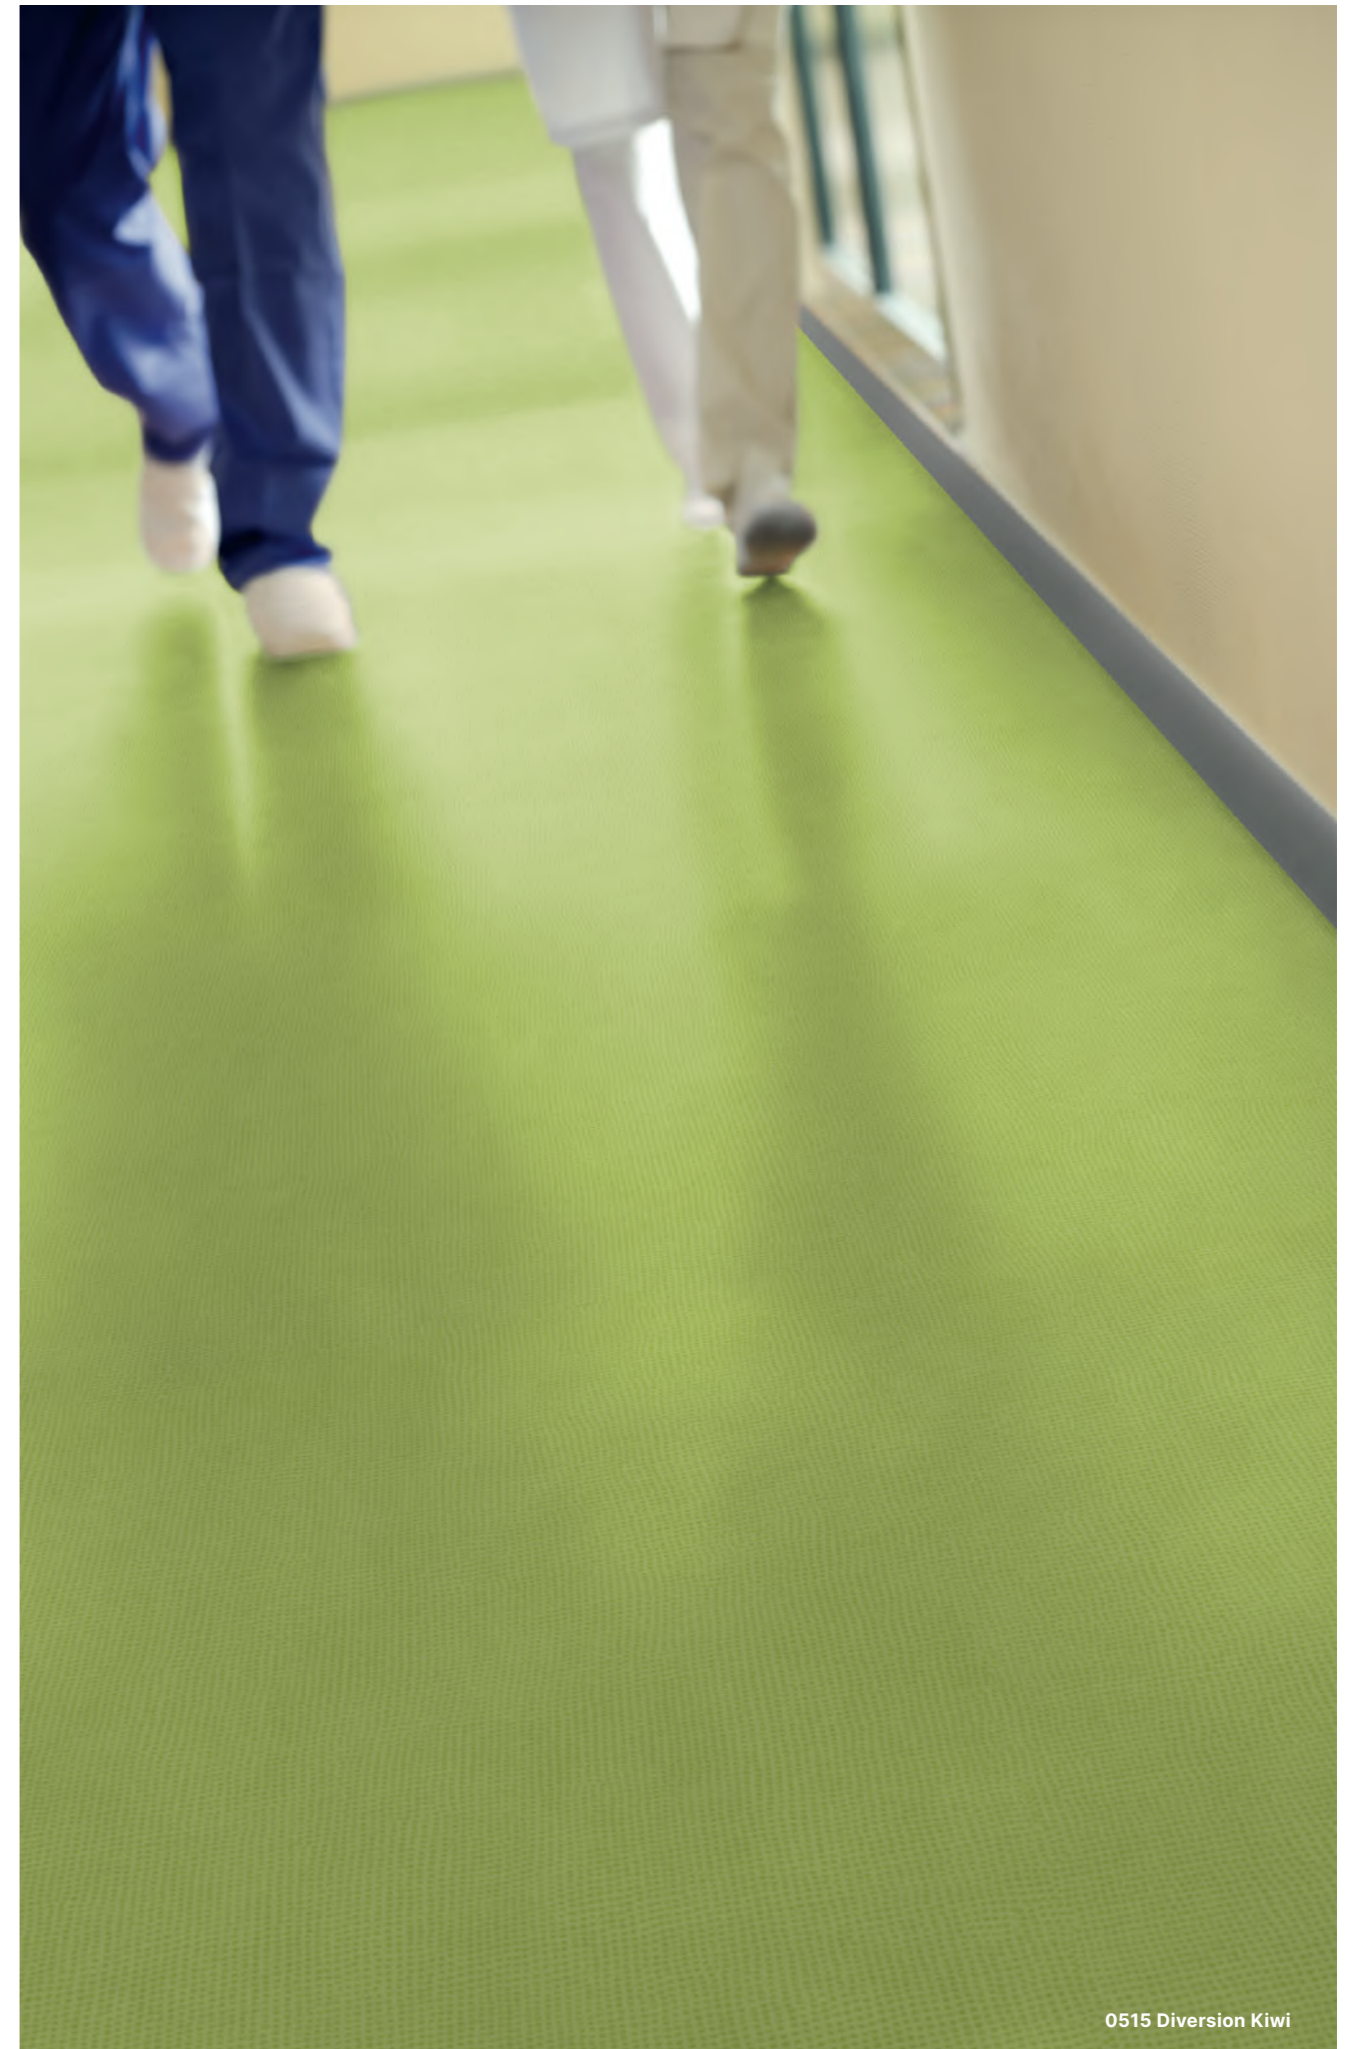

0515 Diversion Kiwi

Taralay Libertex

Multilayered Flooring

NEW RANGE

- > Available in comfort only. Excellent sound insulation properties (19dB)
- > Looselay product with innovative MAX3 3-layer system: Direct laying, No dry time, No activity loss
- > Tough and durable, suitable for normal to high traffic areas
- > ProtecSol® surface treatment, no polish for life!

Legend



2243 Legend Chestnut
Y: 31.0




2242 Legend Country
Y: 26.0



1430 Legend Grey
Y: 18.0

Pure Oak




0720 Pure Oak Clear
Y: 31.0




1751 Pure Oak Grey
Y: 20.0


Skandi Oak



2246 Skandi Oak Toffee
Y: 25.0



2245 Skandi Oak Natural
Y: 28.0



2244 Skandi Oak Clear
Y: 43.0

Hossegor



2247 Hossegor Latte
Y: 38.0




2241 Cacoon Silver Brown
Y: 34.0

Amsterdam



2151 Amsterdam Light Grey
Y: 39.0



2152 Amsterdam Grey
Y: 26.0




2153 Amsterdam Anthracite
Y: 12.0

Paros



2248 Paros Clear
Y: 43.0


Reflect




2249 Reflect Sea
Y: 24.0




2250 Reflect Forest
Y: 43.0




2251 Reflect Sunny
Y: 28.0



2252 Reflect Flower
Y: 18.0



1785 Reflect Earth
Y: 32.0



2253 Reflect Silver
Y: 31.0

T Wear Group | R10 Slip Resistant | 19dB Quiet Underfoot Comfort




ProtecSol®



100% Recyclable

Y = Light Reflectance Value (LRV)

Weld Rods see page 200

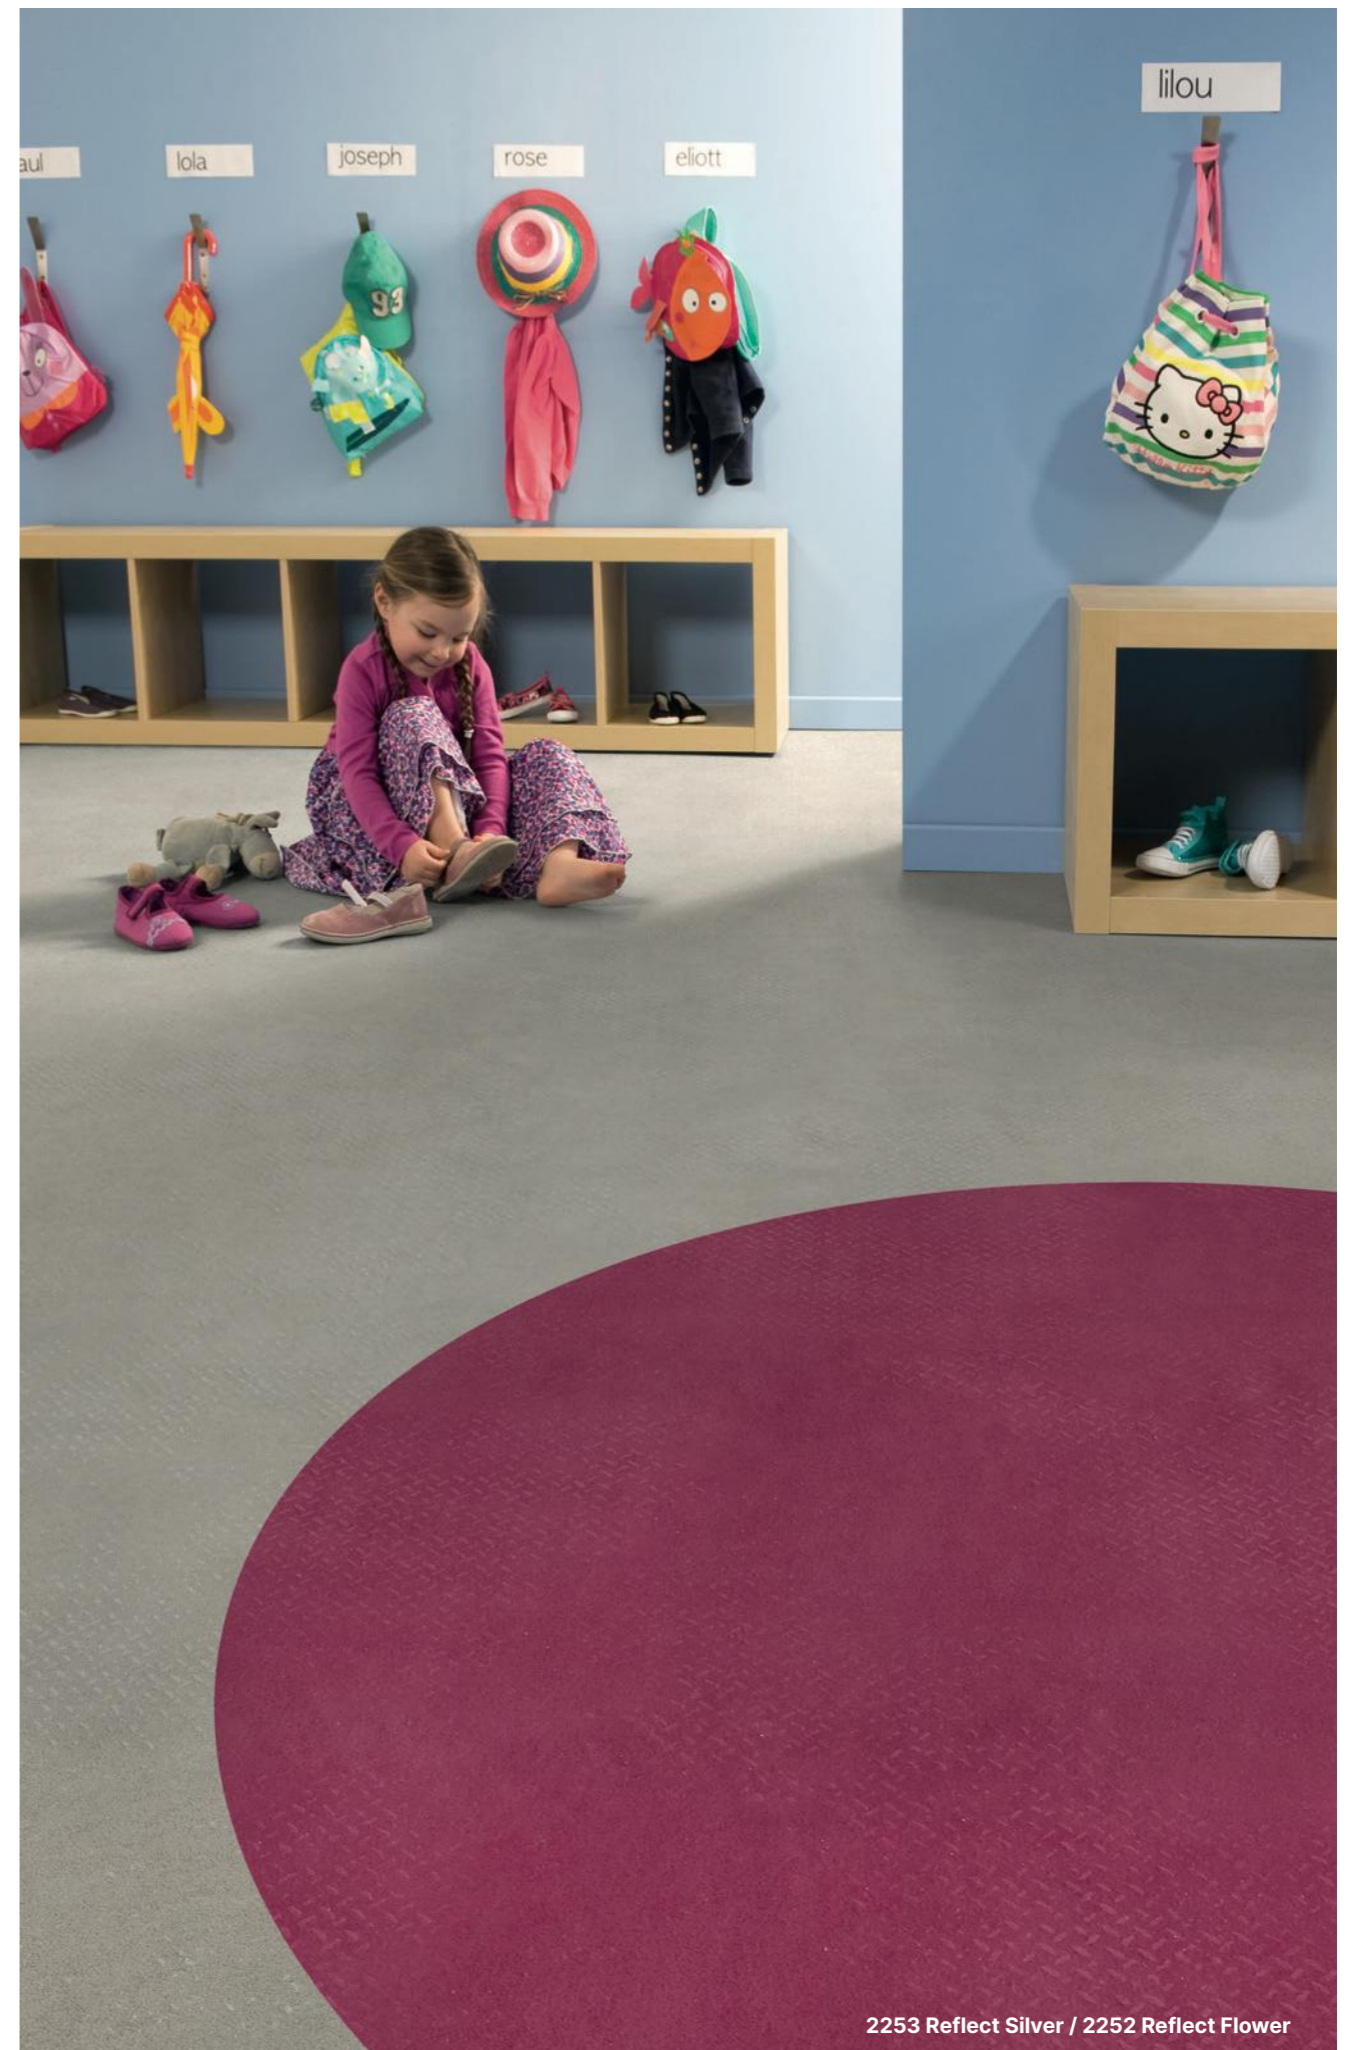

2253 Reflect Silver / 2252 Reflect Flower

Nerok Multilayered Vinyl Flooring

NEW RANGE

Nerok Compact is a multilayered vinyl floor covering available in 2m and 4m wide sheet, with a group T wear rating. The product comprises a compacted backing reinforced with a glass fibre veil and a printed design that is protected by a transparent wearlayer.

It offers a -6 dB sound insulation and a resistance to indentation of 0.05 mm. This flooring is protected by the surface treatment, PUR+ mat, ensuring easy maintenance and no required polish for the entire lifetime of the product. It does not contain any heavy metals or CMR 1&2 components, 100% compliant with REACH. The product emission rate of volatile organic compounds is <math><100\mu\text{g}/\text{m}^3</math> (TVOC after 28 days ISO 16000-6). It is 100% recyclable.

Nerok Acoustic is a multilayered vinyl floor covering available in 2m and 4m wide sheet, with a group T wear rating. The product comprises a foam backing reinforced with a glass fibre veil and a printed design that is protected by a transparent wearlayer. It offers a -19 dB sound insulation and a resistance to indentation of 0.10mm.

This flooring is protected by the surface treatment, PUR+ mat, ensuring easy maintenance and no required polish for the entire lifetime of the product. It does not contain any heavy metals or CMR 1&2 components, 100% compliant with REACH. The product emission rate of volatile organic compounds is <math><100\mu\text{g}/\text{m}^3</math> (TVOC after 28 days ISO 16000-6). It is 100% recyclable.



1893 Harbor Blue



Description	Nerok 55		Nerok 70			
	Compact	Acoustic Comfort	Compact	Acoustic Comfort		
Thickness	EN ISO 24346	mm	2.00	3.35	2.00	3.45
Wear layer thickness	EN ISO 24340	mm	0.55	0.55	0.70	0.70
Weight	EN ISO 23997	g/m ²	2560	2400	2670	2500
Width of sheet	EN ISO 24341	cm	200 / 400	200 / 400	200 / 400	200 / 400
Length of sheet	EN ISO 24341	lm	20	20	20	20
Classification						
Norm / Product specification	-	-	EN ISO 10582	EN 651	EN ISO 10582	EN 651
European classification	EN ISO 10874	class	33 - 42	33 - 42	34 - 43	34 - 42
Impact sound insulation	EN ISO 717-2	dB	6	19	6	19
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip resistance	DIN 51130	class	R10	R10	R10	R10
Performances						
Wear resistance	EN 660.2	mm ³	≤ 2.0	< 2.0	≤ 2.0	< 2.0
Wear group	QB 30	group	T	T	T	T
Type binder content	EN ISO 10582	type	I	-	I	-
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.40	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20	≤ 0.10	≤ 0.20
Residual indentation (measured value)	-	mm	0.05	0.10	0.05	0.10
Castor chair test (type H)	ISO 4918	-	OK	OK	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	OK
Surface treatment	-	-	PUR+	PUR+	PUR+	PUR+
Environment / Indoor Air Quality						
TVOC after 28 days	ISO 16000-6	µg/m ³	< 100	< 100	< 100	< 100
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®
CE Marking						
CE	EN 14041					


Nerok

Multilayered Vinyl Flooring

NEW RANGE

- > **Nerok 55 Compact** 0.55mm wear layer. Tough and durable, suitable for normal traffic areas
- > **Nerok 55 Acoustic Comfort** 0.55mm wear layer. Excellent sound insulation properties (19dB)
- > **Nerok 70 Compact** 0.7mm wear layer. Tough and durable, suitable for high traffic areas
- > **Nerok 70 Acoustic Comfort** 0.7mm wear layer. Excellent sound insulation properties (19dB)

Wood

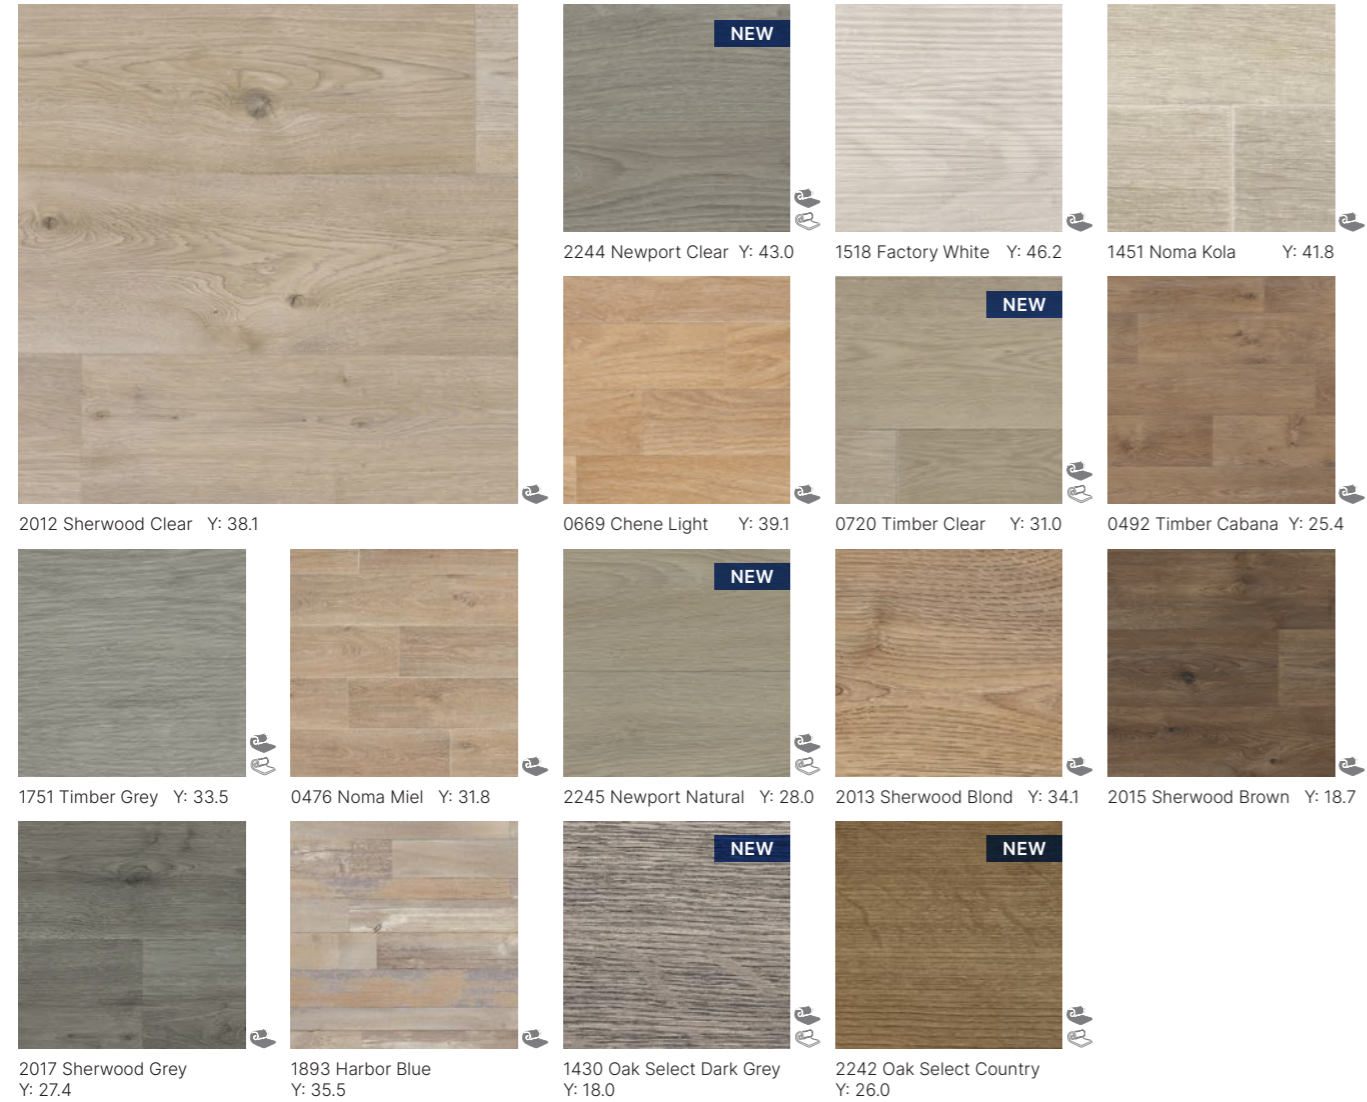

0.55mm Wear Layer	0.7mm Wear Layer	T Wear Group	R10 Slip Resistant	19dB Quiet Underfoot Comfort
Compact	Comfort	PUR+	100% Recyclable	Y = Light Reflectance Value (LRV) Weld Rods see page 200



2012 Sherwood Clear

Nerok

Multilayered Vinyl Flooring


NEW RANGE

- > **Nerok 55 Compact** 0.55mm wear layer. Tough and durable, suitable for normal traffic areas
- > **Nerok 55 Acoustic Comfort** 0.55mm wear layer. Excellent sound insulation properties (19dB)
- > **Nerok 70 Compact** 0.7mm wear layer. Tough and durable, suitable for high traffic areas
- > **Nerok 70 Acoustic Comfort** 0.7mm wear layer. Excellent sound insulation properties (19dB)

Concrete



Pixel

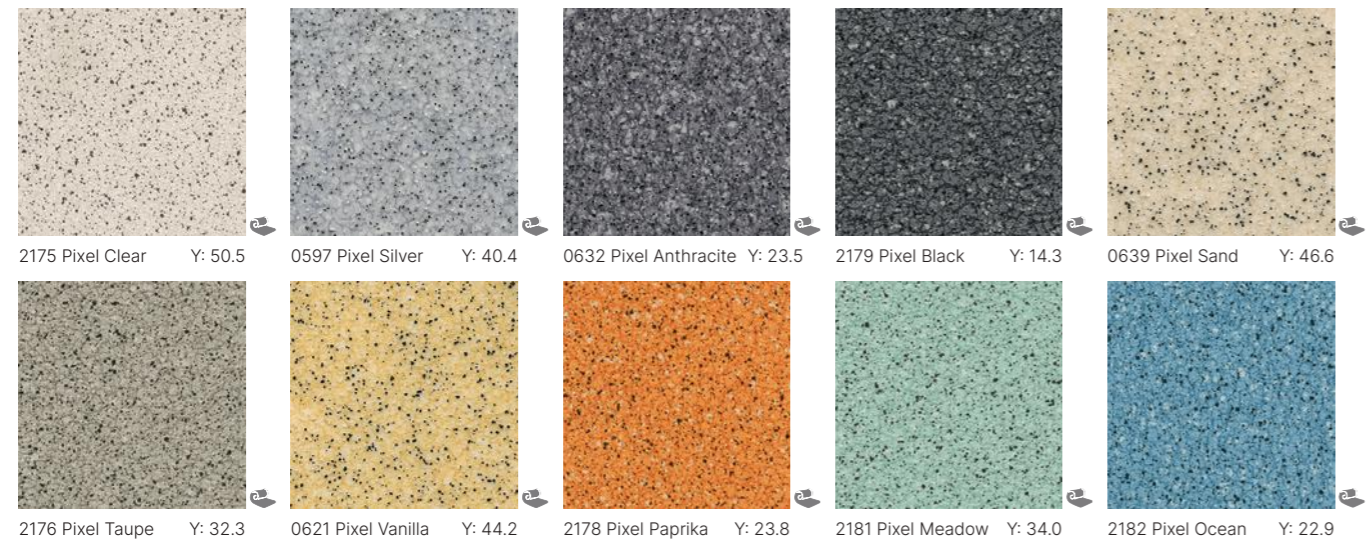

0.55mm Wear Layer	0.7mm Wear Layer	T Wear Group	R10 Slip Resistant	19dB Quiet Underfoot Comfort
Compact	Comfort	PUR+	100% Recyclable	Y = Light Reflectance Value (LRV) Weld Rods see page 200



2151 Shade Light Grey

Taraflex® Comfort

Vinyl Sports Flooring

- > Offers the highest comfort and shock absorption to prevent long-term injuries and immediate injuries upon impact
- > The first Taraflex® sports floor in the P3 category (complies with EN Standard 14904) ≥45% of shock absorption
- > Triple action ProtecSol® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > Suitable for all levels and all sports
- > Modern and ultra-realistic wood design range, with new maple wood designs produced using actual scans of our world class Connor maple hardwood flooring



Comfort |
 ProtecSol® |
 P3 |
 12.5mm Thickness |
 Y = Light Reflectance Value (LRV) |
 Weld Rods see page 201



6381 Maple Design / 2404 London Light Blue

Taraflex® Performance

Vinyl Sports Flooring

- > Taraflex® Performance is ideal for a variety of applications including all kinds of sports and leisure activities
- > P2 category sports flooring (complies with EN Standard 14904) 35 to 45% of shock absorption
- > Triple action ProtecSol® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > The best compromise for comfort and safety
- > Modern and ultra-realistic wood design range, with new maple wood designs produced using actual scans of our world class Connor maple hardwood flooring



6758 Silver Gray / 2404 London Light Blue

Taraflex® Evolution

Vinyl Sports Flooring

- > P1 category (complies with EN Standard 14904) 25 to 35% of shock absorption
- > Triple action ProtecSol® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > Suitable for all types of sports and leisure activities
- > Modern and ultra-realistic wood design range, with new maple wood designs produced using actual scans of our world class Connor maple hardwood flooring



Y = Light Reflectance Value (LRV) | Weld Rods see page 201




6381 Maple Design

Taraflex® Multi-use

Vinyl Sports Flooring

- > A real sports floor in the P1 category (complies with EN Standard 14904) 25 to 35% of shock absorption
- > Triple action ProtecSol® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > Suitable for all types of sports and leisure activities
- > Excellent indentation resistance and recovery from tables and chairs
- > Modern and ultra-realistic wood design range, with new maple wood designs produced using actual scans of our world class Connor maple hardwood flooring

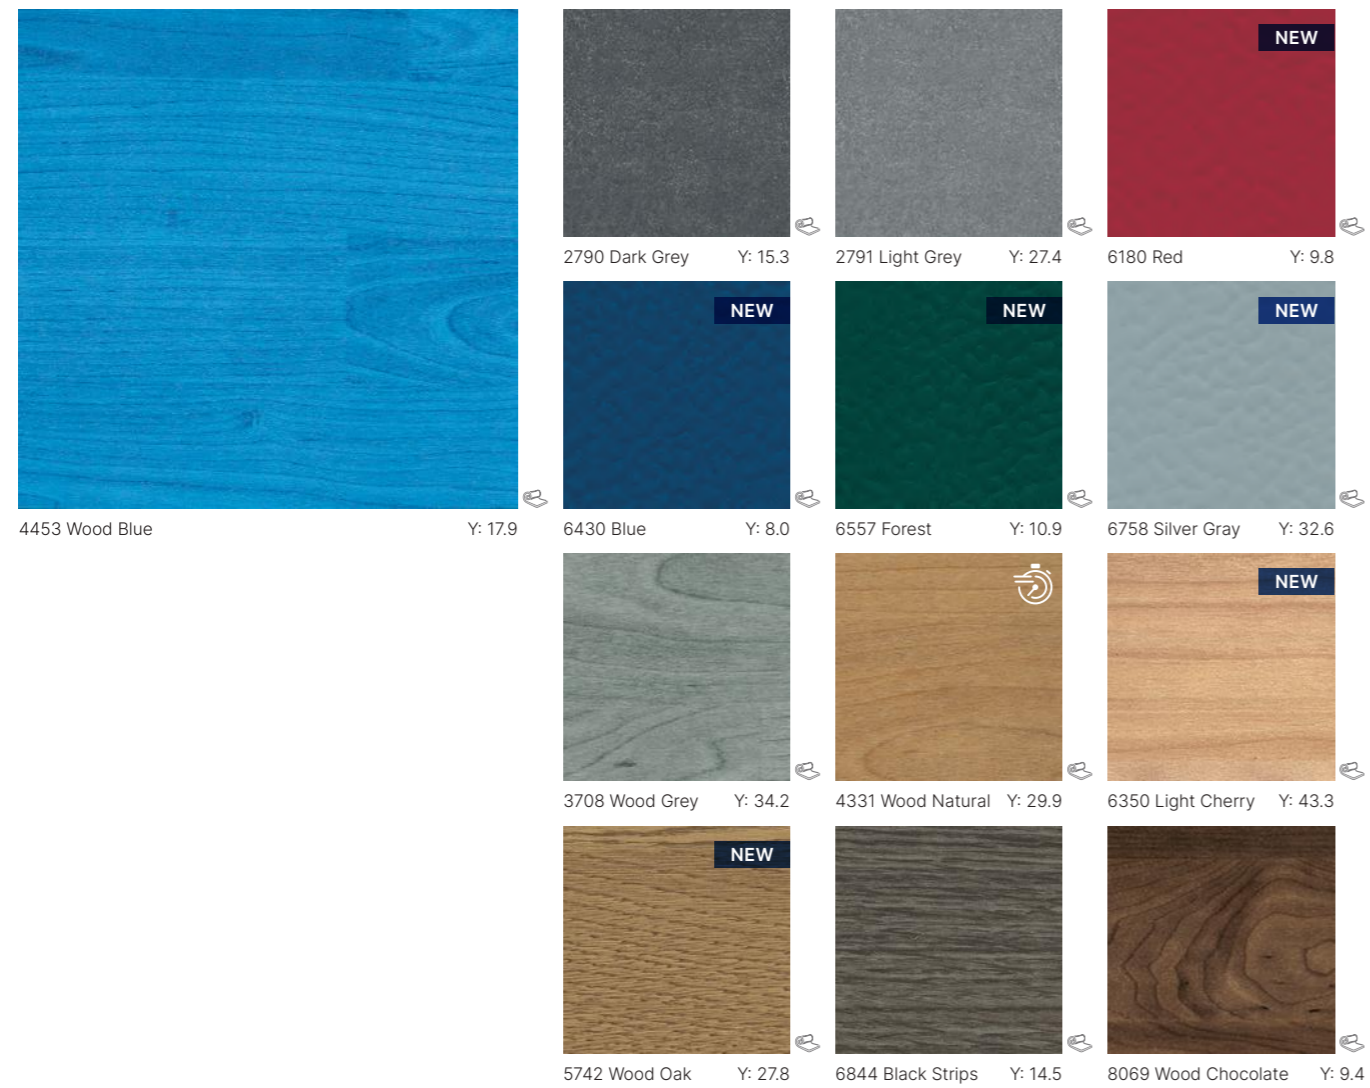

Y = Light Reflectance Value (LRV) | Weld Rods see page 201




3708 Wood Grey / 4453 Wood Blue

Taraflex® Recreation

Vinyl Sports Flooring

- > P1 category (complies with EN Standard 14904) 25 to 35% of shock absorption
- > PUR Protect® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > Suitable for light leisure and sporting activities

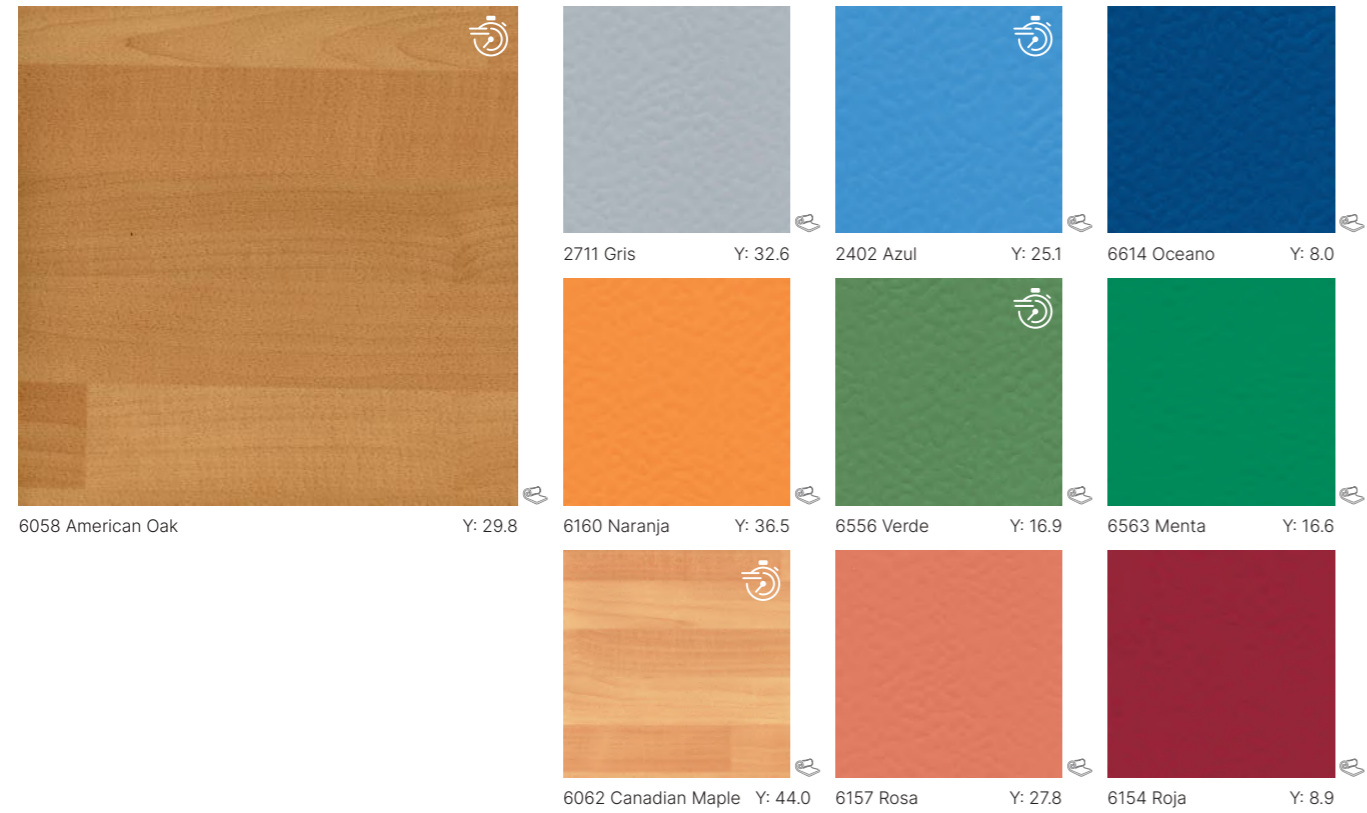

Y = Light Reflectance Value (LRV) | Weld Rods see page 201







6058 American Oak


Taraflex® Surface

Vinyl Sports Flooring

- > Ideal for rolling sports and heavy duty multipurpose usage
- > Triple action ProtecSol® for easy maintenance, friction protection and 'intelligent' sliding coefficient
- > Modern and ultra-realistic wood design range, with new maple wood designs produced using actual scans of our world class Connor maple hardwood flooring




ProtecSol®

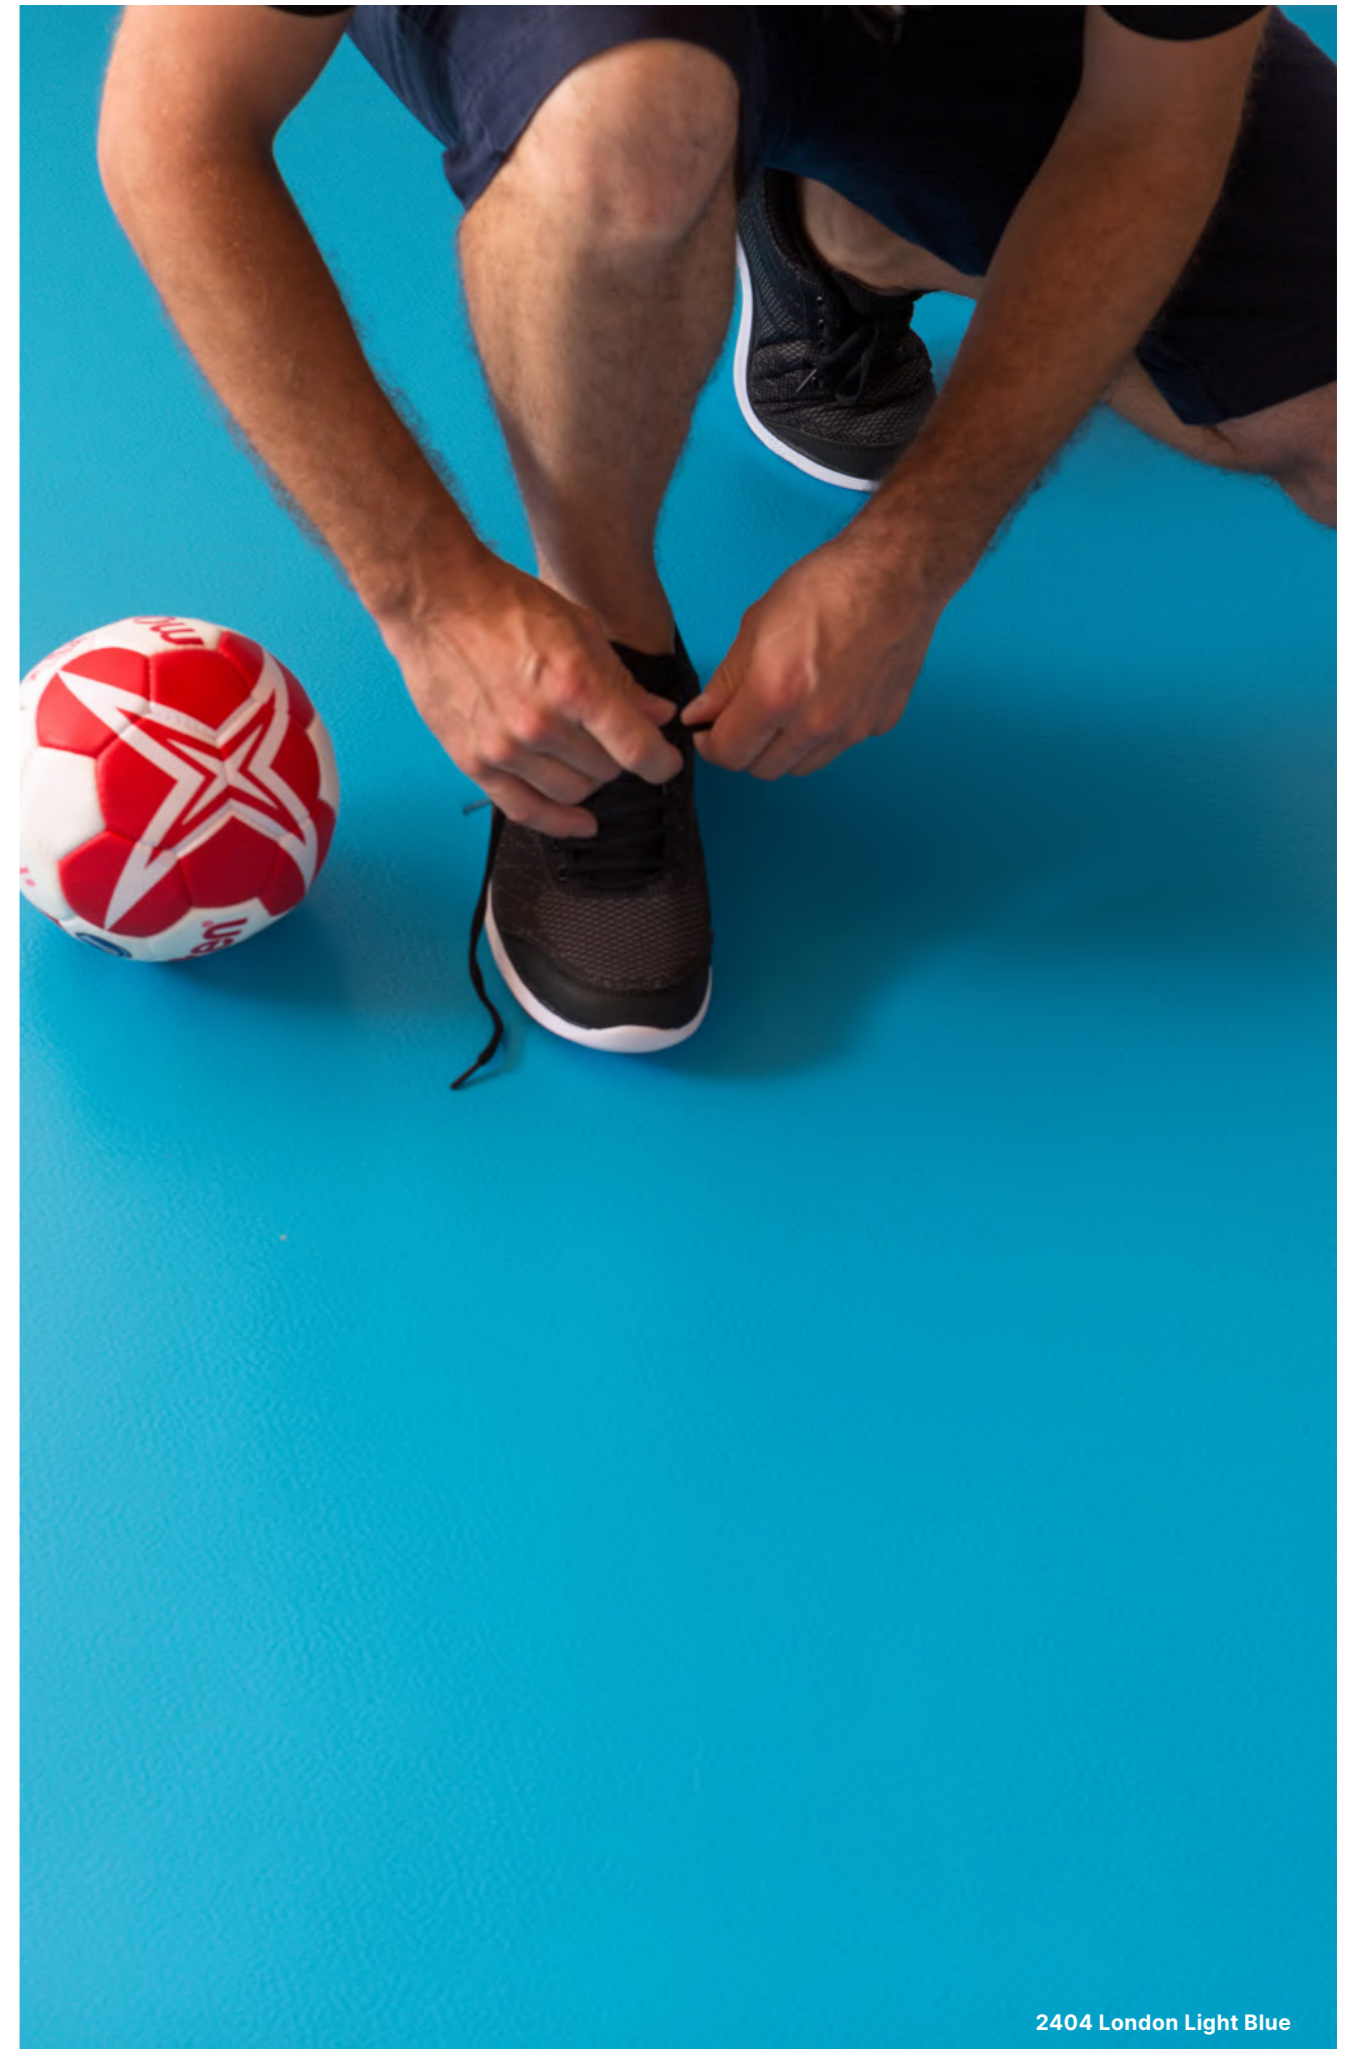2.0mm Thickness
 
Y = Light Reflectance Value (LRV)

Weld Rods see page 201



2404 London Light Blue

Personalise your sports floor using the digital printing process

- > Change colour - recolour the standard design of your choice
- > Choose from collection - choose one of our designs (examples shown below)
- > Customise - create your own design

Available with all Taraflex floors

More designs available, visit our website: mytaraflex.gerflor.com

Minimum Order Quantity: 240m² / special price / each request subject to individual study *


* Contact your local sales representative for more details.

URBAN

Factory style with brut colours and sobre designs



Pure Concrete



Pure Concrete Dark




Spatulate Concrete




Pure Concrete Taupe

FUN

An explosion of colours and designs



Polished Concrete Lagoon




Polished Concrete Blue



Blue Clay



Green Clay



Spring Grass



Blue Wave




Golden Clay



Polished Concrete Golden



Terracotta Clay

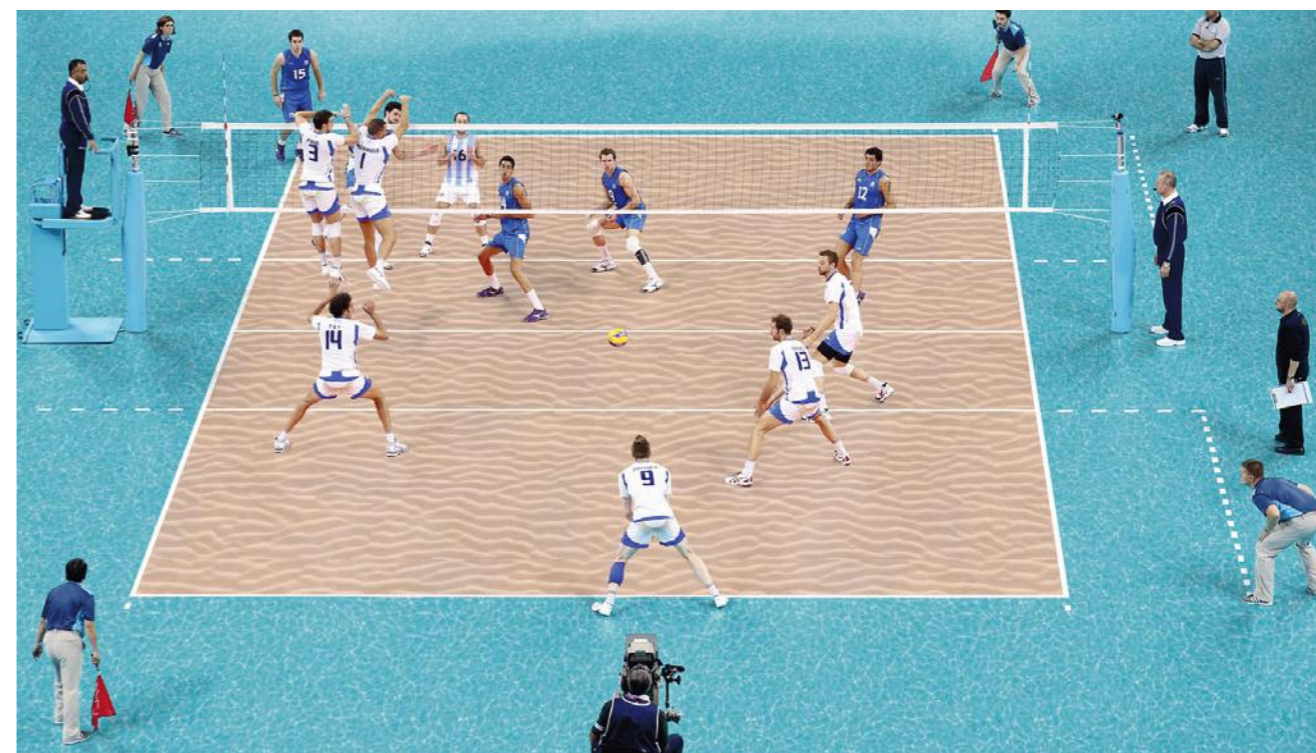

RETRONAUTE


A modern atmosphere with distinct character



Light Herringbone



Natural Herringbone



Golden Herringbone




Carrare Marble



Slate Rock

NATURELAND

Return to basics and simplicity with natural designs



White Sand



Seaside Sand



Golden Sand



Wood Crosscut



Cork

Modulock

Beech Hardwood Sports Flooring

NEW RANGE



Connor Sports® is the US market leader in hardwood sports surfacing. Introducing Modulock - a floating sports floor system with a high stability and durability over time thanks to its quality dried beech, to the 8 battens and locking points per panels and to its Bfls,s1 certification.

Our **Modulock** floor offers an amazing balance between shock absorption and ball rebound, providing an optimal playability and injury prevention.

The light weight of the panels and the interlocking system enable a fast and easy installation, but also a fast and easy removal, which makes Modulock a perfect solution for events in arenas or repeated installations in sport halls. The system offers enough durability to be also installed as a permanent installation.

Modulock panels provide a perfect assembly quality and finishes that allow an excellent installation. Our wide accessory offer completes Modulock solution with aluminium edges, access ramps, reservations and storage racks.



Connor Sports® Solid Beech

			Modulock
Description			
Finish flooring	-	-	Pre-varnished panels of finger-jointed solid beech
Panel size	-	mm	2380 × 665
Thickness of strips	-	mm	22
Total thickness	EN 428	mm	55
Weight	EN 430	kg/m ²	17
Sport Properties			
Shock absorption	EN 14808	%	≥ 55 (A4)
Vertical deformation	EN 14809	mm	< 5 (A4)
Sliding coefficient	EN 13036-4	BPN	80-110
Ball bounce	EN 12235	%	≥ 93
Technical Characteristics			
Abrasion resistance	EN ISO 5470-1	g	0.07
Indentation resistance	EN 1516	mm	0.04
Resistance to rolling load	EN 1516	mm	< 0.5
Gloss value	EN ISO 2813	%	< 45
Classification			
Fire resistance	EN 13501-1	class	Bfl-s1
Formaldehydes emission	EN 717	class	E1
CE Marking			
			Fire, Shock Absorption, Sliding Coefficient, Abrasion Resistance, Resistance to rolling load, Resistance to fire, Resistance to wear

Hardwood systems for professional teams

More than half of the teams in the NBA have purchased a Connor Sports® hardwood system:





Outdoor Sports Flooring



Sport Court® Power Game™ Plus modular outdoor sport surfaces are designed for multi-use and are ideal for athletes participating in sport at any level, either professionally or within education and community settings. Build a new court, renovate an existing space, or set up portable courts for a tournament or event.


Designed to overlay outdated concrete or asphalt surfaces, Sport Court® rapidly transforms them into colourful play surfaces that keep athletes safe, allow for year-round sports activity and eliminates costly annual maintenance.

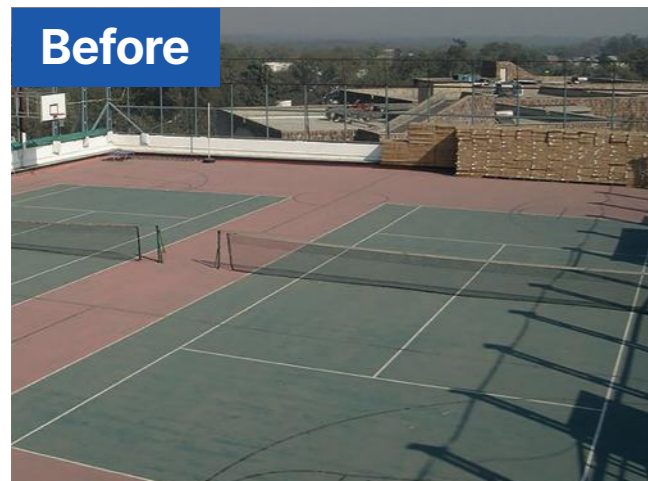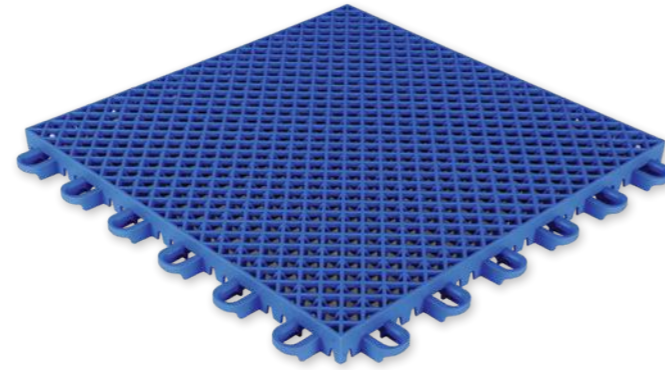

Sport Court® Power Game™ Plus				
Description				
Product	-	-	-	Outdoor Interlocking Tile
Dimensions	-	mm	-	305 × 305
Thickness	-	mm	-	19
Weight	-	g	-	355
Type of installation	-	-	-	Looselay / Possible anchoring
Packaging	-	Box	-	40 tiles per box = 3.72 sqm
Product code	-	-	-	S351
Technical Properties	Method	Unit	Requirements	Results
Friction	EN 13036-4	-	80-110	80-110
Shock absorption	EN 14808	%	≥ 11%	≥ 11%
Vertical rebound	EN 12235	%	≥ 85	100
Permeability	EN 12616	mm/h	≥ 150	> 360
Lock strength	-	N	-	1050
Colour change	EN ISO 20105-A02	-	≥ 3	≥ 3

Sport Court® Power Game™ Plus Outdoor Sports Flooring



- > Multi-use outdoor flooring, ideal for athletes and the community
- > Keep users safe with the lowest skin abrasion of any outdoor surface
- > Designed to overlay concrete or asphalt
- > New Grid Pattern for better water drainage and faster drying times
- > Enhanced locking system for assured stability and safety

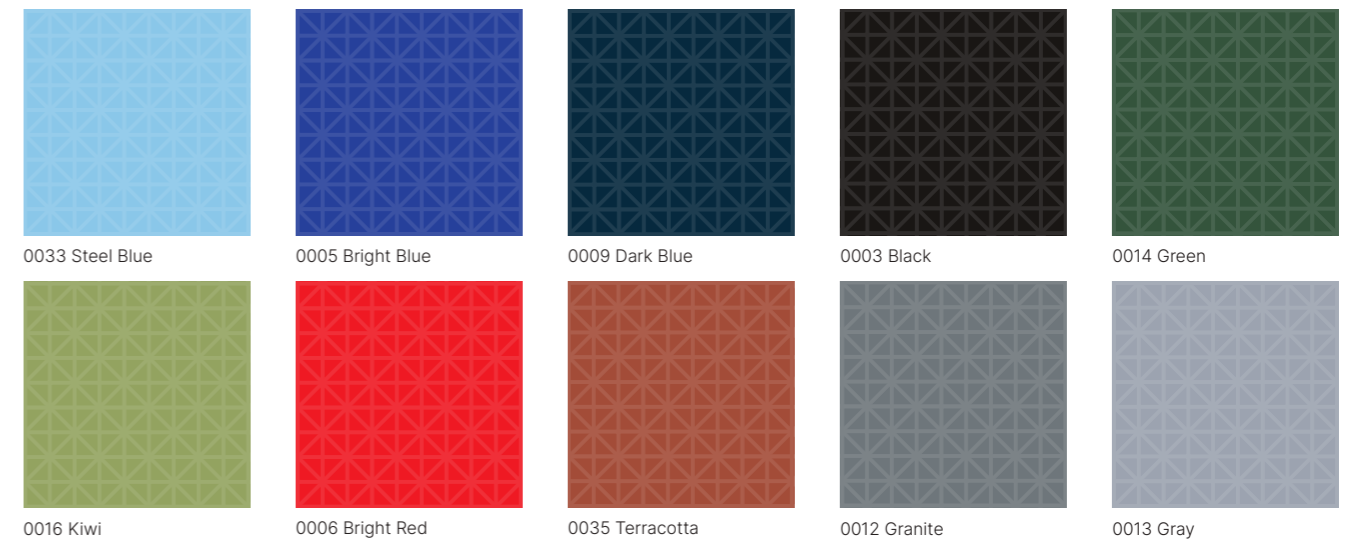

Product Construction

Hard courts increase injury risk for athletes

Sport Court® surfaces provide optimal comfort and protect athletes from overuse and stress injuries as well as reduce the likelihood of concussion and stress fractures.

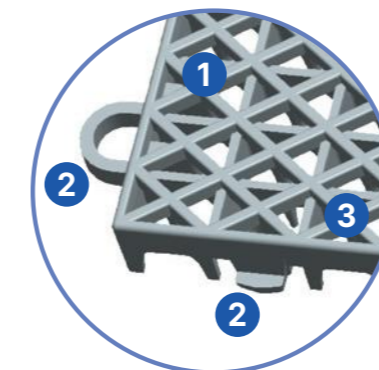
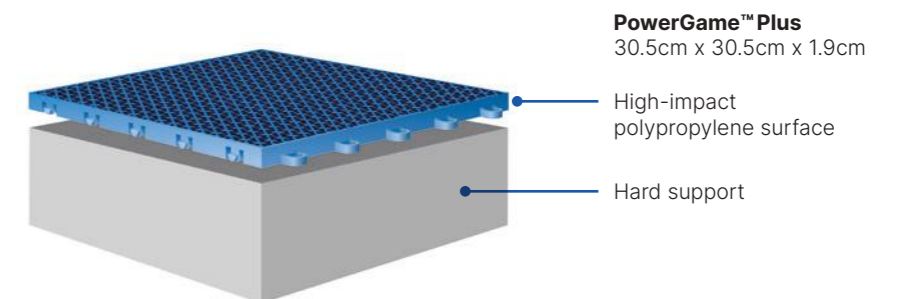


1. **Double-tier** for increased shock absorption
2. **Patented interlocking system** designed to support the movements of athletes and reduce the risk of injury
3. **UV stabilisers** maximise colour-fastness
4. **Backing** designed to promote drainage



Rubber Gym Flooring

There are flooring types that can resist the beating of the free-weight and weight lifting areas. There are floors that look great. There are floors that are made in formats that make them quick to install, interchangeable and replaceable. There are floors that are easy to maintain. Take a look at our Powershock range – high impact rubber solutions for Fitness, designed to be both functional and hardwearing.

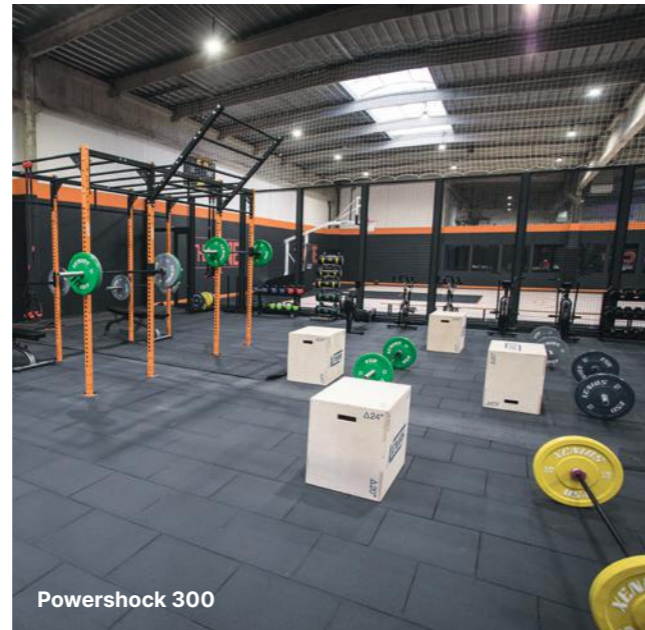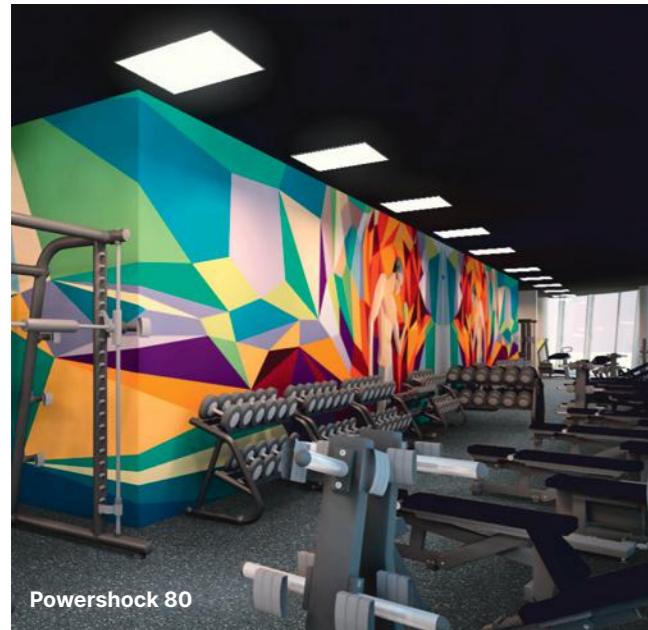


					Powershock	
					80	300
					Cardio & Free-Weight Zone	Crossfit & Heavy-Weight Area
Description						
Size	NF EN ISO 24342	mm	980 × 980	500 × 500		
Thickness	NF EN ISO 24346	mm	8	30		
Weight	NF EN ISO 23997	kg/tile	11.9	6.8		
Classification						
Fire resistance	EN 13501-1	class	Bfl-s1	Cfl-s1		
VOC	ISO 16000-6	class	A+	A+		
Performances						
Dimensional stability	NF EN ISO 23999	%	< 0.3	< 0.1		
Abrasion	EN ISO 5470-1	g	< 0.5	1.5		
Light resistance	EN ISO 20105 - B02	level	4	3		
Indentation resistance	EN 1516	mm	< 0.1	0.12		
Slip resistance in dry conditions	EN 13036-4	unit	80-110	104		
Sound insulation	EN ISO 717/2	dB	13	24		
Hardness shore A	Int.	-	> 75	60		

Powershock Rubber Gym Flooring


- > Shock absorbing
- > Durable
- > Easy to clean and maintain

Powershock 80 Cardio & Free-Weight Zone


- > Vulcanised rubber is a chemical process through high pressure and temperature enables the sulfur atoms to form links and bridges between long chains of rubber molecules. This increases the overall strength and durability of the rubber
- > Highly resistant to static loads and to dumbbells thanks to the vulcanisation process of this 8mm vulcanized rubber
- > Highly durable
- > Easy to clean and maintain



Black



Dark Grey

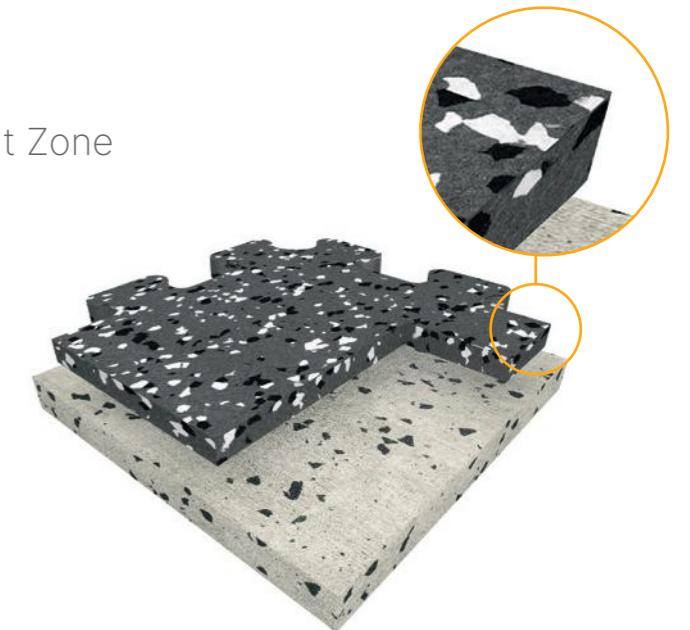


Powershock 300 Crossfit & Heavy-weight Area

- > Made from vulcanised rubber, a chemical process that cures and combines rubber and sulphur. Through high pressure and temperature the sulphur atoms form links and bridges between long chains of rubber molecules. This increases the overall strength and durability of the rubber
- > 30 mm high impact rubber
- > Tiles with pre-installed connector pins for ease of installation
- > Powershock 300 avoids deep-impact damage while providing outstanding sound deadening, as well as:
 - Shock absorption
 - Sound insulation 26 dB
 - Protection of subfloor



0001 Dark Grey

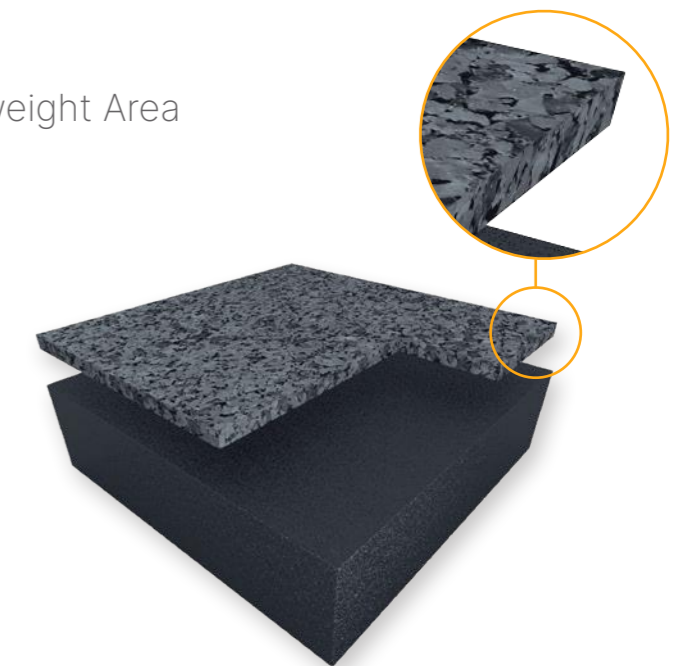

Sports Undercarriage System

NEW RANGE

Designed for multi-use leisure activities our low profile area elastic sports floors have no surface irregularities and preform through their anticipated life, consistently achieving EN 14904.

Ideal for renovation and new build projects floors consist of an area elastic undercarriage system made up of an impervious damp proof membrane, 12mm foam base and 12mm plywood topped with a vinyl or linoleum top surface.



Description	Standard	Units	Area Elastic AE Low Profile	Taraflex®		
				Combisport Low Profile	AE85 with Taraflex® Surface	Combisport 85 with Taraflex® Evolution
Surface treatment	-	-	Dependant on chosen vinyl or linoleum covering	Triple-Action ProtecSol®	Triple-Action ProtecSol®	Triple-Action ProtecSol®
Multilayer surface	-	-		D-Max™	D-Max™	D-Max™
Foam Backing	-	-		CXP HD	-	CXP HD
Typical total system height	EN 428	mm	24mm profile (22mm system + 2mm TX surface)	29.5mm profile (22mm system + 7.5mm TX Evolution)	Adjustable 83-92 (81-90mm profile + 2mm TX surface)	Adjustable 88.5-97.5 (81-90mm profile + 7.5mm TX Evolution)
Weight of panels	EN 430	Kg/m²	15.9	17.7	21	21
Length of panels	EN 426	lm	2.4	2.4	2.4	2.4
Width of panels	EN 426	lm	1.2	1.2	0.6	0.6

Area Elastic Sprung Floor


Sports Undercarriage System

- > Ideal for low profile / renovation and new build projects
- > EN 14904 complaint: category A3 with <45% force reduction

NEW

Area Elastic AE Low Profile


- ① Vinyl or linoleum covering
- ② 12mm plywood with 10mm tongue
- ③ 12mm (80kg/m3 density) foam
- ④ Impervious damp proof membrane

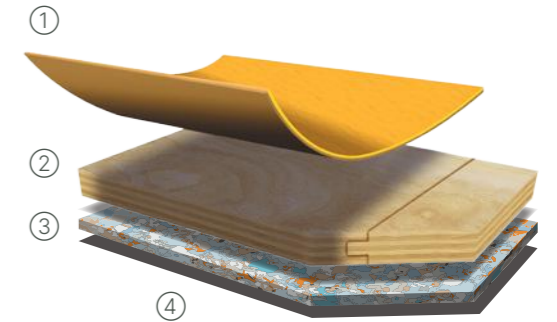

Other undercarriage based solutions:

Taraflex® Combisport Low Profile

- > Ideal for installations requiring a low profile / renovation projects
- > For more information call 01625 428922

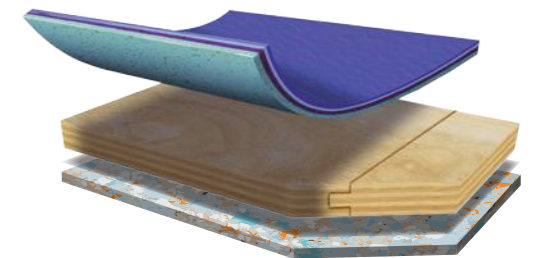


Taraflex® AE 85

- > Adjustable height for uneven subfloors
- > EN 14904 complaint: category A4 with <55% force reduction
- > For more information call 01625 428922



Taraflex® Combisport 85

- > Ideal for installations with uneven subfloors – system adjustable up to 9mm
- > For more information call 01625 428922

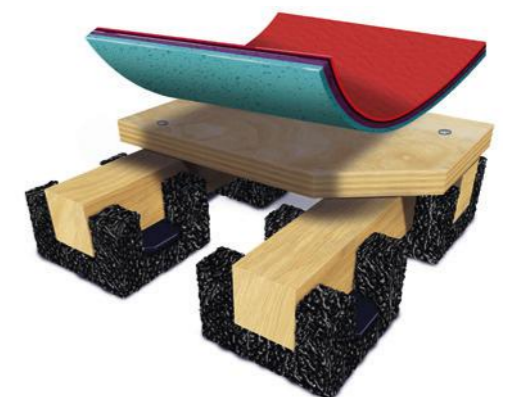

Creation 70 Luxury Vinyl Tiles & Planks (LVT)

Creation 70 Clic is a Luxury Vinyl Tile and Plank system, with clever innovative interlocking technology that makes it fast to install, requires no adhesives and provides a range of inspiring finishes for any interior space.

You can save time and money as it is a fast track, loose lay, clean & dry installation. There is no need to close down the premises as the products can be installed with minimum disruption and over existing floor finishes or imperfect sub floors. It is waterproof as it resists leaks and spillages that can damage wood based products.

Creation 70 Clic is extremely tough and durable and ideal for high traffic environments including retail, hospitality, healthcare, education as well as many other markets.

Creation 70 Looselay is a looselay flooring collection adapted for high traffic applications. Fast and easy to install and ready to use out of the box, it is easily removable without leaving messy adhesive residue. Looselay up to 30sqm

Creation 70 Dryback range is a popular choice for both public and commercial areas that are designed for high traffic wear including retail, hotels, hospitality, as well as many other market sectors. Creation 70 Dryback range offers brand new wood, stone and mineral effect designs. Available in 62 designs and in 9 different sizes with many designs having bevelled edges and embossed finishes for added realism.




Creation 70 is available in Clic, Looselay and Dryback variations

1068 Etna Beige



			Creation 70		
			Clic	Looselay	Dryback
Description					
Thickness	EN ISO 24346	mm	6.0	6.0	2.5
Wear layer thickness	EN ISO 24340	mm	0.70	0.70	0.70
Weight	EN ISO 23997	g/m ²	9850	10000	3960 - 4100
Size	EN ISO 24342	mm	Planks: 214 × 1239 242 × 1461 Tile: 391 × 729	Plank: 229 × 1220 Tiles: 600 × 600 914 × 914	Planks: 184 × 1219, 230 × 1500, 208 × 1243, 228 × 914 Mixed planks: 76/152/228 × 914 Tiles: 610 × 610, 914 × 914, 457 × 914 Mixed tiles: 152/305/457 × 914
Classification					
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582	EN ISO 10582
European classification	EN ISO 10874	class	34 -43	34 -43	34 -43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance wet	DIN 51130	class	R10	R10	R10
Performances					
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	-	group	T	T	T
Type binder content	ISO 10582/10581(1)	type	I	I	I
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15	≤ 0.15	≤ 0.25
Dimensional stability (measured value)	-	%	≤ 0.5	≤ 0.5	≤ 0.10
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6	≥ 6
Impact sound insulation	EN ISO 717-2	dB	4	9	4
Chemical products resistance	EN ISO 26987	-	OK	OK	OK
Surface treatment	-	-	PUR+ Matt	PUR+ Matt	PUR+ Matt
TVOC after 28 days	ISO 16000-6	µg/m ³	< 10	< 10	< 10
CE Marking					
CE	EN 14041				

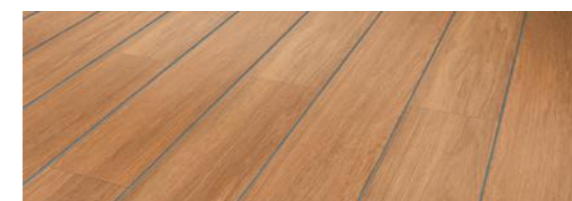


Matching decorative strips are available for all Creation 70 collections

Creation 70

Luxury Vinyl Tiles & Planks (LVT)

- > **Creation 70 Clic** interlocking planks that can be laid without adhesive
- > **Creation 70 Looselay** Looselay up to 30sqm, removable installation with tackifier above 30sqm
- > **Creation 70 Dryback** is a glued floorcovering
- > Suitable for high traffic use in public and commercial areas
- > Low maintenance due to Polyurethane (PUR+) surface treatment

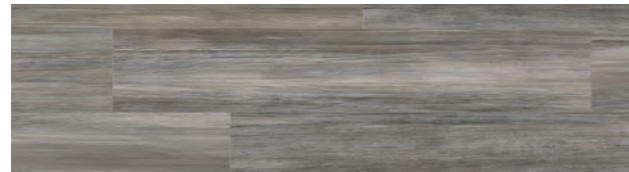

1051 Muse Smoked
DB 208 × 1243mm | CLIC 214 × 1239mm

Y: 21.3



1052 Muse Sand
DB 208 × 1243mm | CLIC 214 × 1239mm

Y: 39.4



0545 Serena
DB 208 × 1243mm | CLIC 214 × 1239mm

Y: 16.7



0577 Albion
DB 208 × 1243mm | CLIC 214 × 1239mm

Y: 21.8



0357 Portobello
DB 208 × 1243mm | CLIC 214 × 1239mm | LL 229 × 1220mm

Y: 25.3



0538 Midwest
DB 208 × 1243mm | CLIC 214 × 1239mm | LL 229 × 1220mm

Y: 38.9



0798 Cervino Oak Nature
DB 230 × 1500mm | CLIC 242 × 1461mm

Y: 28.3



0797 Cervino Oak Beige
DB 230 × 1500mm | CLIC 242 × 1461mm

Y: 39.4



0358 Moon Island
DB 208 × 1243mm | CLIC 214 × 1239mm | LL 229 × 1220mm

Y: 29.8



0360 Deep Forest
DB 208 × 1243mm | CLIC 214 × 1239mm

Y: 15.8



0800 Toasted Wood Roadster
DB 230 × 1500mm | CLIC 242 × 1461mm

Y: 13.6



1053 Toasted Wood Ash
DB 230 × 1500mm | CLIC 242 × 1461mm

Y: 10.6

0.7mm

Wear Layer

T Wear Group

R10 Slip Resistant



PUR+ Matt

DB

Creation 70 Dryback

CLIC

Creation 70 Clic

LL

Creation 70 Looselay

Y = Light Reflectance Value (LRV)



1051 Muse Smoked

Creation 70

Luxury Vinyl Tiles & Planks (LVT)

- > **Creation 70 Clic** interlocking planks that can be laid without adhesive
- > **Creation 70 Looselay** Looselay up to 30sqm, removable installation with tackifier above 30sqm
- > **Creation 70 Dryback** is a glued floorcovering
- > Suitable for high traffic use in public and commercial areas
- > Low maintenance due to Polyurethane (PUR+) surface treatment




0799 Toasted Wood Cafe
DB 230 × 1500mm | CLIC 242 × 1461mm

Y: 8.4




0359 Wild Oak
DB 208 × 1243mm | CLIC 214 × 1239mm

Y: 26.8

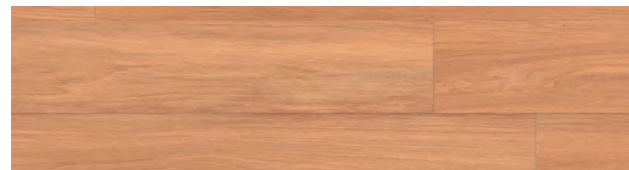


1054 Onka Honey
DB 230 × 1500mm | CLIC 242 × 1461mm | LL 229 × 1220mm

Y: 26.6

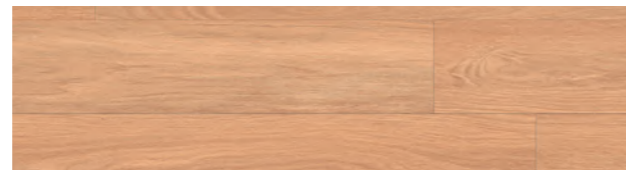

1055 Onka Natural
DB 230 × 1500mm | CLIC 242 × 1461mm

Y: 31.1

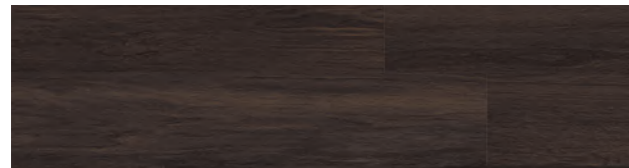

1057 Onka Coffee
DB 230 × 1500mm | CLIC 242 × 1461mm

Y: 7.0




1056 Onka Pearl
DB 230 × 1500mm | CLIC 242 × 1461mm

Y: 32.9



1049 Grace Bay Cream
DB 208 × 1243mm | CLIC 214 × 1239mm

Y: 49.1

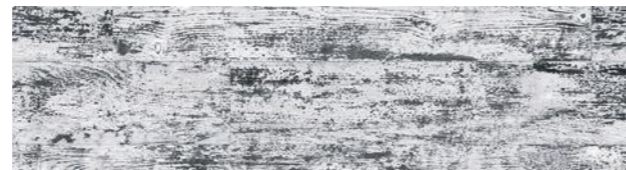


1050 Grace Bay Black
DB 208 × 1243mm | CLIC 214 × 1239mm

Y: 32.0



0356 Denim Wood
DB 208 × 1243mm | LL 229 × 1220mm

Y: 42.1

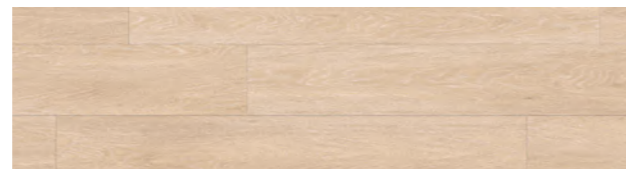

0329 Limed Oak
DB 208 × 1243mm

Y: 42.0



1074 Diesel Burnt
DB 230 × 1500mm | LL 229 × 1220mm

Y: 8.1



1075 Diesel Nala
DB 230 × 1500mm | LL 229 × 1220mm

Y: 16.7

0.7mm

Wear Layer

T Wear Group

R10 Slip Resistant



PUR+ Matt

DB
Creation 70 Dryback

CLIC
Creation 70 Clic

LL
Creation 70 Looselay

Y = Light Reflectance Value (LRV)



0799 Toasted Wood Cafe

Creation 70

Luxury Vinyl Tiles & Planks (LVT)

- > **Creation 70 Clic** interlocking planks that can be laid without adhesive
- > **Creation 70 Looselay** Looselay up to 30sqm, removable installation with tackifier above 30sqm
- > **Creation 70 Dryback** is a glued floorcovering
- > Suitable for high traffic use in public and commercial areas
- > Low maintenance due to Polyurethane (PUR+) surface treatment




0556 Clifton
DB Mix 152 × 914 mm / 76 × 914 mm / 228 × 914 mm

Y: 23.2




1192 Clifton Grey
DB 208 × 1243mm

Y: 45.7

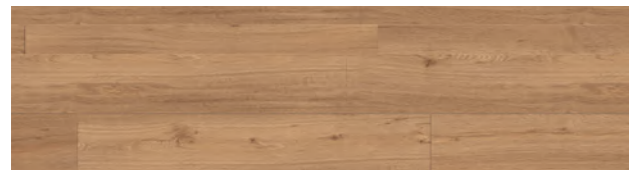

1191 Clifton Chestnut
DB Mix 152 × 914 mm / 76 × 914 mm / 228 × 914 mm

Y: 25.2

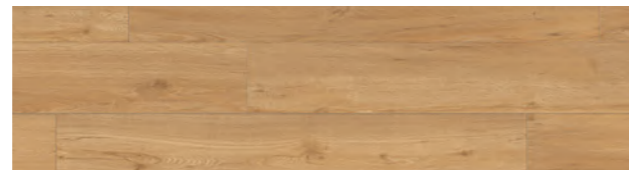

1190 Clifton Honey
DB 208 × 1243mm

Y: 24.2



0324 Silversands
DB 208 × 1243mm

Y: 33.1




0561 Carassi
DB 228 × 914mm

Y: 21.7



0535 Douglas
DB 208 × 1243mm

Y: 29.1

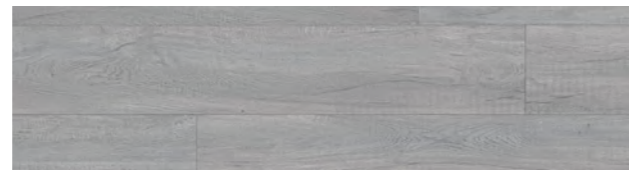


1187 Cervino Oak Cold Grey
DB 230 × 1500mm

Y: 33.8



1186 Cervino Oak Honey Clear
DB 230 × 1500mm

Y: 27.6

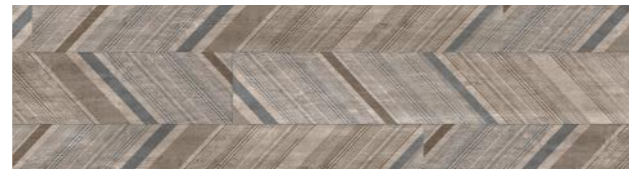

0807 Regimental Picadilly
DB 184 × 1219mm


Y: 20.6



0803 Solid Glam Picadilly
DB 184 × 1219mm

0.7mm Wear Layer | **T** Wear Group | **R10** Slip Resistant

Plank | **PUR+ Matt** | **DB** Creation 70 Dryback | **CLIC** Creation 70 Clic | **LL** Creation 70 Looselay | **Y** = Light Reflectance Value (LRV)

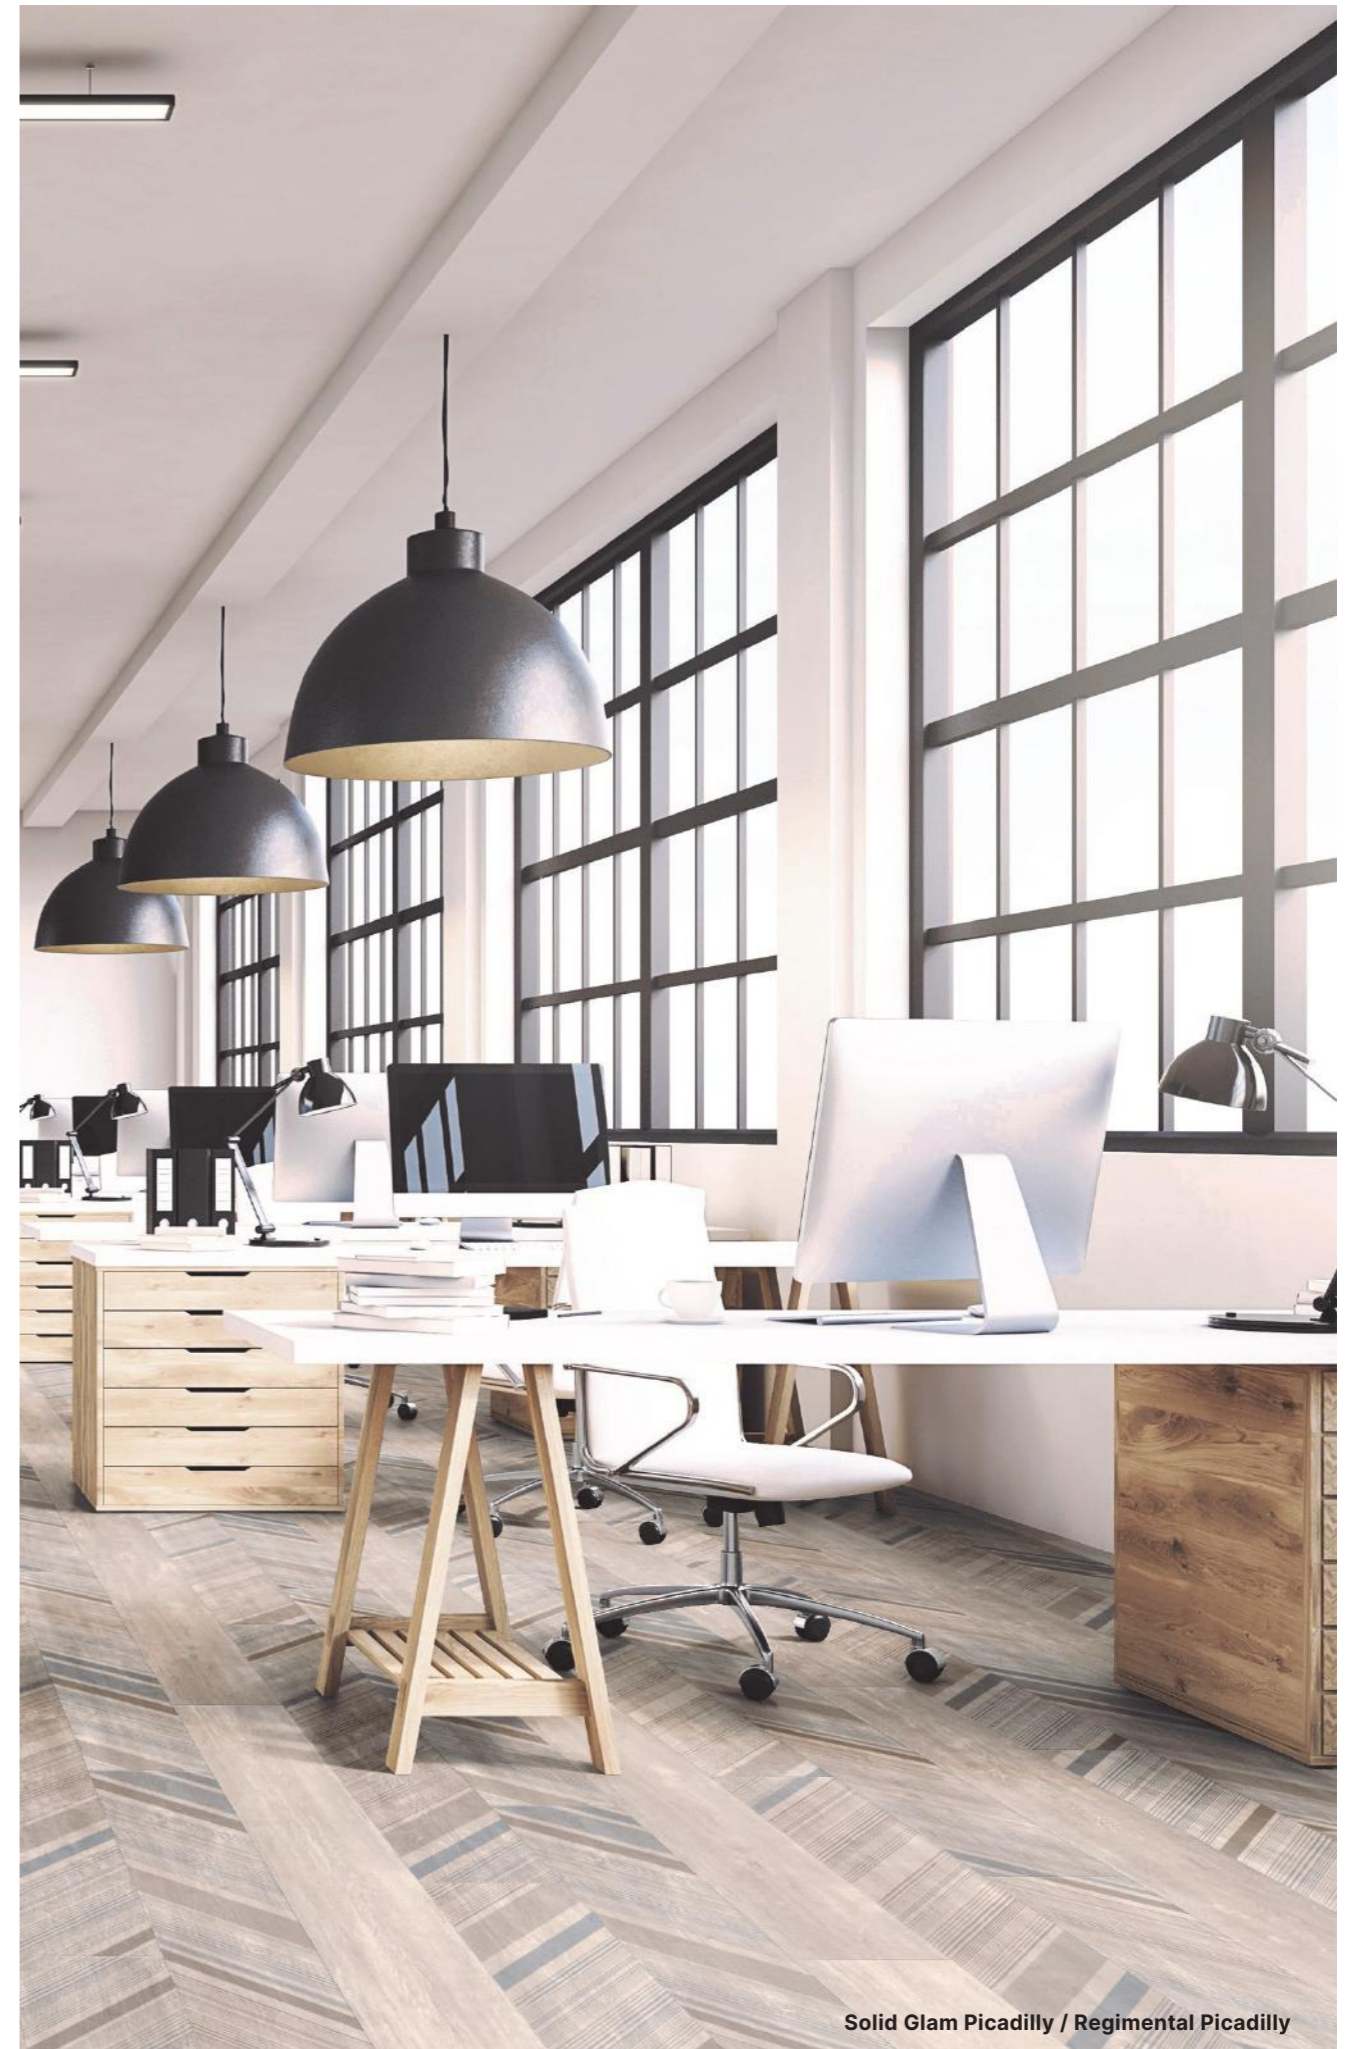

Solid Glam Picadilly / Regimental Picadilly


Creation 70

Luxury Vinyl Tiles & Planks (LVT)


- > **Creation 70 Clic** interlocking planks that can be laid without adhesive
- > **Creation 70 Looselay** Looselay up to 30sqm, removable installation with tackifier above 30sqm
- > **Creation 70 Dryback** is a glued floorcovering
- > Suitable for high traffic use in public and commercial areas
- > Low maintenance due to Polyurethane (PUR+) surface treatment




1063 Pure Concrete Beige
DB 914 × 914mm
CLIC 391 × 729mm
Y: 34.3



1061 Pure Concrete Medium
DB 914 × 914mm
CLIC 391 × 729mm
LL 914 × 914mm
Y: 28.4



1060 Pure Concrete Light
DB 914 × 914mm
CLIC 391 × 729mm
LL 914 × 914mm
Y: 39.1



1062 Pure Concrete Dark
DB 914 × 914mm
CLIC 391 × 729mm
LL 914 × 914mm
Y: 11.1



1069 Etna Dark
DB 457 × 914mm
CLIC 391 × 729mm
Y: 12.9



0088 Oxyd Pure
DB 457 × 914mm
CLIC 391 × 729mm
Y: 17.2



1068 Etna Beige
DB 457 × 914mm ** Mix
CLIC 391 × 729mm
Y: 36.6



0089 Oxyd Iron
DB 457 × 914mm
CLIC 391 × 729mm
Y: 9.4



1081 Gentleman Indigo
DB 610 × 610mm
LL 600 × 600mm
Y: 16.3



1080 Gentleman Garance
DB 610 × 610mm
LL 600 × 600mm
Y: 13.7



1082 Gentleman Peppermint
DB 610 × 610mm
LL 600 × 600mm
Y: 16.3



1083 Gentleman Taupe
DB 228 × 914mm
LL 229 × 1220mm
Y: 21.2



1076 Gentleman Tweed
DB 228 × 914mm
LL 229 × 1220mm
Y: 16.2



1058 Gentleman Grey
DB 610 × 610mm
CLIC 391 × 729mm
LL 600 × 600mm
Y: 13.8

0.7mm

Wear Layer

T Wear Group

R10 Slip Resistant

** Mix 152 × 914 mm / 305 × 914 mm / 457 × 914 mm (on demand)



Plank



Tile

PUR+ Matt

DB

Creation 70 Dryback

CLIC

Creation 70 Clic

LL

Creation 70 Looselay

Y = Light Reflectance Value (LRV)




1061 Pure Concrete Medium / 1062 Pure Concrete Dark


Creation 70

Luxury Vinyl Tiles & Planks (LVT)

- > **Creation 70 Clic** interlocking planks that can be laid without adhesive
- > **Creation 70 Looselay** Looselay up to 30sqm, removable installation with tackifier above 30sqm
- > **Creation 70 Dryback** is a glued floorcovering
- > Suitable for high traffic use in public and commercial areas
- > Low maintenance due to Polyurethane (PUR+) surface treatment

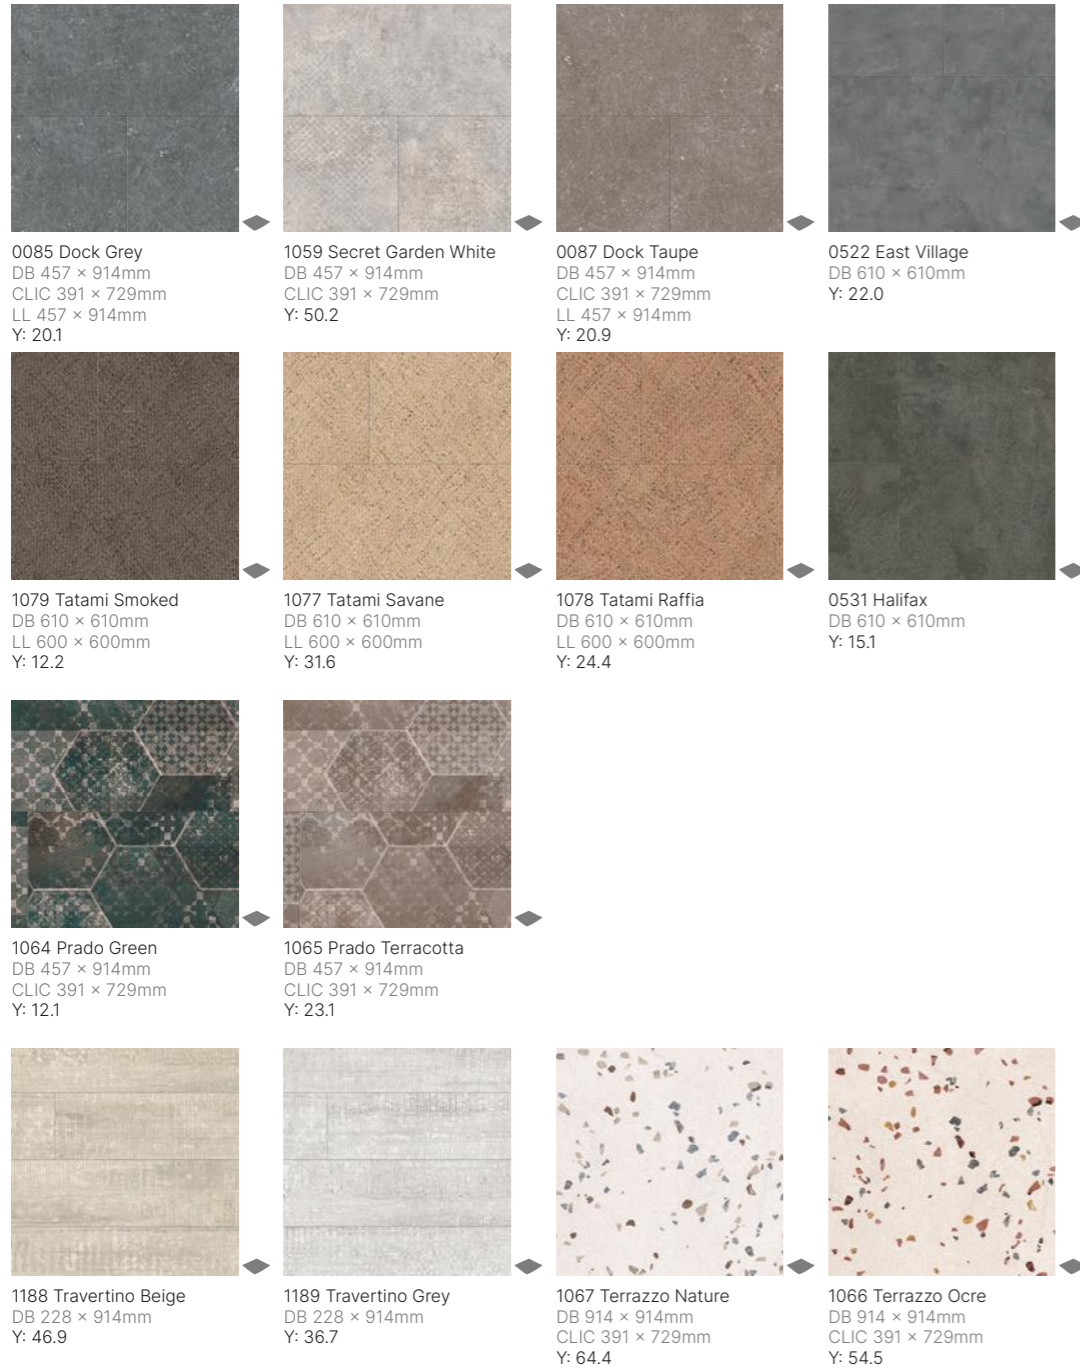

0.7mm Wear Layer | **T** Wear Group | **R10** Slip Resistant

 **PUR+ Matt** | **DB** Creation 70 Dryback | **CLIC** Creation 70 Clic | **LL** Creation 70 Looselay | **Y** = Light Reflectance Value (LRV)



1077 Tatami Savane

Creation 55 Luxury Vinyl Tiles & Planks (LVT)

NEW RANGE

Creation 55 Solid Clic is a luxury, vinyl plank flooring with an innovative, built-in, vertical interlocking system that clicks together for quick and straightforward installation without adhesive or specialist tools and fitting skills.

It installs cleanly without creating dust and noise or damage to the surface beneath and can be walked on immediately. Individual planks can also be lifted for easy replacement.

Suitable for medium traffic areas and domestic use, it has a ProtecShield™ surface coating for extra resilience and easy cleaning. The authentic wood designs with enhanced graining are complementary to wide ranging décor schemes.

Creation 55 Dryback is available in wood and mineral effect tiles and planks that can enhance any interior décor. A popular choice for medium traffic areas in the retail, office, administration, leisure, hotel, hospitality markets as well as suitable for domestic use.

Creation 55 Looselay / Looselay Acoustic are looselay flooring collections adapted for medium traffic applications. Fast and easy to install and ready to use out of the box, they are easily removable without leaving messy adhesive residue. Looselay up to 30sqm. Creation 55 Looselay Acoustic incorporates a backing with an acoustic core which delivers up to 19dB impact sound reduction.

Creation 55 Rigid Acoustic is a decorative interlocking floorcovering assembled with an angle to angle locking system to provide robust and easy installation. Available as a tile or plank Creation 55 Rigid Acoustic is made up of a 0.55 mm thick transparent wear layer, a high definition printing film to provide an hyper realistic design, a Full Rigid Board to provide high performances for heavy renovations and an integrated underlayer 100% recyclable which provides a 19dB sound reduction. The product is 100% recyclable and made with up to 35% of recycled content. It is 100% compliant with REACH.



Creation 55 is available in Solid Clic, Dryback, Looselay, Looselay Acoustic and Rigid Acoustic variations

0347 Ballerina



		Creation 55					
		Solid Clic	Rigid Acoustic	Looselay	Looselay Acoustic	Dryback	
Description							
Thickness	EN ISO 24346	mm	5.0	6.0	4.5	5.5	2.5
Wear layer thickness	EN ISO 24340	mm	0.55	0.55	0.55	0.55	0.55
Weight	EN ISO 23997	g/m ²	7781	9480	7500	7600	3850
Size	EN ISO 24342	mm	Planks: 212 × 1239 240 × 1461 Tile: 389 × 729	Planks: 125 × 750 177 × 1219 225 × 1524 Tile: 457 × 914	Plank: 229 × 1220 Tiles: 500 × 500 600 × 600	Plank: 229 × 1220 Tile: 500 × 500	Planks: 184 × 1219 230 × 1500 152 × 762 Tiles: 457 × 914 610 × 610 914 × 914
Classification							
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582	EN ISO 10582	EN 651	EN ISO 10582
European classification	EN ISO 10874	class	33 - 42	33 - 42	33 - 42	33 - 42	33 - 42
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2	< 2
Slip resistance wet	DIN 51130	class	R10	R10	R10	R10	R10
Performances							
Wear resistance	EN 660.2	mm ³	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
Wear group	-	group	T	T	T	T	T
Type binder content	ISO 10582	type	I	I	I	i	I
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.15	≤ 0.25
Dimensional stability (measured value)	-	%	≤ 0.05	≤ 0.10	≤ 0.05	≤ 0.05	≤ 0.10
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.05	≤ 0.05	≤ 0.20	≤ 0.10
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Impact sound insulation	EN ISO 717-2	dB	4	19	7	19	4
Chemical products resistance	EN ISO 26987	-	OK	OK	OK	OK	OK
Surface treatment	-	-	ProtecShield™	ProtecShield™	ProtecShield™	ProtecShield™	ProtecShield™
TVOC after 28 days	ISO 16000-6	µg/m ³	< 10	< 10	< 10	< 10	< 10
CE Marking							
CE	EN 14041						



Matching decorative strips are available for all Creation 55 collections

Creation 55

Luxury Vinyl Tiles & Planks (LVT)

NEW RANGE

- > **Creation 55 Dryback** is a glued floorcovering
- > **Creation 55 Solid Clic** interlocking planks that can be laid without adhesive
- > **Creation 55 Rigid Acoustic** "Full rigid board" technology with an integrated acoustic underlay
- > **Creation 55 Looselay / Looselay Acoustic** Looselay up to 30sqm, removable installation with tackifier above 30sqm.
Acoustic version delivers 19dB impact sound reduction
- > Suitable for medium traffic areas
- > Low maintenance due to Polyurethane (ProtecShield™) surface treatment



0465 Cambridge
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm

Y: 38.9



0849 Cedar Pure
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm
RIGID AC 225 × 1524mm

Y: 39.8



0796 Swiss Oak Golden
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm

Y: 25.8




0441 Honey Oak
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm

Y: 27.7



0504 Twist
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm

Y: 38.9

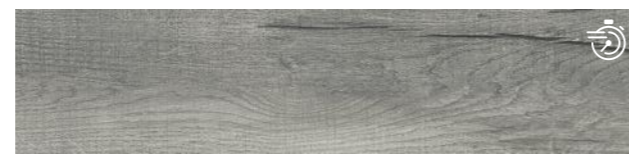

0846 Swiss Oak Pearl
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm

Y: 36.1



0853 Bostonian Oak Beige
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm | LL 229 × 1220mm

Y: 36.7



0871 Bostonian Oak
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm | LL 229 × 1220mm

Y: 26.4



0850 Cedar Brown
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm
RIGID AC 225 × 1524mm

Y: 21.3



0851 Bostonian Oak Honey
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm

Y: 29.8



0870 Quartet Honey
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm | LL 229 × 1220mm

Y: 33.3



0347 Ballerina
DB 184 × 1219mm, 152 × 762mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm, 125 × 750mm | LL 229 × 1220mm
LL AC 229 × 1220mm

Y: 30.6

Plank |
 ProtecShield™ |
 0.55mm |
 Wear Layer |
 T Wear Group |
 R10 Slip Resistant |
 Y = Light Reflectance Value (LRV) |
 Stocked for quick delivery see inside front cover

DB Creation 55 Dryback |
 SOLID CLIC Creation 55 Solid Clic |
 RIGID AC Creation 55 Rigid Acoustic |
 LL Creation 55 Looselay |
 LL AC Creation 55 Looselay Acoustic



0465 Cambridge

Creation 55

Luxury Vinyl Tiles & Planks (LVT)

NEW RANGE

- > **Creation 55 Dryback** is a glued floorcovering
- > **Creation 55 Solid Clic** interlocking planks that can be laid without adhesive
- > **Creation 55 Rigid Acoustic** "Full rigid board" technology with an integrated acoustic underlay
- > **Creation 55 Looselay / Looselay Acoustic** Looselay up to 30sqm, removable installation with tackifier above 30sqm.
Acoustic version delivers 19dB impact sound reduction
- > Suitable for medium traffic areas
- > Low maintenance due to Polyurethane (ProtecShield™) surface treatment



0584 White Lime Y: 36.0
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm | RIGID AC 177 × 1219mm



0859 Quartet Fauve Y: 23.1
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm | LL 229 × 1220mm



0858 Stripe Oak Ice Y: 37.3
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm



0503 Quartet Y: 21.3
DB 184 × 1219mm, 152 × 762mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm, 125 × 750mm



0060 Arena Y: 37.2
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm | LL 229 × 1220mm
LL AC 229 × 1220mm



0848 Swiss Oak Beige Y: 40.1
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm



0448 Malua Bay Y: 47.1
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm



0455 Longboard Y: 24.8
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm




0856 Paint Wood Taupe Y: 27.1
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm



0457 Buffalo Y: 16.3
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm




0456 Ranch Y: 23.5
DB 184 × 1219mm, 230 × 1500mm
SOLID CLIC 212 × 1239mm, 240 × 1461mm | RIGID AC 177 × 1219mm
LL 229 × 1220mm | LL AC 229 × 1220mm

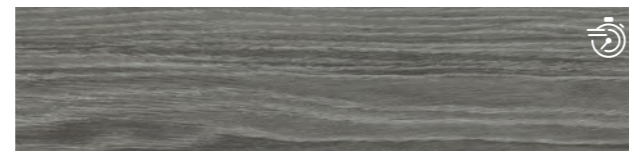

0061 Oxford Y: 19.2
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm

Plank |
 ProtecShield™ |
 0.55mm |
 Wear Layer |
 T Wear Group |
 R10 Slip Resistant |
 Y = Light Reflectance Value (LRV) |
 Stocked for quick delivery see inside front cover

DB Creation 55 Dryback |
 SOLID CLIC Creation 55 Solid Clic |
 RIGID AC Creation 55 Rigid Acoustic |
 LL Creation 55 Looselay |
 LL AC Creation 55 Looselay Acoustic

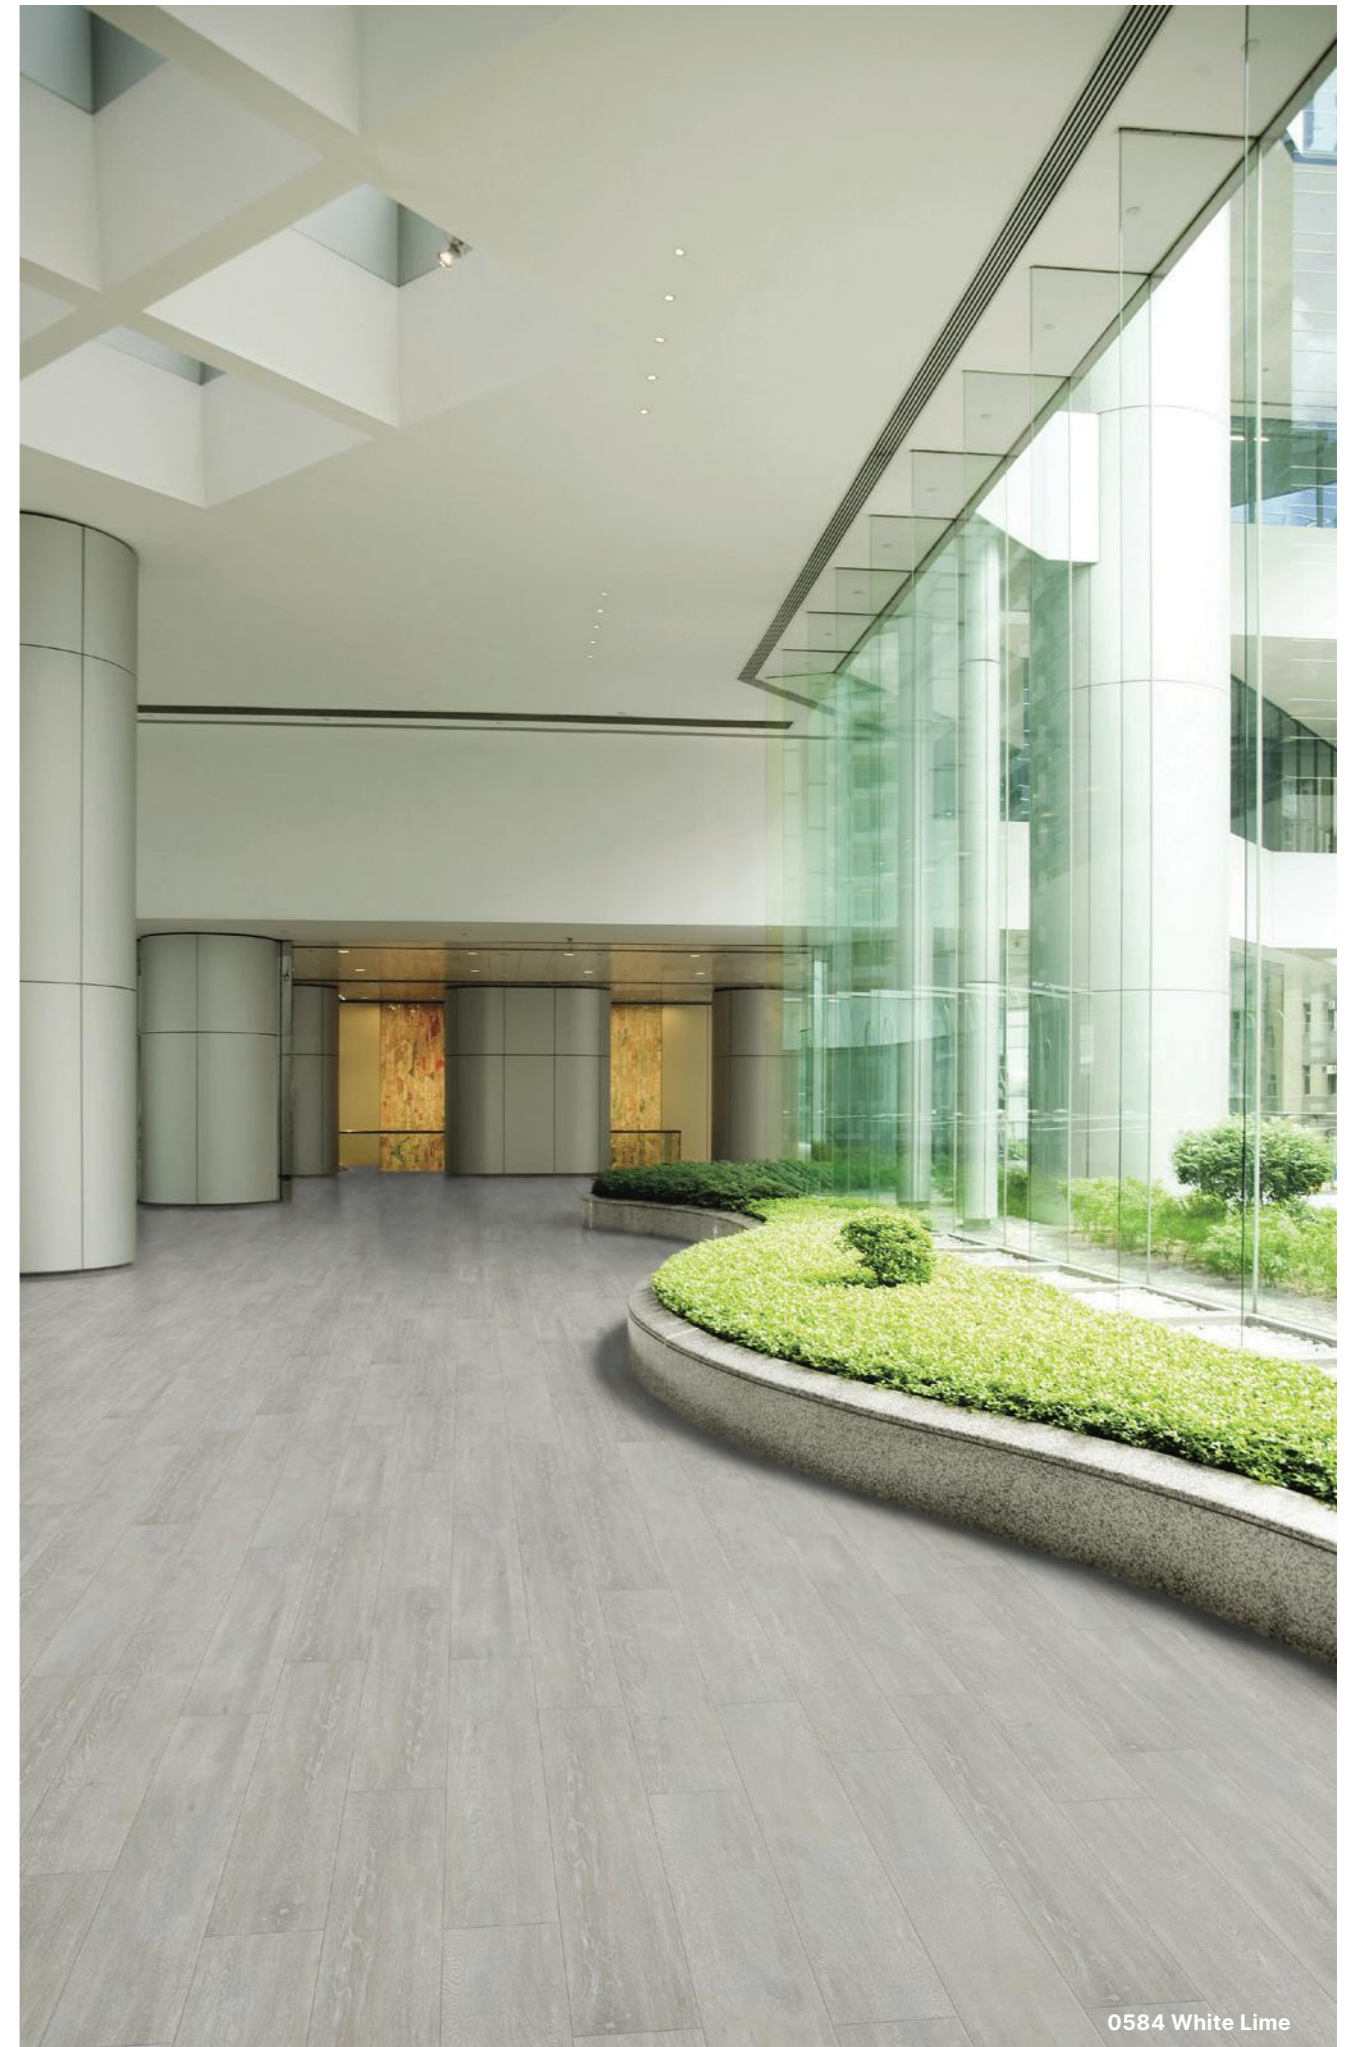

0584 White Lime

Creation 55

Luxury Vinyl Tiles & Planks (LVT)

NEW RANGE

- > **Creation 55 Dryback** is a glued floorcovering
- > **Creation 55 Solid Clic** interlocking planks that can be laid without adhesive
- > **Creation 55 Rigid Acoustic** "Full rigid board" technology with an integrated acoustic underlay
- > **Creation 55 Looselay / Looselay Acoustic** Looselay up to 30sqm, removable installation with tackifier above 30sqm. Acoustic version delivers 19dB impact sound reduction
- > Suitable for medium traffic areas
- > Low maintenance due to Polyurethane (ProtecShield™) surface treatment



1281 Palissandro Grey
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm
Y: 38.4



1282 Palissandro Beige
DB 230 × 1500mm | SOLID CLIC 240 × 1461mm
Y: 32.1



1287 Salento Light Grey
DB 184 × 1219mm | SOLID CLIC 212 × 1239 mm
RIGID AC 177 × 1219mm
Y: 46.6



1286 Salento Beige
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm
Y: 37.0




0069 Mansfield Natural
DB 184 × 1219mm
Y: 37.7



0579 Amarante
DB 184 × 1219mm
Y: 19.9



0447 Amador
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm | LL 229 × 1220mm | LL AC 229 × 1220mm
Y: 25.1

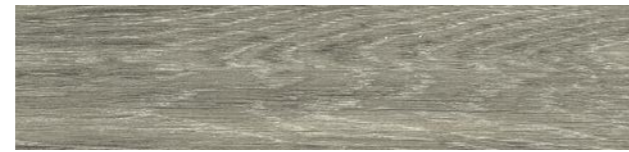

0068 Mansfield Light
DB 184 × 1219mm
Y: 31.8



0461 Michigan
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm
Y: 13.8



0445 Rustic Oak
DB 184 × 1219mm | SOLID CLIC 212 × 1239mm
RIGID AC 177 × 1219mm
Y: 20.4



0459 Brownie
DB 184 × 1219mm
Y: 10.7

ProtecShield™ | **0.55mm** Wear Layer | **T** Wear Group | **R10** Slip Resistant | **Y** = Light Reflectance Value (LRV) | Stocked for quick delivery see inside front cover

DB Creation 55 Dryback | **SOLID CLIC** Creation 55 Solid Clic | **RIGID AC** Creation 55 Rigid Acoustic | **LL** Creation 55 Looselay | **LL AC** Creation 55 Looselay Acoustic










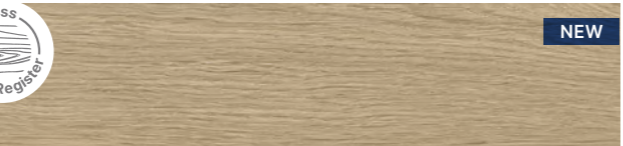
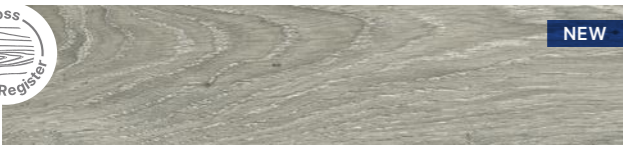
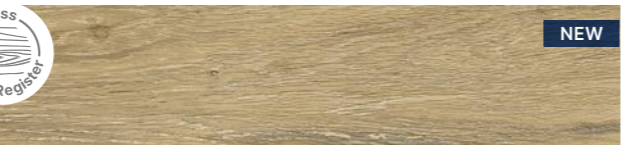

0447 Amador

Creation 55





Luxury Vinyl Tiles & Planks (LVT)

NEW RANGE

- > **Creation 55 Dryback** is a glued floorcovering
- > **Creation 55 Solid Clic** interlocking planks that can be laid without adhesive - Clic will be available from January 2023
- > **Creation 55 Looselay / Looselay Acoustic** Looselay up to 30sqm, removable installation with tackifier above 30sqm. Acoustic version delivers 19dB impact sound reduction
- > Suitable for medium traffic areas
- > Low maintenance due to Polyurethane (ProtecShield™) surface treatment

 <p>NEW</p> <p>1280 Charming Oak Brown DB 184 × 1219mm SOLID CLIC 212 × 1239mm RIGID AC 177 × 1219mm</p> <p>Y: 13.4</p>	 <p>NEW</p> <p>1277 Charming Oak Nature DB 184 × 1219mm SOLID CLIC 212 × 1239mm RIGID AC 177 × 1219mm</p> <p>Y: 18.6</p>
 <p>NEW</p> <p>1278 Charming Oak Beige DB 184 × 1219mm SOLID CLIC 212 × 1239mm RIGID AC 177 × 1219mm</p> <p>Y: 31.5</p>	 <p>NEW</p> <p>1279 Charming Oak Grey DB 184 × 1219mm SOLID CLIC 212 × 1239mm RIGID AC 177 × 1219mm</p> <p>Y: 36.2</p>
 <p>NEW</p> <p>1274 Lounge Oak Chestnut DB 230 × 1500mm SOLID CLIC 240 × 1461mm RIGID AC 225 × 1524mm</p> <p>Y: 20.5</p>	 <p>NEW</p> <p>1271 Lounge Oak Golden DB 230 × 1500mm SOLID CLIC 240 × 1461mm RIGID AC 225 × 1524mm</p> <p>Y: 23.8</p>
 <p>NEW</p> <p>1273 Lounge Oak Natural DB 230 × 1500mm SOLID CLIC 240 × 1461mm RIGID AC 225 × 1524mm</p> <p>Y: 30.2</p>	 <p>NEW</p> <p>1272 Lounge Oak Beige DB 230 × 1500mm SOLID CLIC 240 × 1461mm RIGID AC 225 × 1524mm</p> <p>Y: 33.9</p>
 <p>NEW</p> <p>1290 White Lead Oak Shadow Grey DB 184 × 1219mm</p> <p>Y: 34.6</p>	 <p>NEW</p> <p>1288 White Lead Oak Blond DB 184 × 1219mm</p> <p>Y: 29.6</p>
 <p>NEW</p> <p>1289 White Lead Oak Dark Beige DB 184 × 1219mm</p> <p>Y: 25.3</p>	

 Plank |
  ProtecShield™ |
  0.55mm |
  Wear Layer |
  T Wear Group |
  R10 Slip Resistant |
  Y = Light Reflectance Value (LRV)

 **DB** Creation 55 Dryback |
  **SOLID CLIC** Creation 55 Solid Clic |
  **RIGID AC** Creation 55 Rigid Acoustic |
  **EIR = Emboss In Register** Synchronized graining with the decor for hyper-realistic rendering

















1280 Charming Oak Brown

Creation 55

Luxury Vinyl Tiles & Planks (LVT)

NEW RANGE

- > **Creation 55 Dryback** is a glued floorcovering
- > **Creation 55 Solid Clic** interlocking planks that can be laid without adhesive
- > **Creation 55 Rigid Acoustic** "Full rigid board" technology with an integrated acoustic underlay
- > **Creation 55 Looselay / Looselay Acoustic** Looselay up to 30sqm, removable installation with tackifier above 30sqm.
Acoustic version delivers 19dB impact sound reduction
- > Suitable for medium traffic areas
- > Low maintenance due to Polyurethane (ProtecShield™) surface treatment

				
1284 Urban Street Medium DB 914 × 914mm SOLID CLIC 389 × 729mm LL 600 × 600mm Y: 26.5	1283 Urban Street Light DB 914 × 914mm SOLID CLIC 389 × 729mm LL 600 × 600mm Y: 42.3	1285 Urban Street Beige DB 914 × 914mm Y: 31.2	0373 Silver City DB 610 × 610mm Y: 19.1	0436 Riverside DB 610 × 610mm SOLID CLIC 389 × 729mm RIGID AC 457 × 914mm LL 600 × 600mm Y: 16.7
				
1275 Curton Stone Light Grey DB 457 × 914mm SOLID CLIC 389 × 729mm RIGID AC 457 × 914mm Y: 45.9	1276 Curton Stone Light Beige DB 457 × 914mm SOLID CLIC 389 × 729mm RIGID AC 457 × 914mm Y: 48.9	1269 Fabrik Mix Dark Grey DB 610 × 610mm SOLID CLIC 389 × 729mm LL 600 × 600mm Y: 13.4	1270 Fabrik Mix Indigo DB 610 × 610mm LL 600 × 600mm Y: 17.1	1268 Fabrik Mix Jute DB 610 × 610mm SOLID CLIC 389 × 729mm Y: 26.3
				
0868 Bloom Uni Taupe DB 610 × 610mm SOLID CLIC 389 × 729mm RIGID AC 457 × 914mm LL 600 × 600mm Y: 28.5	0618 Carmel DB 457 × 914mm SOLID CLIC 389 × 729mm RIGID AC 457 × 914mm LL 500 × 500mm LL AC 500 × 500mm Y: 19.2	0374 Parker Station DB 610 × 610mm SOLID CLIC 389 × 729mm RIGID AC 457 × 914mm LL 500 × 500mm LL AC 500 × 500mm Y: 12.6	0869 Bloom Uni Grey DB 610 × 610mm SOLID CLIC 389 × 729mm RIGID AC 457 × 914mm LL 600 × 600mm Y: 23.2	



1284 Urban Street Medium / 1283 Urban Street Light


ProtecShield™ | **0.55mm** Wear Layer | **T** Wear Group | **R10** Slip Resistant | **Y** = Light Reflectance Value (LRV) |  Stocked for quick delivery see inside front cover

DB Creation 55 Dryback | **SOLID CLIC** Creation 55 Solid Clic | **RIGID AC** Creation 55 Rigid Acoustic | **LL** Creation 55 Looselay | **LL AC** Creation 55 Looselay Acoustic

Saga² Luxury Vinyl Tiles

Saga² is a fast track loose lay tile that provides the durability of a compact tile with the comfort of an acoustic tile. The tile overcomes the difficulty of many irregular sub-floors and prevents their indentations transferring to the surface. With a wide range of stylish designs available and is suitable for high traffic areas including offices, boutiques, public areas as well as other administrative areas.



High traffic floor tile, removable installation suitable for raised floors

0030 Gentleman Blue


























Saga ²			
Description			
Thickness	EN ISO 24346	mm	4.6
Wear layer thickness	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/m ²	5595
Size	EN ISO 24342	mm	500 × 500
Classification			
Norm / Product specification	-	-	EN 652
European classification	EN ISO 10874	class	34-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	DIN 51 130	class	R10
Performances			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	-	T
Type binder content	ISO 10582	type	-
Dimensional stability	EN ISO 23999	%	≤ 0.15
Residual indentation	EN ISO 24343-1	mm	≤ 0.13
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25
Shore hardness D	EN ISO 868	HD	-
Impact sound insulation	EN ISO 717-2	dB	15
Colour fastness	EN 20 105-B02	degree	≥ 6
Chemical products resistance	EN ISO 26987	-	OK
Surface treatment	-	-	Protectsol®
TVOC after 28 days	ISO 16000-6	µg/m ³	< 100
CE Marking			
CE	EN 14041		

Saga²

Luxury Vinyl Tiles

- > Acoustic fast track tiles suitable for high traffic areas
- > ProtecSol® surface treatment - easy to maintain
- > Ideal for use alongside carpet tiles

				
0063 Rough Textile Grey 500.5 × 500.5mm Y: 21.1	0062 Rough Textile Beige 500.5 × 500.5mm Y: 25.4	0021 Barma Sweet 500.5 × 500.5mm Y: 25.0	0023 Barma Mystery 500.5 × 500.5mm Y: 11.3	0025 Barma Beige 500.5 × 500.5mm Y: 34.3
				
0572 Amarante Dark 500.5 × 500.5mm Y: 17.6	0579 Amarante 500.5 × 500.5mm Y: 21.3	0028 Fiber Silver 500.5 × 500.5mm Y: 35.5	0027 Fiber Heavy Metal 500.5 × 500.5mm Y: 19.2	0026 Fiber Copper 500.5 × 500.5mm Y: 34.0
				
0039 Spider Blue 500.5 × 500.5mm Y: 17.0	0033 Spider Beige 500.5 × 500.5mm Y: 55.9	0032 Mozaic Grey 500.5 × 500.5mm Y: 37.5	0017 Kadina City 500.5 × 500.5mm Y: 11.3	0577 Albion 500.5 × 500.5mm Y: 21.8
				
0030 Gentleman Blue 500.5 × 500.5mm Y: 8.7	0089 Gentleman Taupe 500.5 × 500.5mm Y: 21.2	0088 Gentleman Grey 500.5 × 500.5mm Y: 12.7	0029 Gentleman Beige 500.5 × 500.5mm Y: 28.5	
				
1088 Dalma Grey 500.5 × 500.5mm Y: 19.0	1089 Dalma Burgundy 500.5 × 500.5mm Y: 24.7	0085 Dock Grey 500.5 × 500.5mm Y: 19.2	0087 Dock Taupe 500.5 × 500.5mm Y: 20.9	

 Tile |
  ProtecSol® |
  0.7mm Wear Layer |
  T Wear Group |
  R10 Slip Resistant |
  15dB Quiet Underfoot |
  Y = Light Reflectance Value (LRV)



0029 Gentleman Beige / 0579 Amarante

GRADUS

Gradus Carpets is a brand of the Gerflor Group and is a UK manufacturer of premium quality carpet tile and plank, broadloom and impervious backed carpets which excel in terms of functionality, aesthetics and ease of maintenance.


Utilising a range of high performance yarns, Gradus' extensive range of carpets are suitable for a wide variety of contract applications including commercial office, healthcare and education environments.



Premium Collection

- Premium design and quality to suit the performance requirements of any area be it a commercial office, education or healthcare application
- Complementary yarn systems and colour bank provide coordinated design schemes


See pages 140 - 161



High Performance Contractor Collection

- Competitively priced without compromising design or performance


See pages 162 - 170



Secondary Barrier Matting

- Provides a solution for entrances, breakout areas or any heavy duty traffic area where contamination needs to be treated effectively
- Unique yarn system removes soil from foot traffic whilst absorbing moisture and being easy to clean

See pages 171 - 175

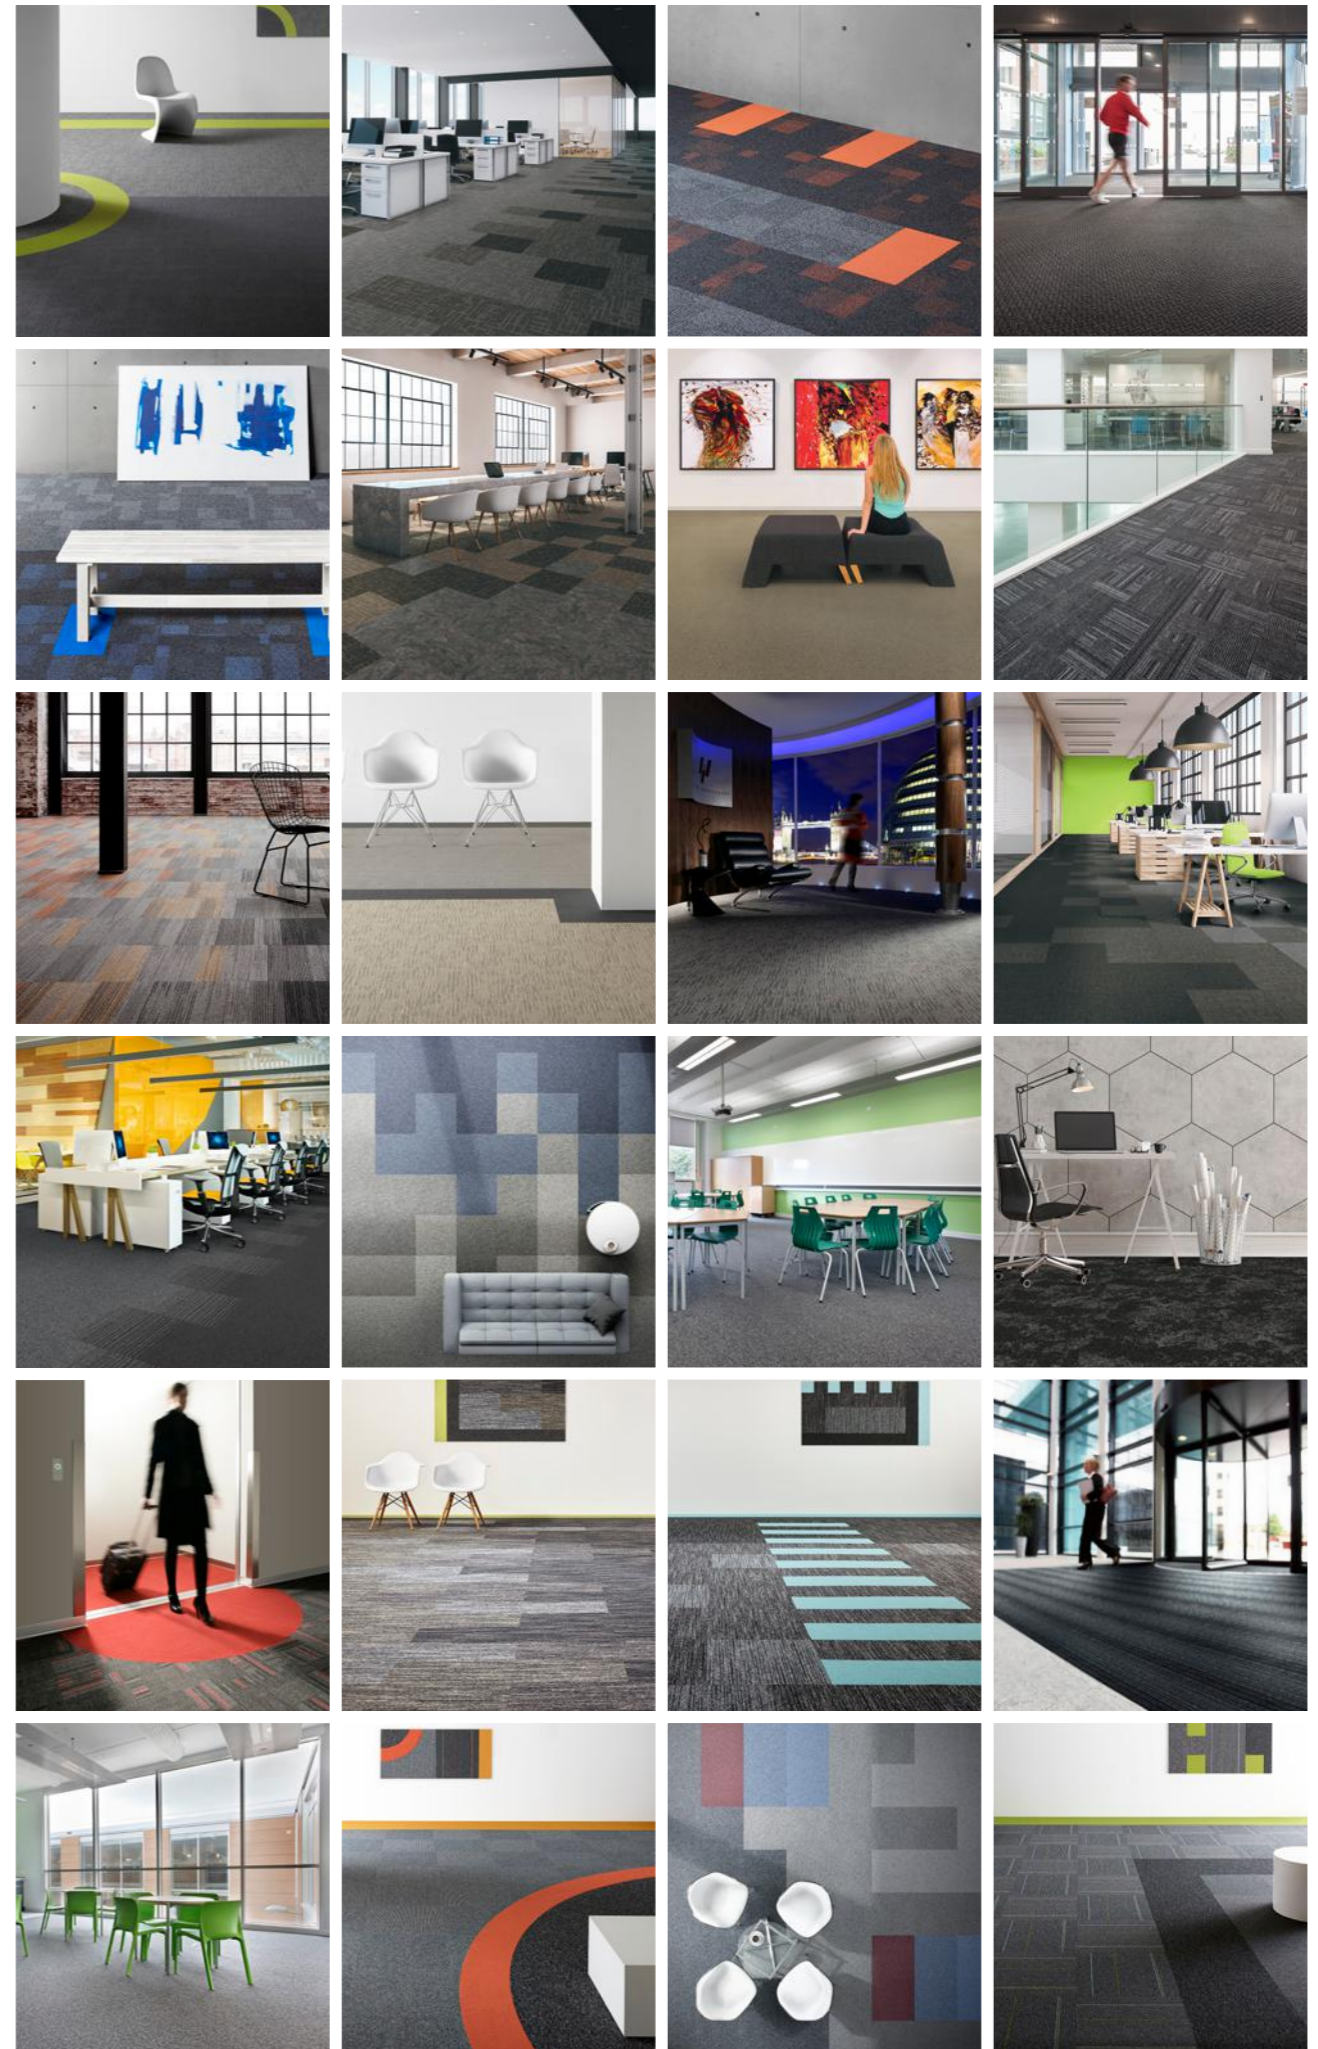


Lunar

Carpet Tile

NEW RANGE


Premium Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating zones and transitions across the floor
- > Complements Creation 55 Looseley LVT

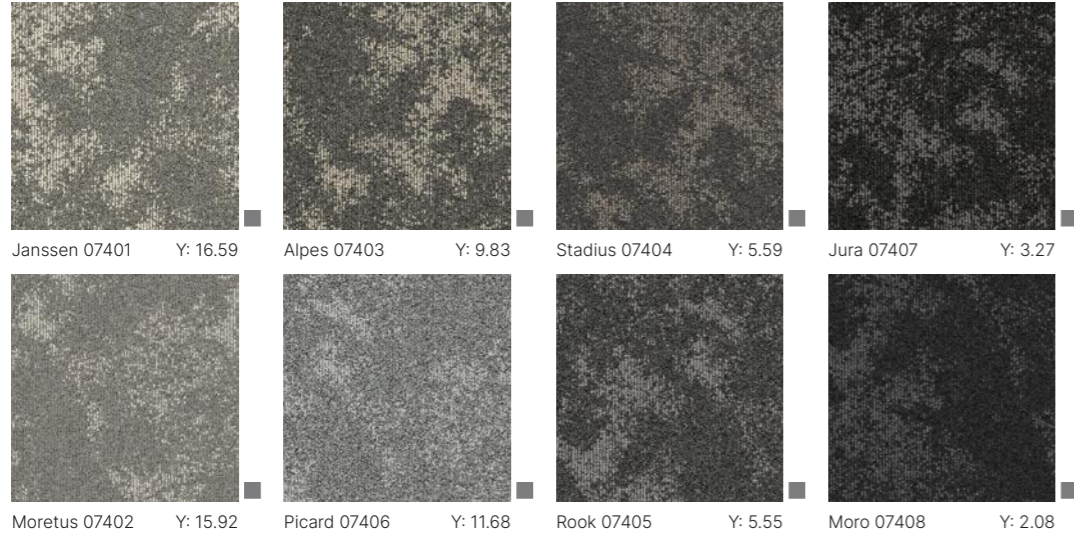

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon
Total Carpet Weight	3600 g/m ²
Tufted Pile Weight	610 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	6mm

For full specification information visit www.gerflor.co.uk



Random

■ Tile | Y = Light Reflectance Value (LRV) | UK CA | CE




Lunar - Jura 07407

Urban Myth

Carpet Tile

Premium Collection



- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating zones and transitions across the floor
- > Complements Creation 55 Looseley LVT

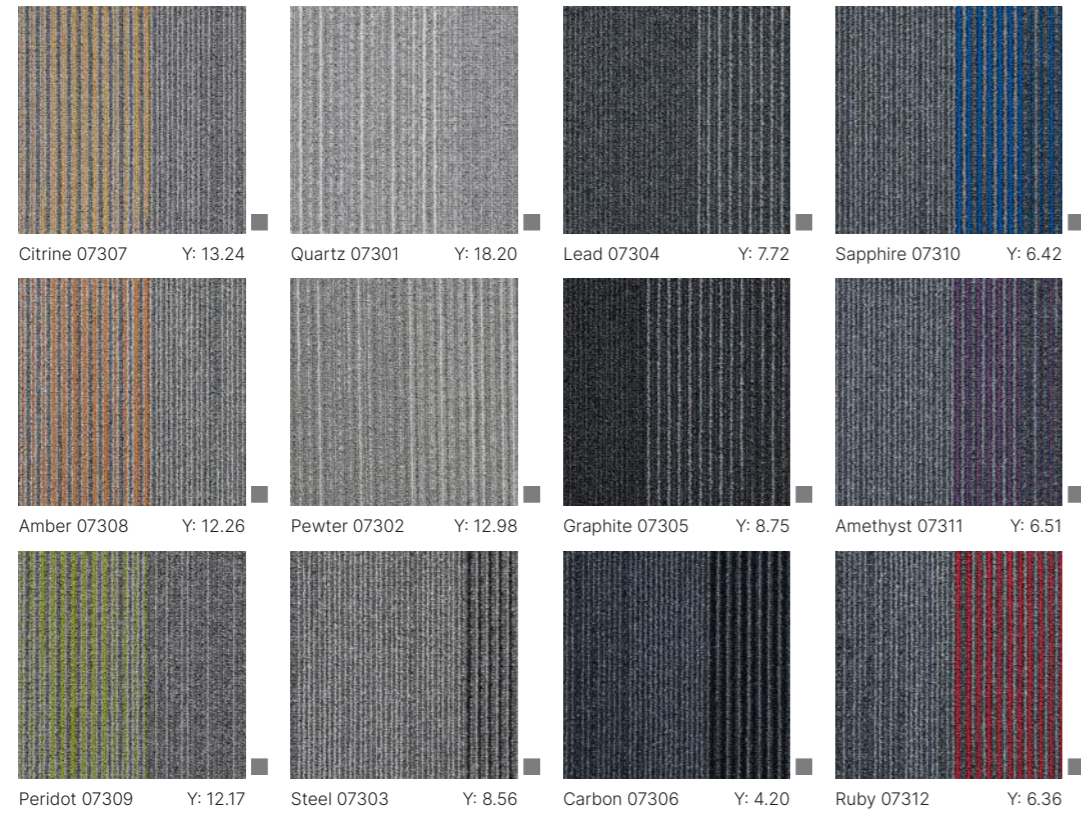

Urban Myth carpet tiles feature a selection of random designs

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon
Total Carpet Weight	3800 g/m ²
Tufted Pile Weight	650 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	6mm

For full specification information visit www.gerflor.co.uk

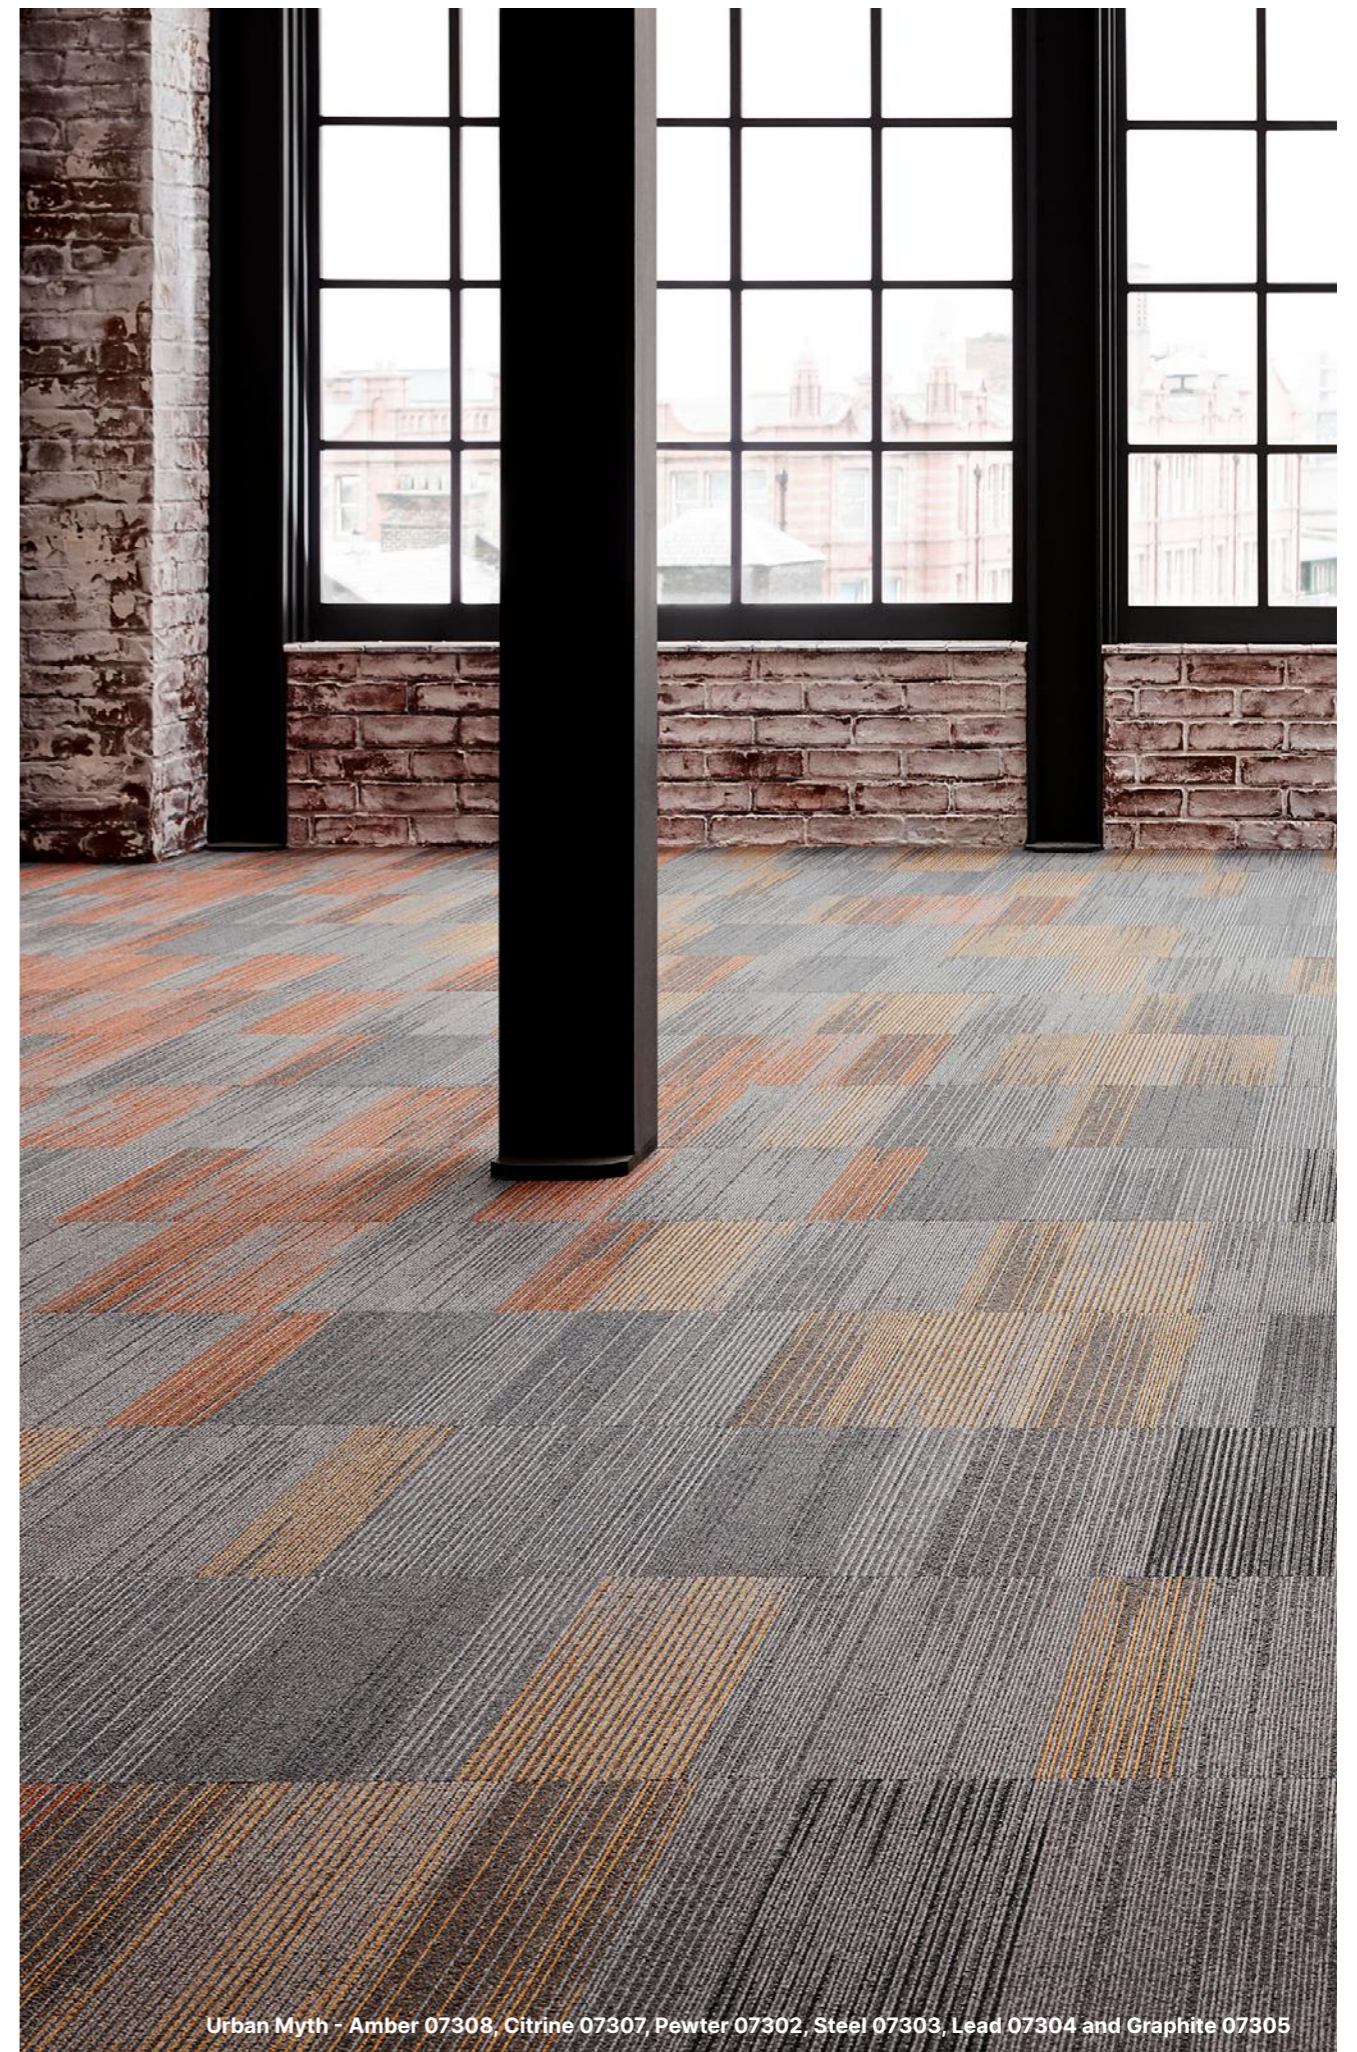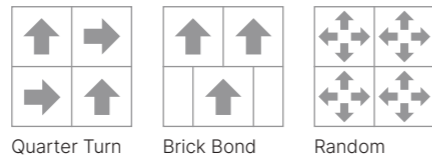


Urban Myth - Amber 07308, Citrine 07307, Pewter 07302, Steel 07303, Lead 07304 and Graphite 07305

Urban Myth

Carpet Plank

Premium Collection


- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating feature areas and transitions across the floor
- > Complements Creation 55 Looseley LVT

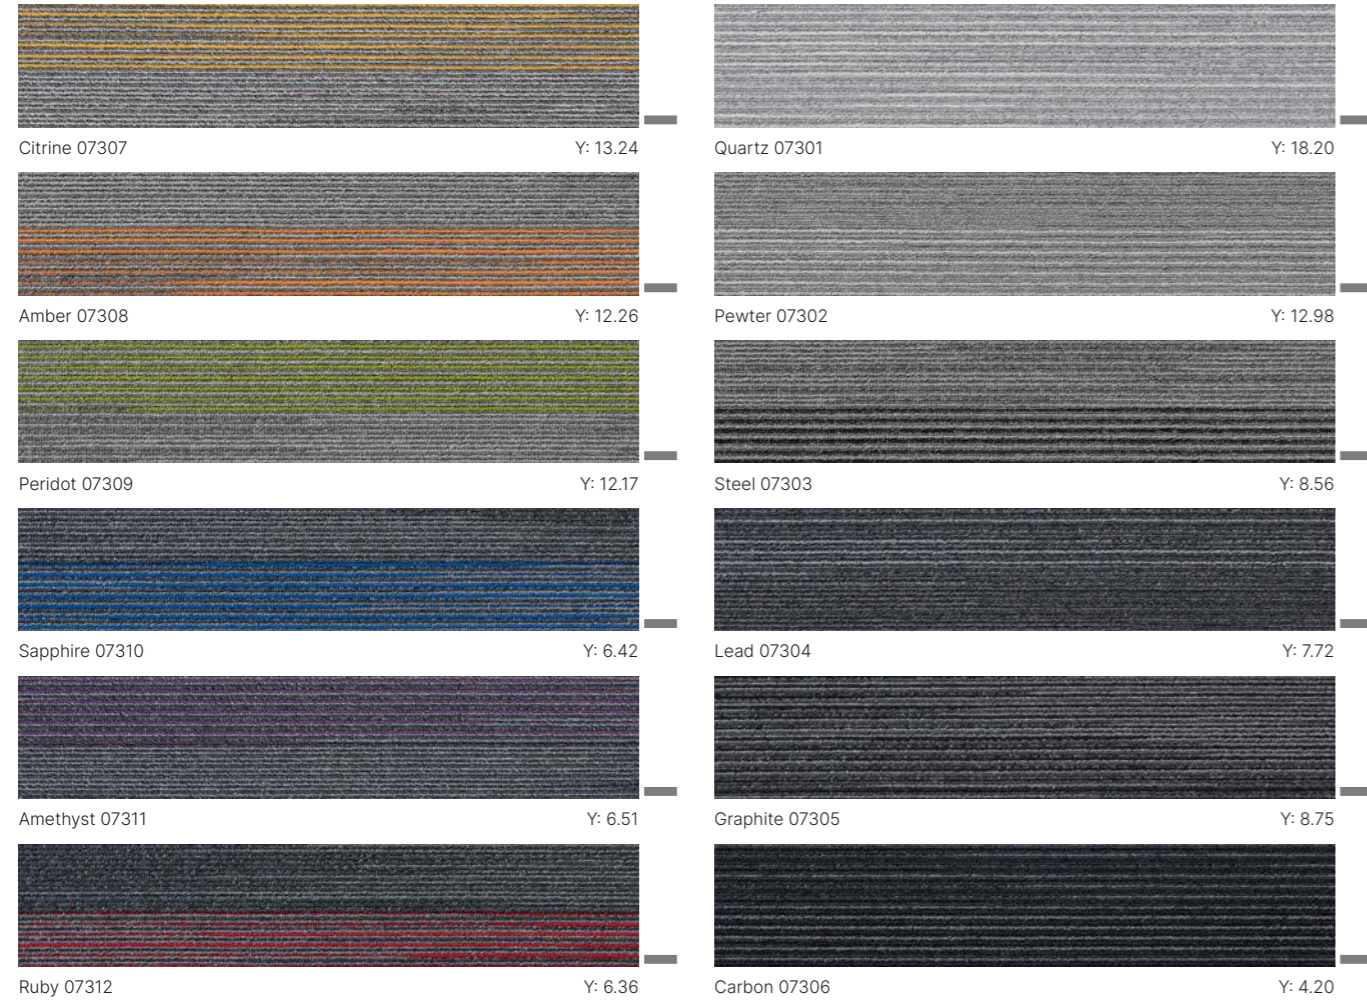

Urban Myth carpet planks feature a selection of random designs

Specification:	Plank
Product Dimensions	250mm x 1000mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon
Total Carpet Weight	3800 g/m ²
Tufted Pile Weight	650 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	6mm

For full specification information visit www.gerflor.co.uk

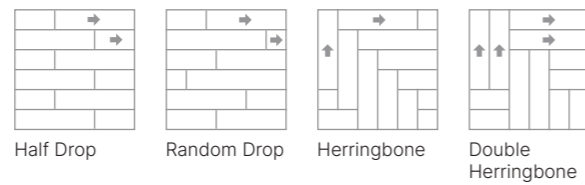

Plank Y = Light Reflectance Value (LRV) UK CA CE



Urban Myth - Sapphire 07310, Carbon 07306, Graphite 07305, Lead 07304, Steel 07303 and Pewter 07302


Streetwise Style

Carpet Tile


Premium Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating zones and transitions across the floor
- > Complements Creation 55 Loose Lay LVT

Trend

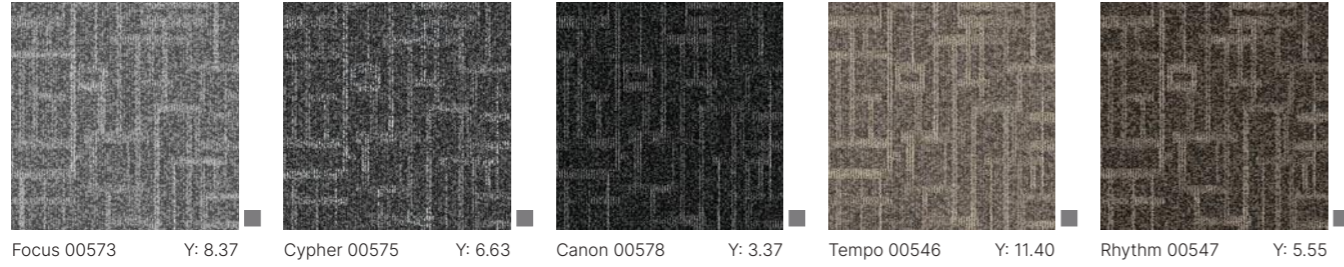

Flair

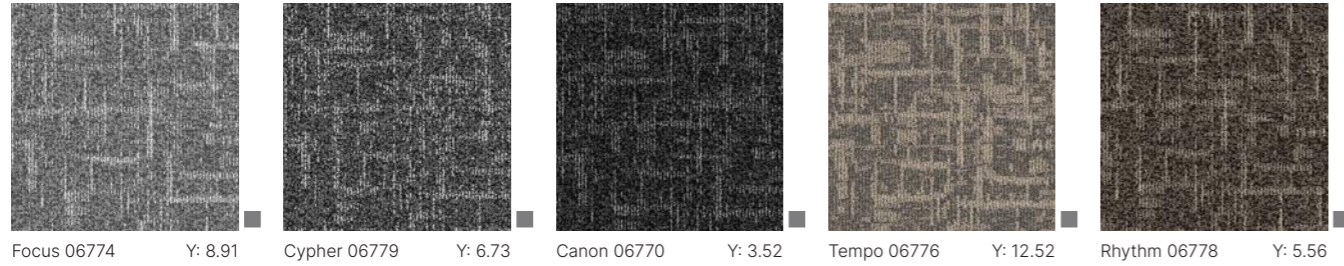


Specification:	Trend	Flair
Product Dimensions	500mm x 500mm	500mm x 500mm
Product Construction	Tufted Loop Pile	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon	100% Solution Dyed Nylon
Total Carpet Weight	4614 g/m ²	4334 g/m ²
Tufted Pile Weight	520 g/m ²	500 g/m ²
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen	Bitumen
Total Carpet Thickness	6.3mm	6.1mm


For full specification information visit www.gerflor.co.uk



Broadloom
Flair



Quarter Turn
Trend
Flair



Brick Bond
Trend
Flair



Streetwise Style - Trend: Focus 00573 with Cypher 00575 and Canon 00578


Streetwise Design

Carpet Tile


Premium Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating zones and feature areas
- > Complements Stratus, Emphasis and Creation 55 Looselay LVT

Brights

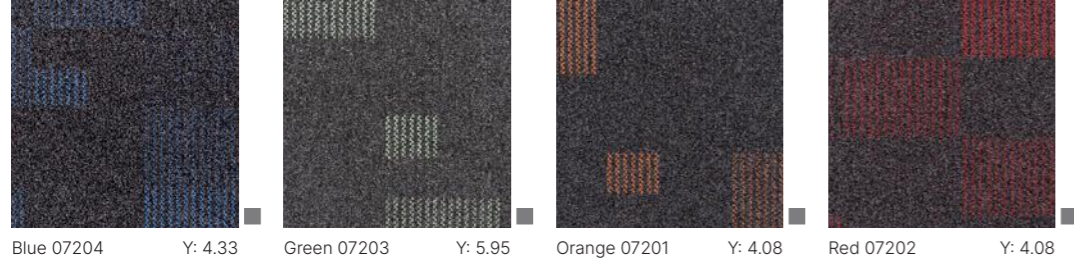


Originals

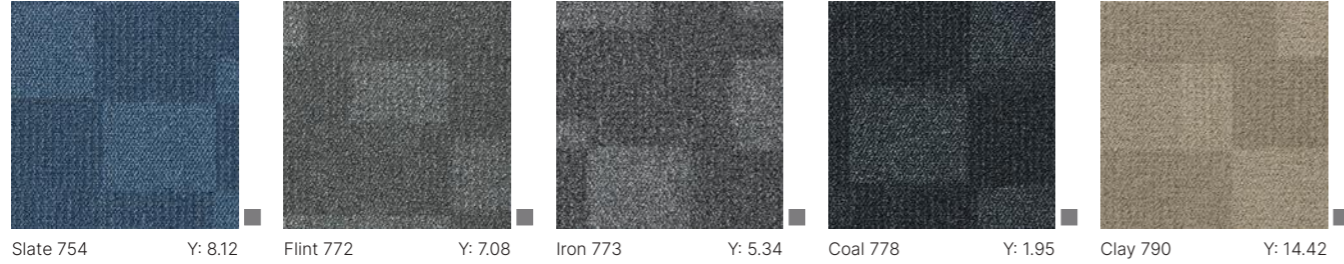


Streetwise Design carpet tiles feature a selection of random designs

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon
Total Carpet Weight	4500 g/m ²
Tufted Pile Weight	650 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	7mm

For full specification information visit www.gerflor.co.uk



Random

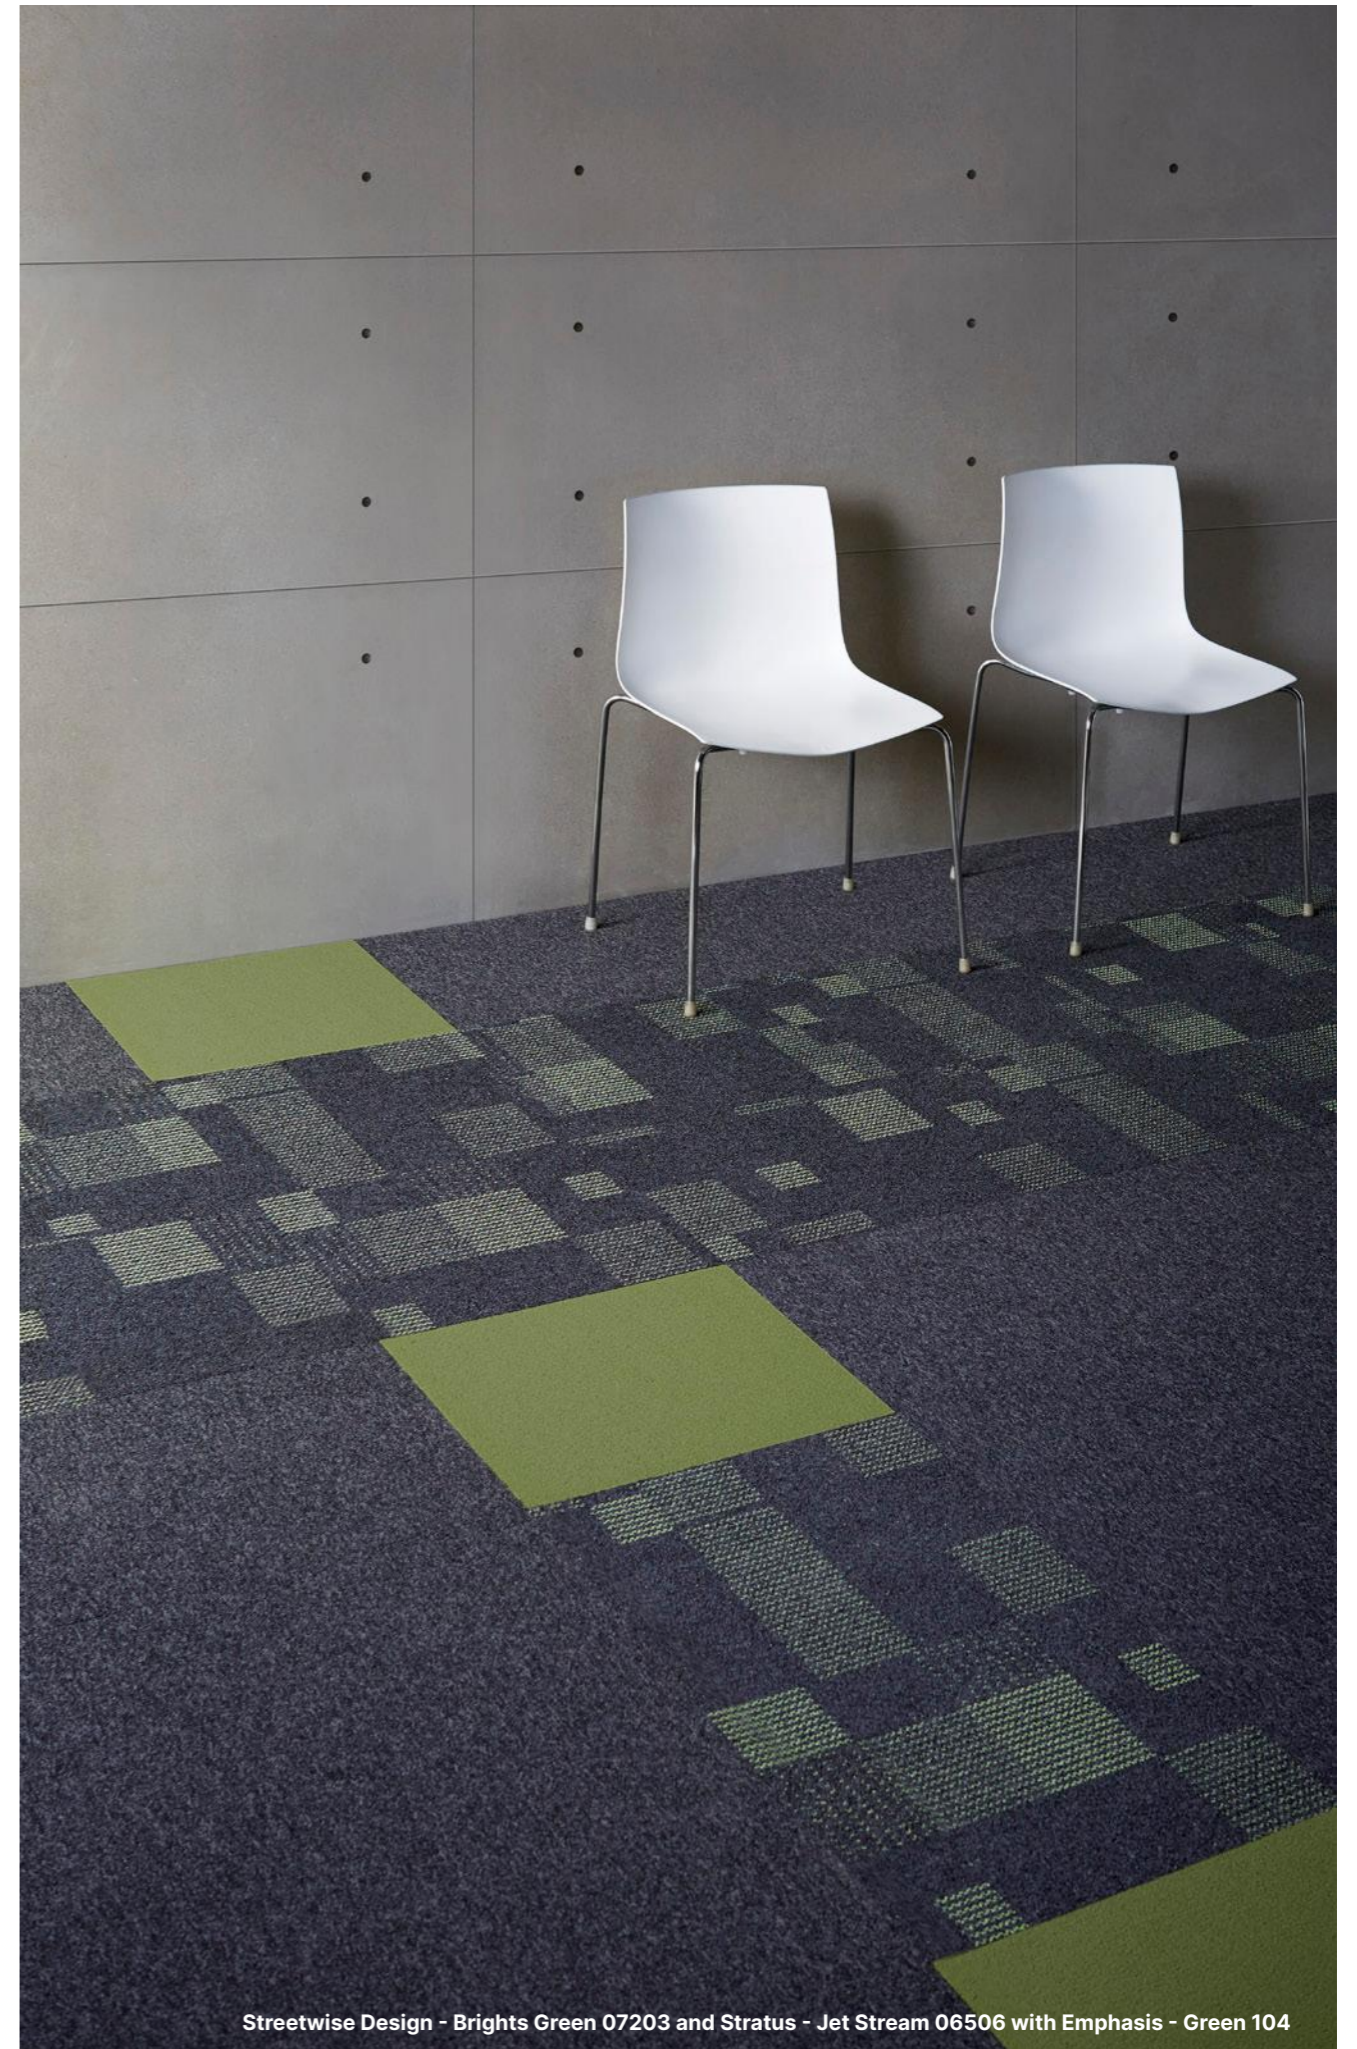

Streetwise Design - Brights Green 07203 and Stratus - Jet Stream 06506 with Emphasis - Green 104


Cityscene & Brickworks

Carpet Tile

Premium Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating zones and transitions across the floor
- > Complements Creation 55 Looseley LVT

Cityscene

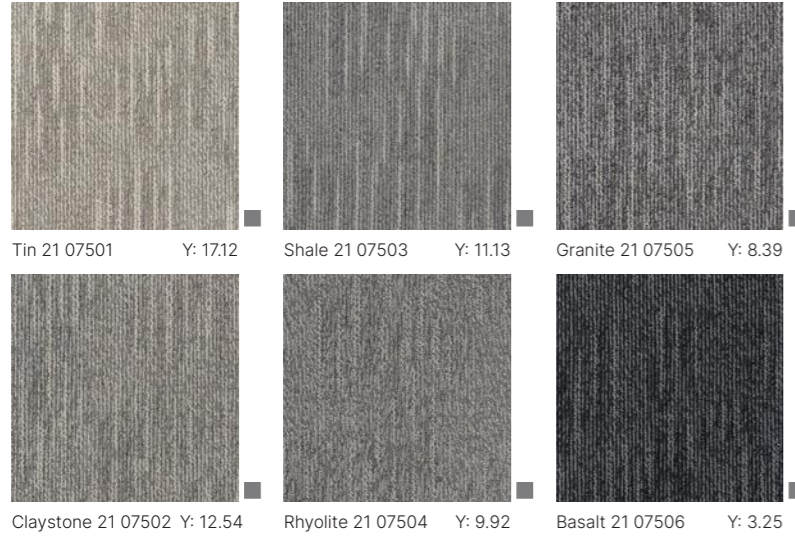


Brickworks



Specification:	Cityscene Tile	Brickworks Tile
Product Dimensions	500mm x 500mm	Specification details available on request
Product Construction	Tufted Loop Pile	
Surface Yarn	100% Solution Dyed Nylon	
Total Carpet Weight	3880 g/m ²	
Tufted Pile Weight	650 g/m ²	
Primary Backing	Non-woven	
Secondary Backing	Bitumen	
Total Carpet Thickness	5.8mm	

For full specification information visit www.gerflor.co.uk

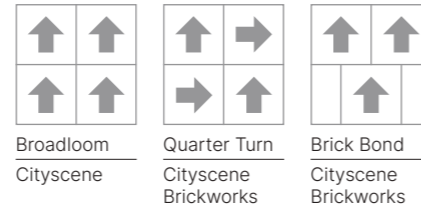


Cityscene - Claystone 21 07502 and Brickworks - Himley 06709 and Ironstone 06707

Times Square

Carpet Tile

Premium Collection


- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating zones and feature areas
- > Excellent acoustic performance and comfort underfoot

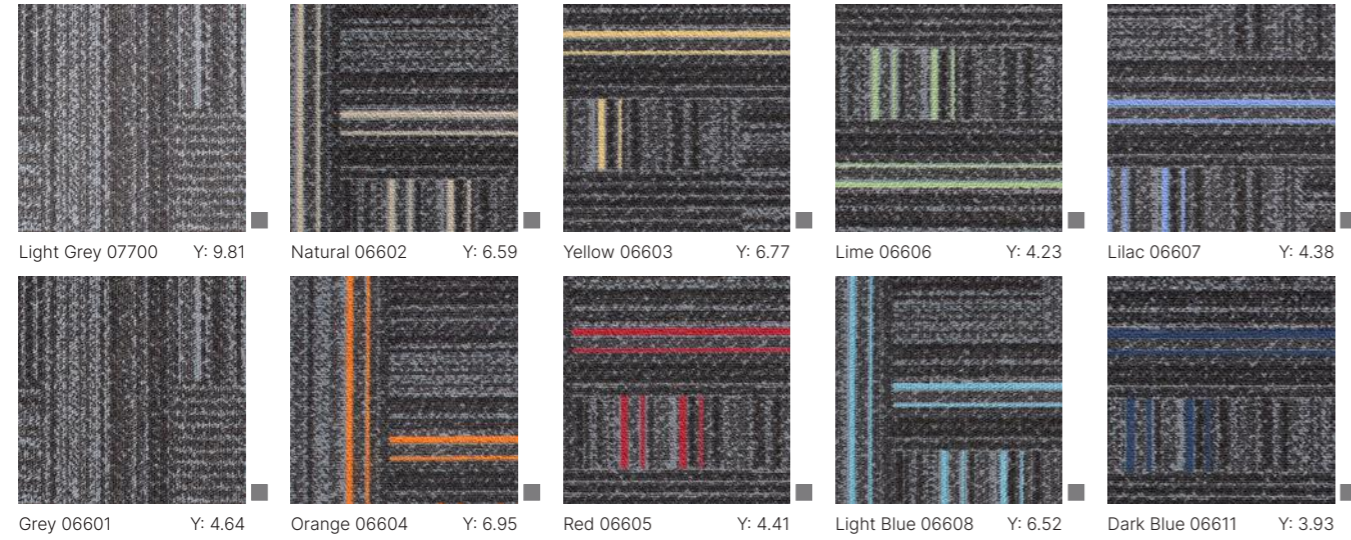


Times Square features 6 unique designs in each colourway

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Nylon
Total Carpet Weight	3700 g/m ²
Tufted Pile Weight	420 g/m ²
Primary Backing	Non-woven
Secondary Backing	Comfort Lite 90% recycled open cell polyurethane cushion
Total Carpet Thickness	8.6mm

For full specification information visit www.gerflor.co.uk



Random

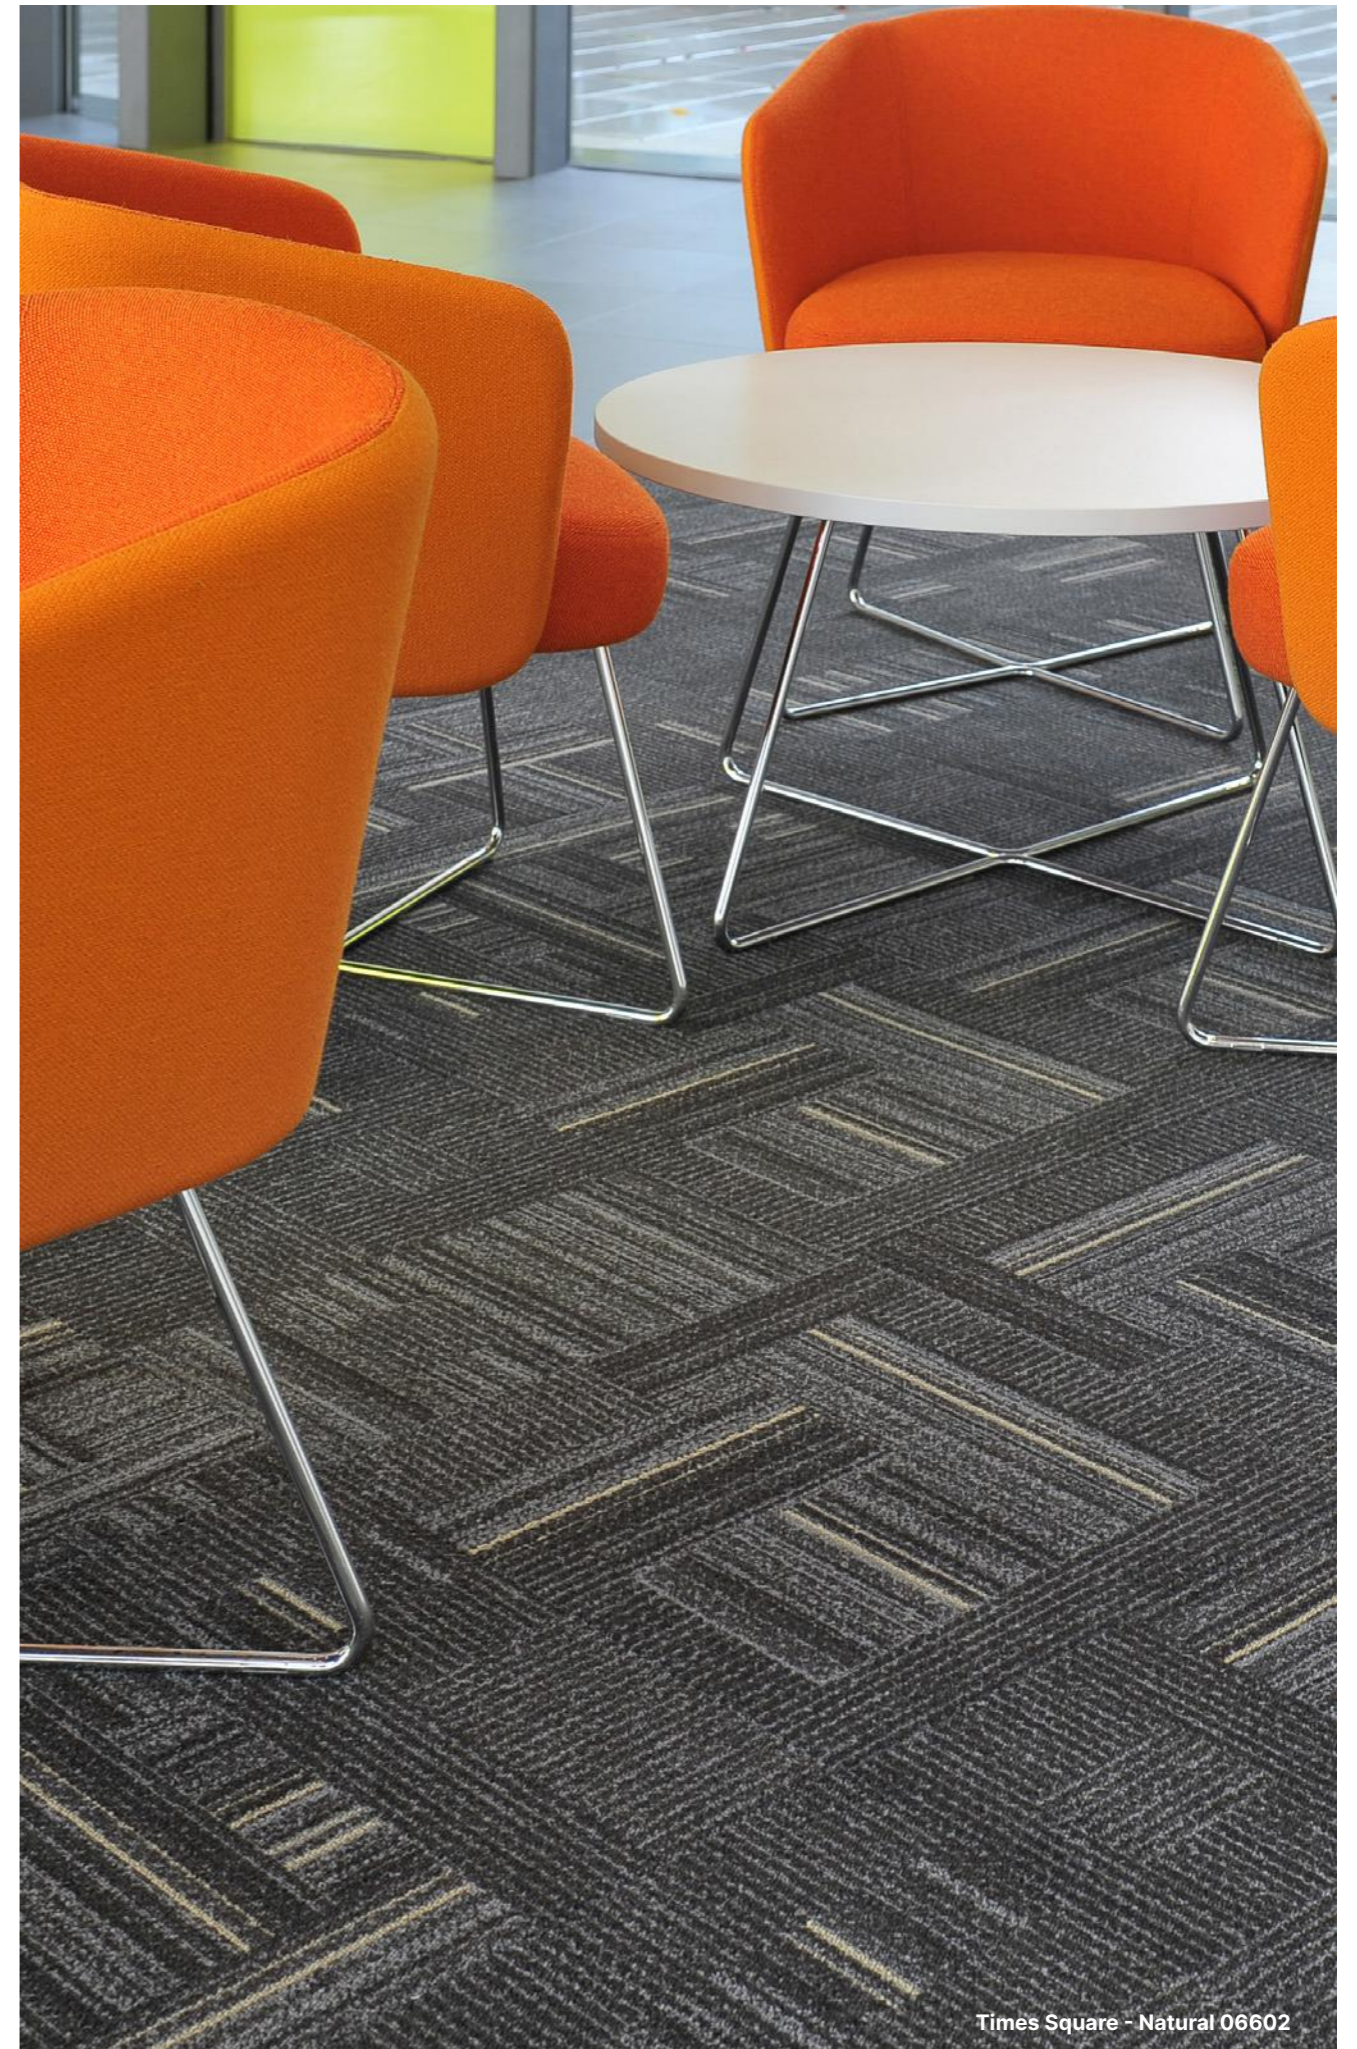

Times Square - Natural 06602

Carezone

Impervious Carpet


Premium Collection

- > Suitable for care homes, care facilities and residential living
- > Colours can be combined to create a coordinated floor scheme
- > Contains BI-OME® Medical anti-microbial treatment
- > Easy to clean and maintain

Textured Loop



Warm Stone
Textured Loop 07115 Y: 18.75




Barley Mist
Textured Loop 07120 Y: 19.56



Soft Taupe
Textured Loop 07116 Y: 16.04



Natural Truffle
Textured Loop 07117 Y: 9.96



Silver Sky
Textured Loop 07119 Y: 14.20




Rich Granite
Textured Loop 07118 Y: 4.75

Cut Pile



Warm Stone
Cut Pile 07101 Y: 22.40



Barley Mist
Cut Pile 07114 Y: 19.48




Soft Taupe
Cut Pile 07102 Y: 18.70




Natural Truffle
Cut Pile 07103 Y: 11.89




Silver Sky
Cut Pile 07113 Y: 11.06



Rich Granite
Cut Pile 07104 Y: 5.32




Natural Hessian
Cut Pile 07109 Y: 16.02




Lilac Heather
Cut Pile 07107 Y: 12.37



Autumn Leaves
Cut Pile 07106 Y: 10.45



Deep Blue
Cut Pile 07112 Y: 5.94



Velvet Damson
Cut Pile 07108 Y: 4.04

Specification:	Textured Loop	Cut Pile
Product Dimensions	2 metres or 4 metres	2 metres or 4 metres
Product Construction	Tufted Loop Pile	Tufted Cut Pile
Surface Yarn	100% Polypropylene	100% Polypropylene
Total Carpet Weight	2850 g/m ²	3125 g/m ²
Tufted Pile Weight	960 g/m ²	1050 g/m ²
Primary Backing	Woven Polypropylene	Woven Polypropylene
Secondary Backing	Aquabac Impervious	Aquabac Impervious
Total Carpet Thickness	8.5mm	10mm

For full specification information visit www.gerflor.co.uk



Y = Light Reflectance Value (LRV)



The Dementia Services Development Centre at the University of Stirling have undertaken a review of the Carezone range and have rated its design in relation to dementia design principles and its usability within a dementia-inclusive environment.


All Carezone colours are rated as Class 1a and are suitable for use in dementia applications. For an environment to be considered 'dementia-inclusive' careful consideration must be given to the specification of adjacent finishes with a maximum contrast of 10 points LRV between adjacent floor surfaces.

Carezone - Natural Truffle Cut Pile 07103 shown with Taralay Impression Control


Premium Collection

- > Suitable for commercial office environments
- > Colours can be combined to create a coordinated floor scheme
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Complements Creation 55 Looseley LVT

Plains



Bank 01313 Y: 9.02




Euston 01314 Y: 9.12

Stripes



Central Line 01355

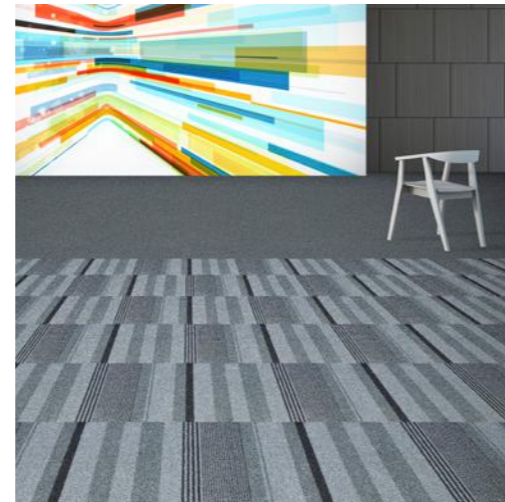

SqMile Exec - Stripes Central Line 01355 and Plains Westminster 01315



Westminster 01315 Y: 5.61




Farringdon 01310 Y: 1.80



District Line 01366

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Cut Pile
Surface Yarn	ECONYL® Regenerated SDN
Total Carpet Weight	5147 g/m ²
Tufted Pile Weight	1100 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	8.7mm

For full specification information visit www.gerflor.co.uk

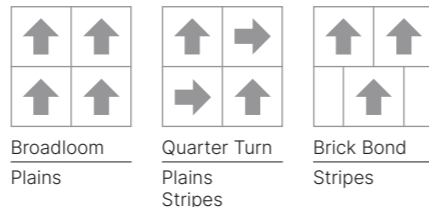

Premium Collection


- > Suitable for commercial office and education environments
- > A range of feature colours to complement other carpet ranges
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Complements Urban Myth, Streetwise Design, Cityscene & Brickworks and Lafite Connect



Gold
Loop Pile 101 Y: 25.24
Cut Pile 777 Y: 24.85




Orange
Loop Pile 102 Y: 16.36
Cut Pile 666 Y: 15.31




Red
Loop Pile 103 Y: 7.75
Cut Pile 555 Y: 7.38



Green
Loop Pile 104 Y: 18.50
Cut Pile 444 Y: 18.10



Sky
Loop Pile 105 Y: 24.46
Cut Pile 333 Y: 24.77



Blue
Loop Pile 106 Y: 4.93
Cut Pile 222 Y: 4.56




Emphasis - Green 104 with Cityscene - Shale 06106 and Brickworks - Tonbridge 06711

Emphasis should only be used as an accent colour to complement other product ranges. Emphasis should not be used as a field colour or in areas of heavy traffic such as doorway thresholds.

Specification:	Loop Tile	Cut Tile
Product Dimensions	500mm x 500mm	500mm x 500mm
Product Construction	Tufted Loop Pile	Tufted Cut Pile
Surface Yarn	ECONYL® Regenerated SDN	ECONYL® Regenerated SDN
Total Carpet Weight	4200 g/m ²	4350 g/m ²
Tufted Pile Weight	615 g/m ²	750 g/m ²
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen	Bitumen
Total Carpet Thickness	6.8mm	7.5mm

For full specification information visit www.gerflor.co.uk




Stratus

Carpet Tile


Premium Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Complements Streetwise Design and Stratus Stripe

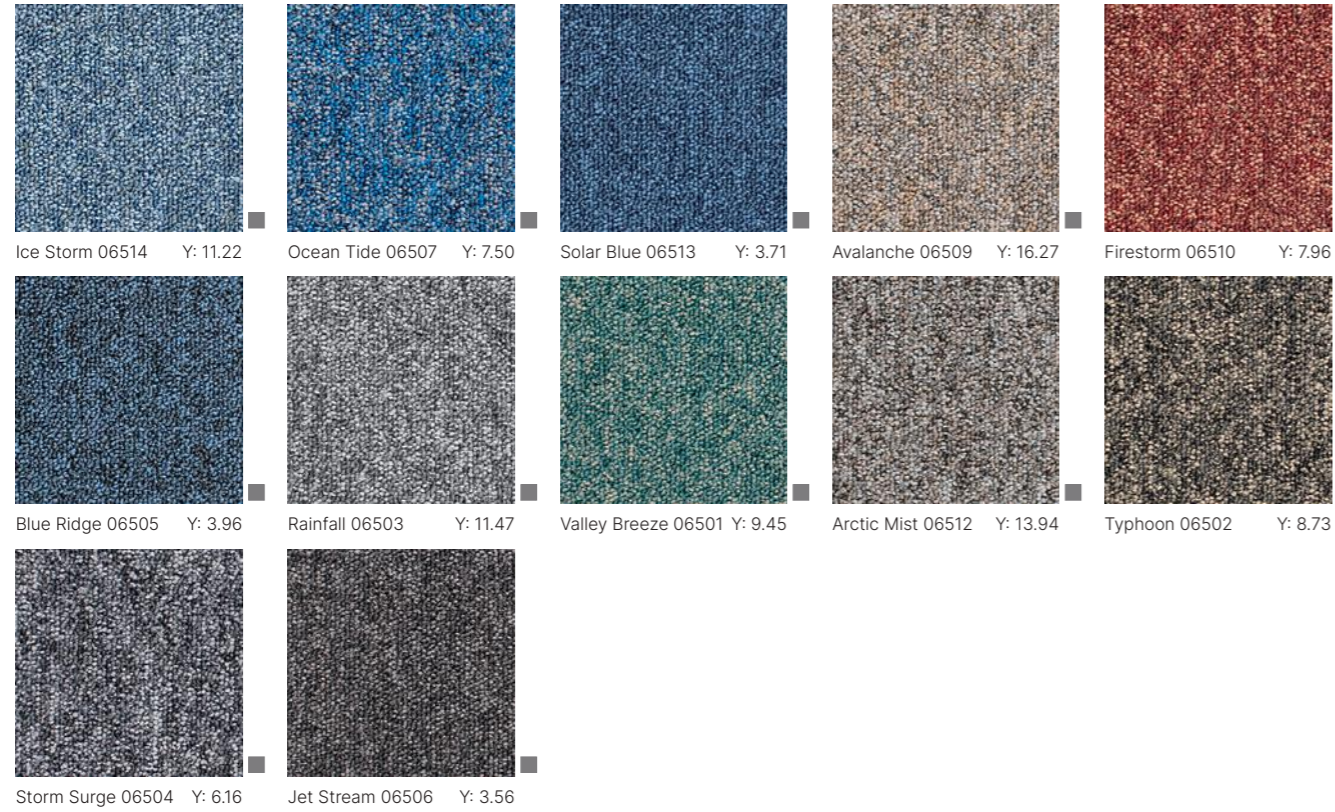

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	ECONYL® Regenerated SDN
Total Carpet Weight	4585 g/m ²
Tufted Pile Weight	615 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	6.8mm

For full specification information visit www.gerflor.co.uk




Stratus Stripe

Carpet Tile

Premium Collection

- > Suitable for commercial office and education environments
- > Ideal for creating zones and feature areas
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Complements Stratus and Emphasis

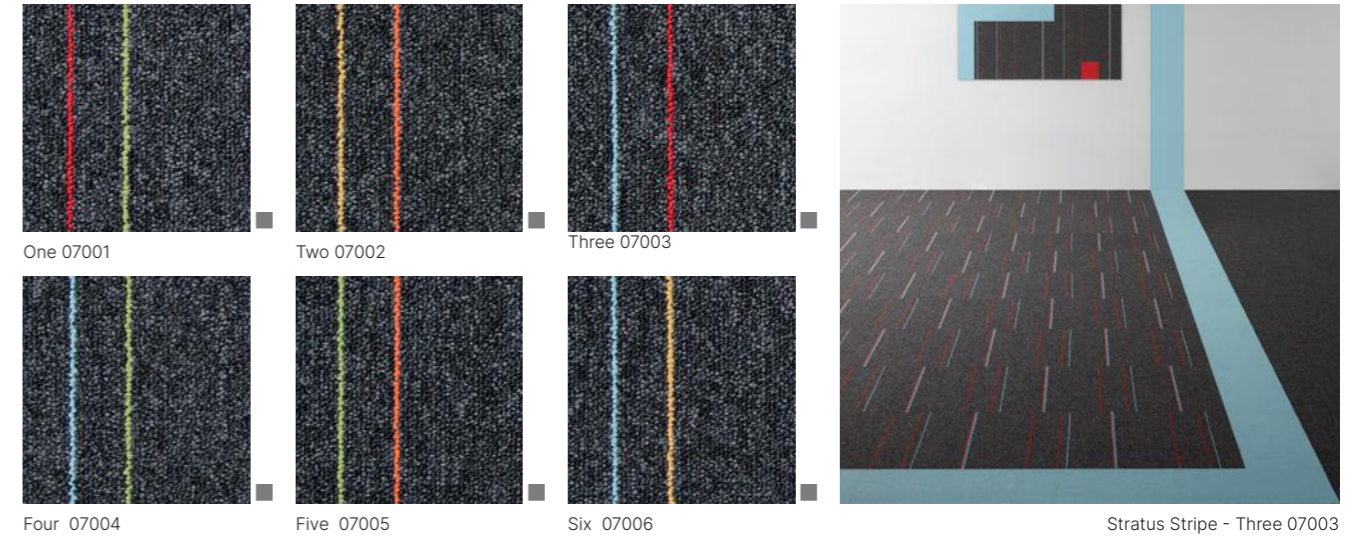

Stratus

Ideal as a field tile, page 158



Jet Stream

Emphasis


Ideal for accents and features to create interest, page 157



Gold Orange Red Green Sky

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	ECONYL® Regenerated SDN
Total Carpet Weight	4585 g/m ²
Tufted Pile Weight	615 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	6.8mm

For full specification information visit www.gerflor.co.uk





Adventurer

Carpet Tile & Impervious


Premium Collection

- > Suitable for commercial office, education and healthcare environments
- > Combines style with outstanding performance
- > Ideal for heavy traffic environments
- > Seamless appearance when installed

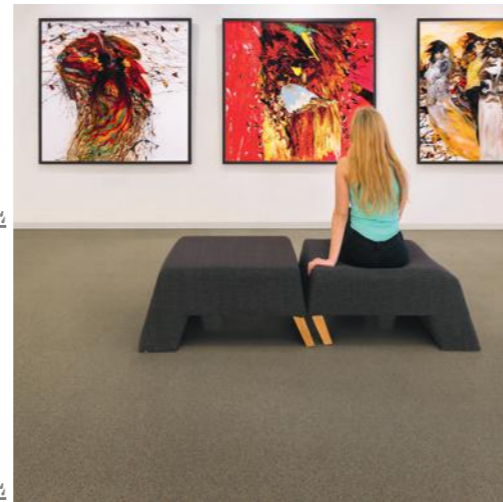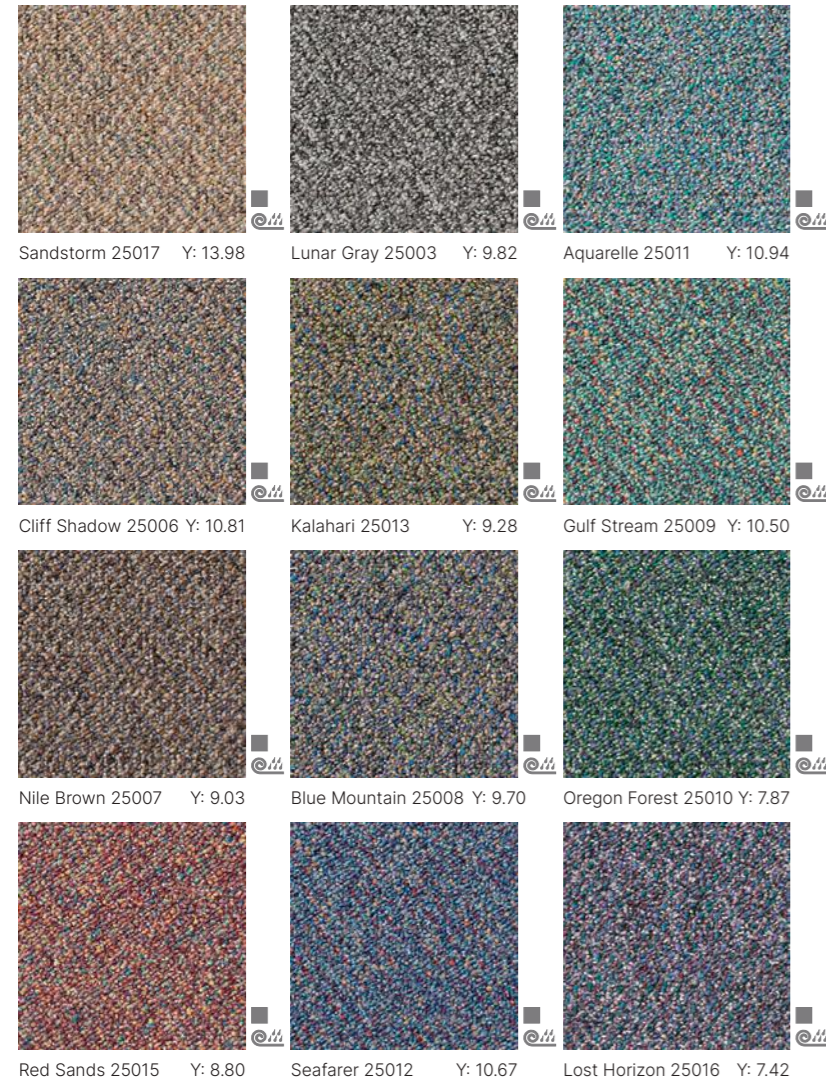

Adventurer - Sandstorm 25017

Specification:	Tile	Pvc Impervious
Product Dimensions	500mm x 500mm	2 metres
Product Construction	Tufted Loop Pile	Tufted Loop Pile
Surface Yarn	100% Solution Dyed Nylon	100% Solution Dyed Nylon
Total Carpet Weight	4380 g/m ²	4380 g/m ²
Tufted Pile Weight	500 g/m ²	500 g/m ²
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen	pvc
Total Carpet Thickness	6.2mm	6.9mm



Broadloom Quarter Turn

For full specification information visit www.gerflor.co.uk



Genus & Volnay

Carpet Tile, Broadloom & Impervious


Premium Collection

- > Suitable for commercial office, education and healthcare environments
- > Available in tile, broadloom and impervious formats
- > Excellent performance and ideal for heavy traffic environments
- > Easy to clean and maintain

Genus




Volnay

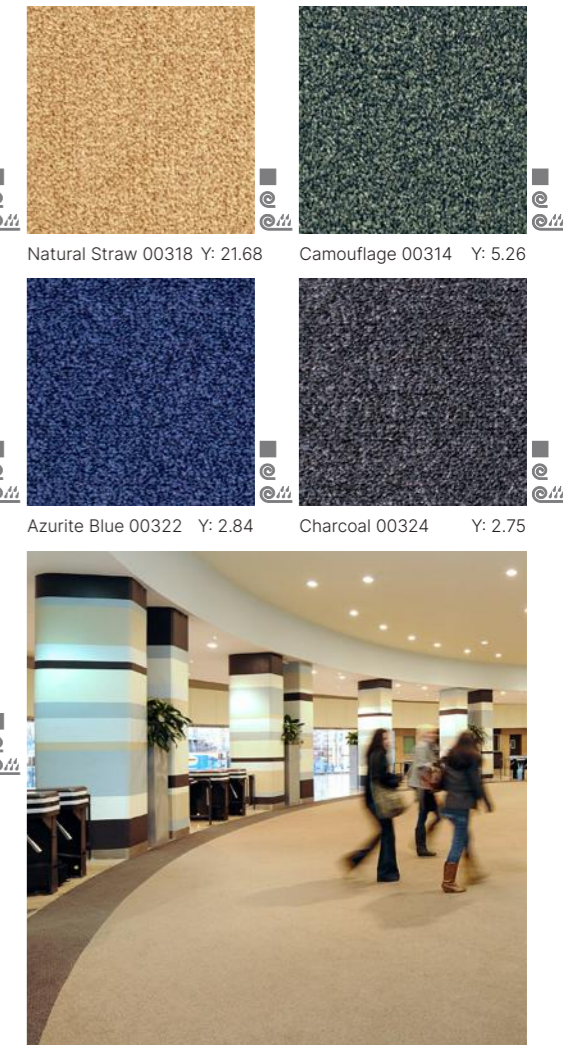

Genus - Cornfield 00225

Specification:	Tile	Broadloom	Pvc Impervious
Product Dimensions	500mm x 500mm	4 metres	2 metres
Product Construction	Tufted Cut Pile	Tufted Cut Pile	Tufted Cut Pile
Surface Yarn	100% Marquésa SD	100% Marquésa SD	100% Marquésa SD
Total Carpet Weight	4375 g/m ²	2366 g/m ²	4605 g/m ²
Tufted Pile Weight	1085 g/m ²	1085 g/m ²	1085 g/m ²
Primary Backing	Non-woven	Woven Polypropylene	Non-woven
Secondary Backing	Bitumen	Woven Polypropylene	pvc
Total Carpet Thickness	9mm	8mm	8mm



Broadloom Quarter Turn

For full specification information visit www.gerflor.co.uk




Latour² Carpet Tile


High Performance Contractor Collection

- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Constructed from 100% Aquafil Solution Dyed Nylon yarn
- > Excellent performance and ideal for heavy traffic environments

Plains

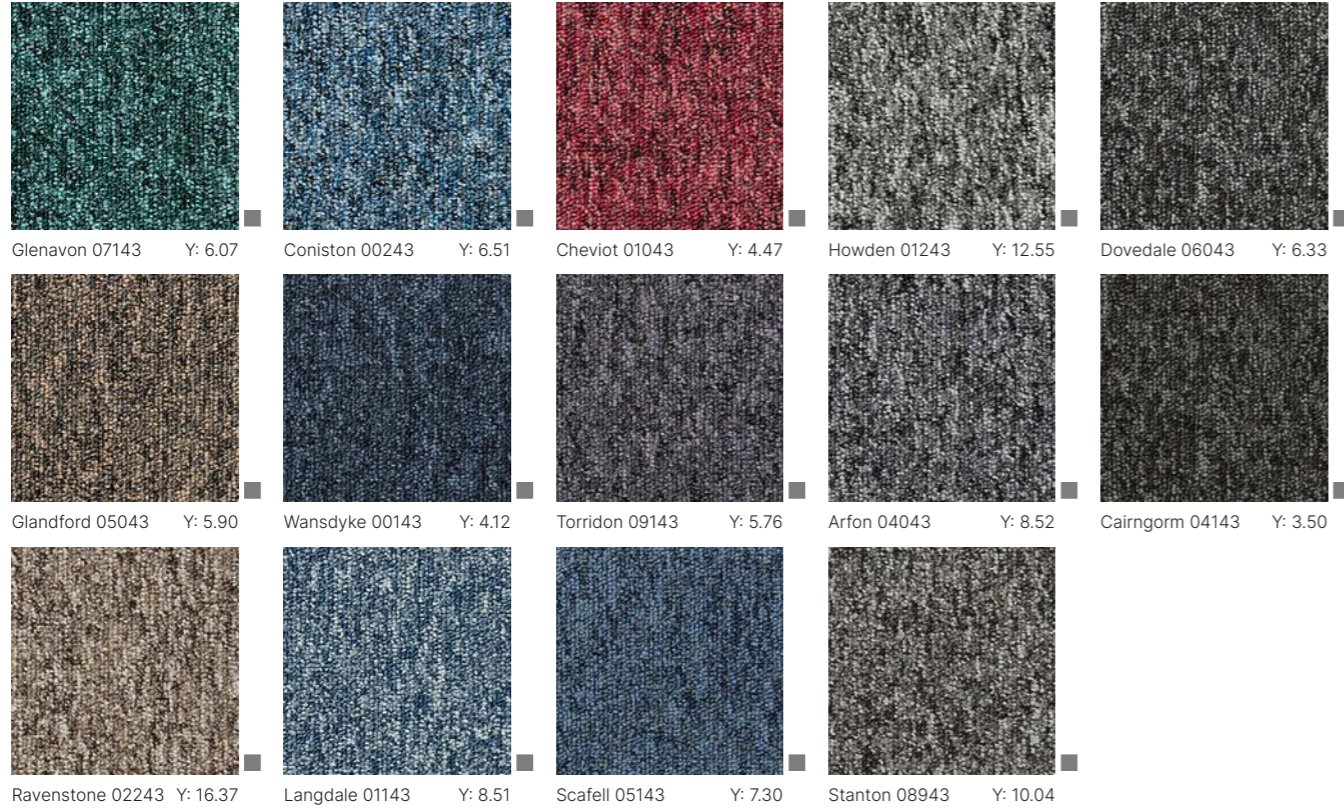

Stripes

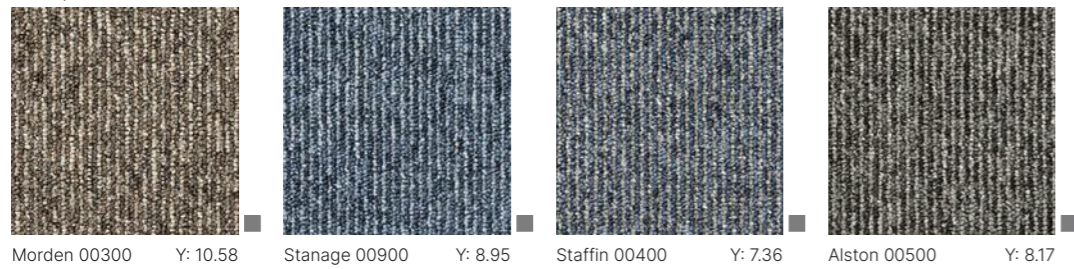


Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Aquafil Solution Dyed Nylon
Total Carpet Weight	4320 g/m ²
Tufted Pile Weight	470 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	5.5mm
For full specification information visit www.gerflor.co.uk	



Broadloom
Plains



Quarter Turn
Plains
Stripes

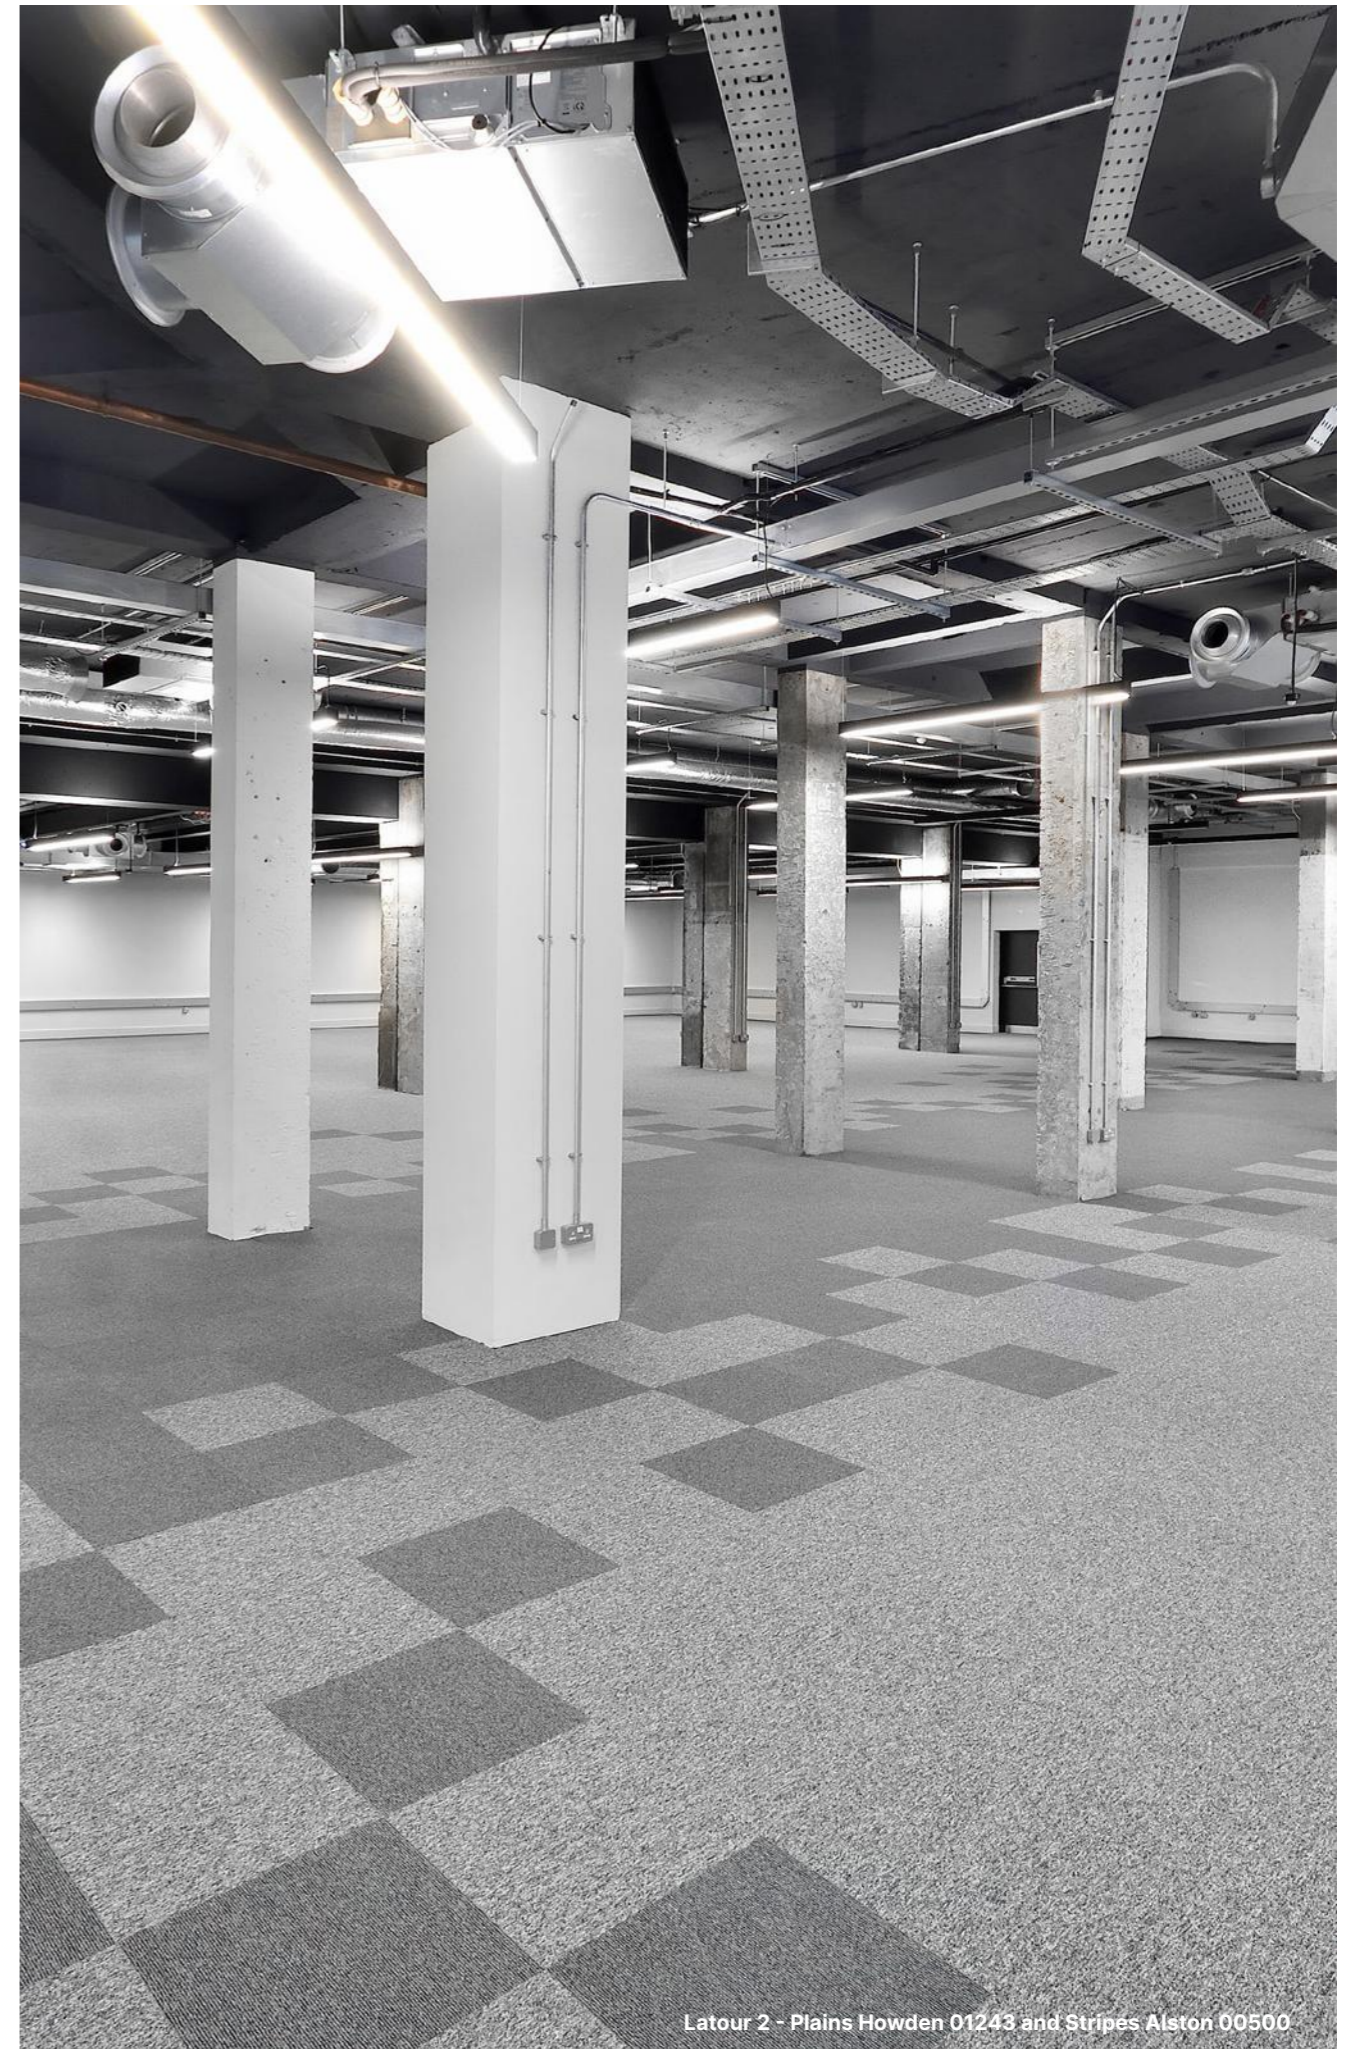

Latour 2 - Plains Howden 01243 and Stripes Alston 00500


Lafite Connect

Carpet Tile

High Performance Contractor Collection


- > Suitable for commercial office and education environments
- > Fusion tiles create a seamless transition feature across areas of your room such as walkways and seating plans
- > Ideal for creating zones, feature areas and transitions across the floor
- > Complements Lafite Space

Fusion

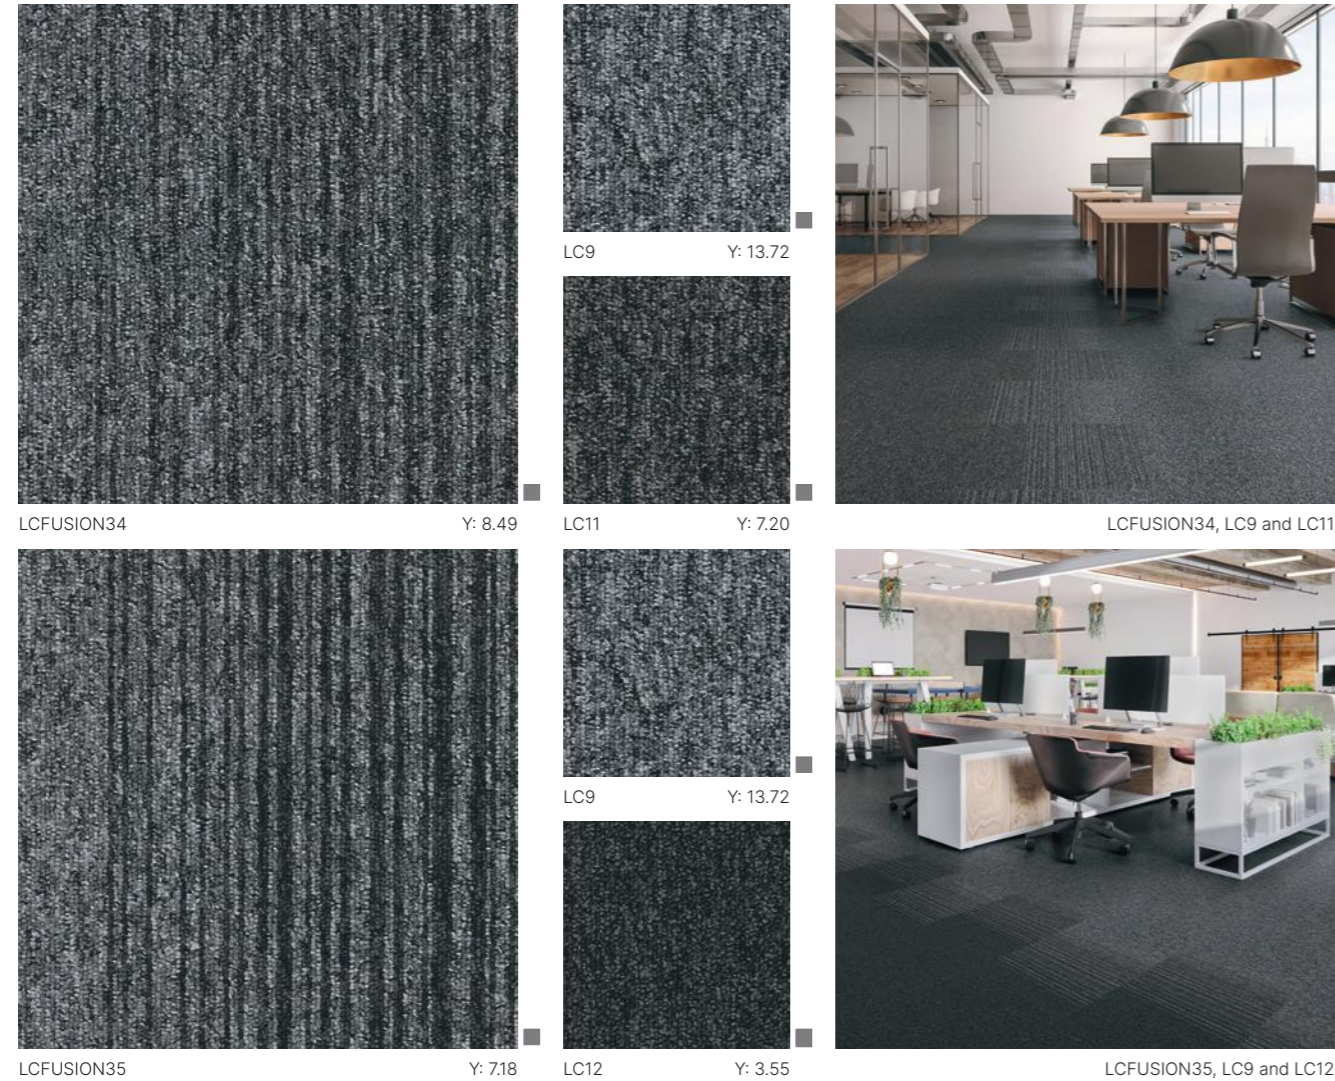


Plains

Stripes

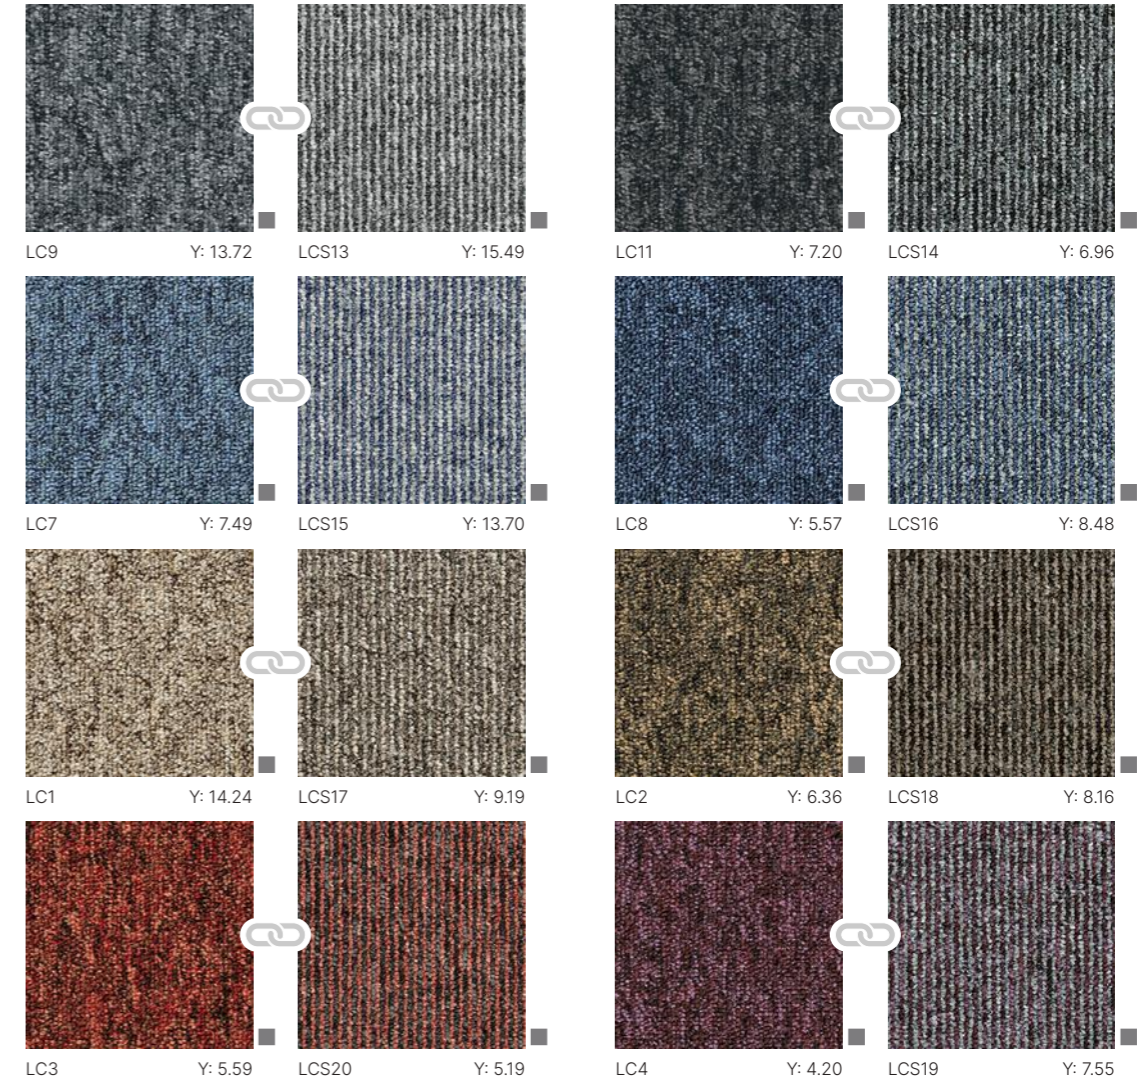

Specification:	Fusion, Plains & Stripes
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Aquafil Solution Dyed Nylon
Total Carpet Weight	4415 g/m ²
Tufted Pile Weight	540 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	5.9mm

For full specification information visit www.gerflor.co.uk

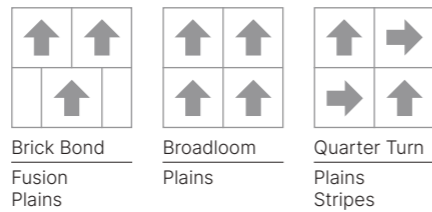

Plains and Stripes can be used to define spaces by connecting tones and colours to create a contrast between areas of your floor.



LC7 and LCS15


Lafite Space

Carpet Tile & Plank

High Performance Contractor Collection


- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating zones and transitions across the floor
- > Complements Lafite Connect

Tile

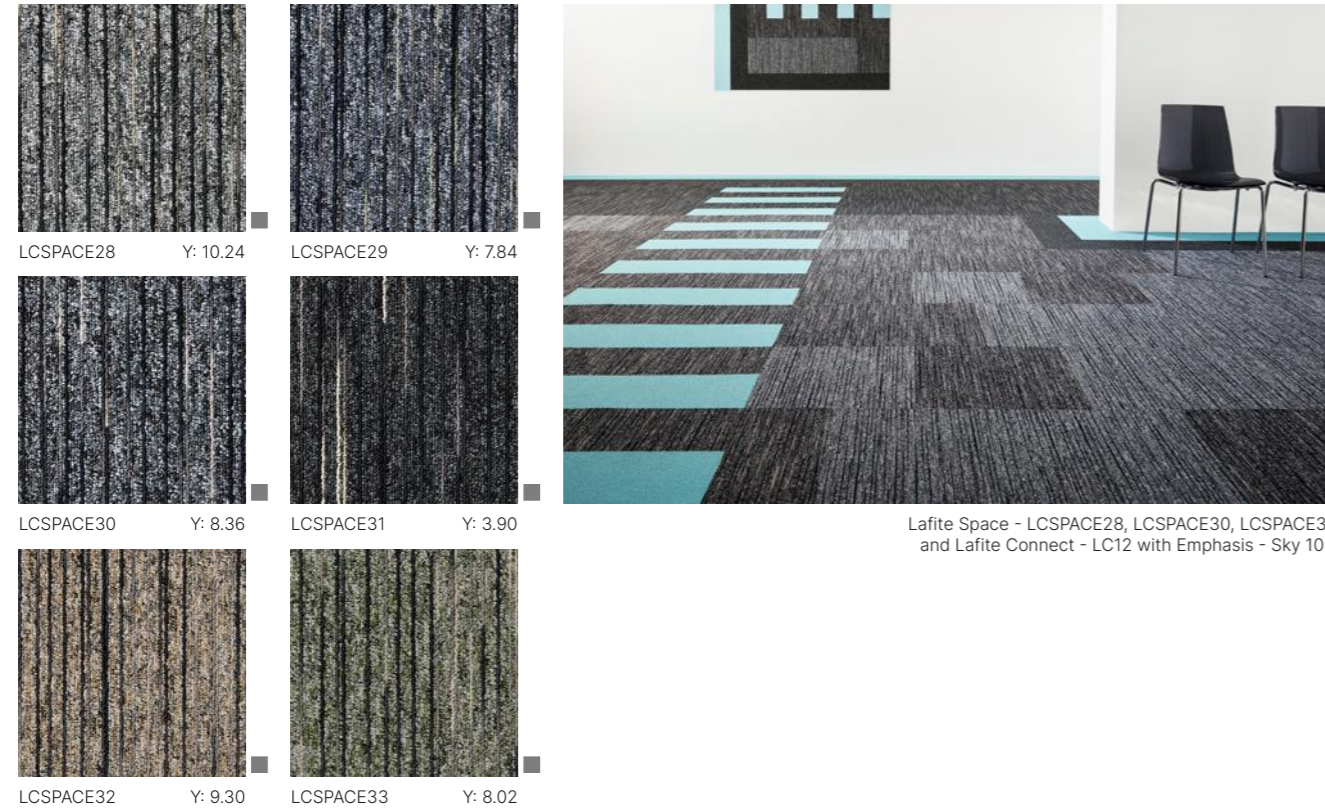

Lafite Space - LCSPACE28, LCSPACE30, LCSPACE31 and Lafite Connect - LC12 with Emphasis - Sky 105


Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	Solution Dyed Nylon & Space Dyed Nylon
Total Carpet Weight	4415 g/m ²
Tufted Pile Weight	540 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	5.9mm
For full specification information visit www.gerflor.co.uk	



Quarter Turn


Brick Bond

Plank

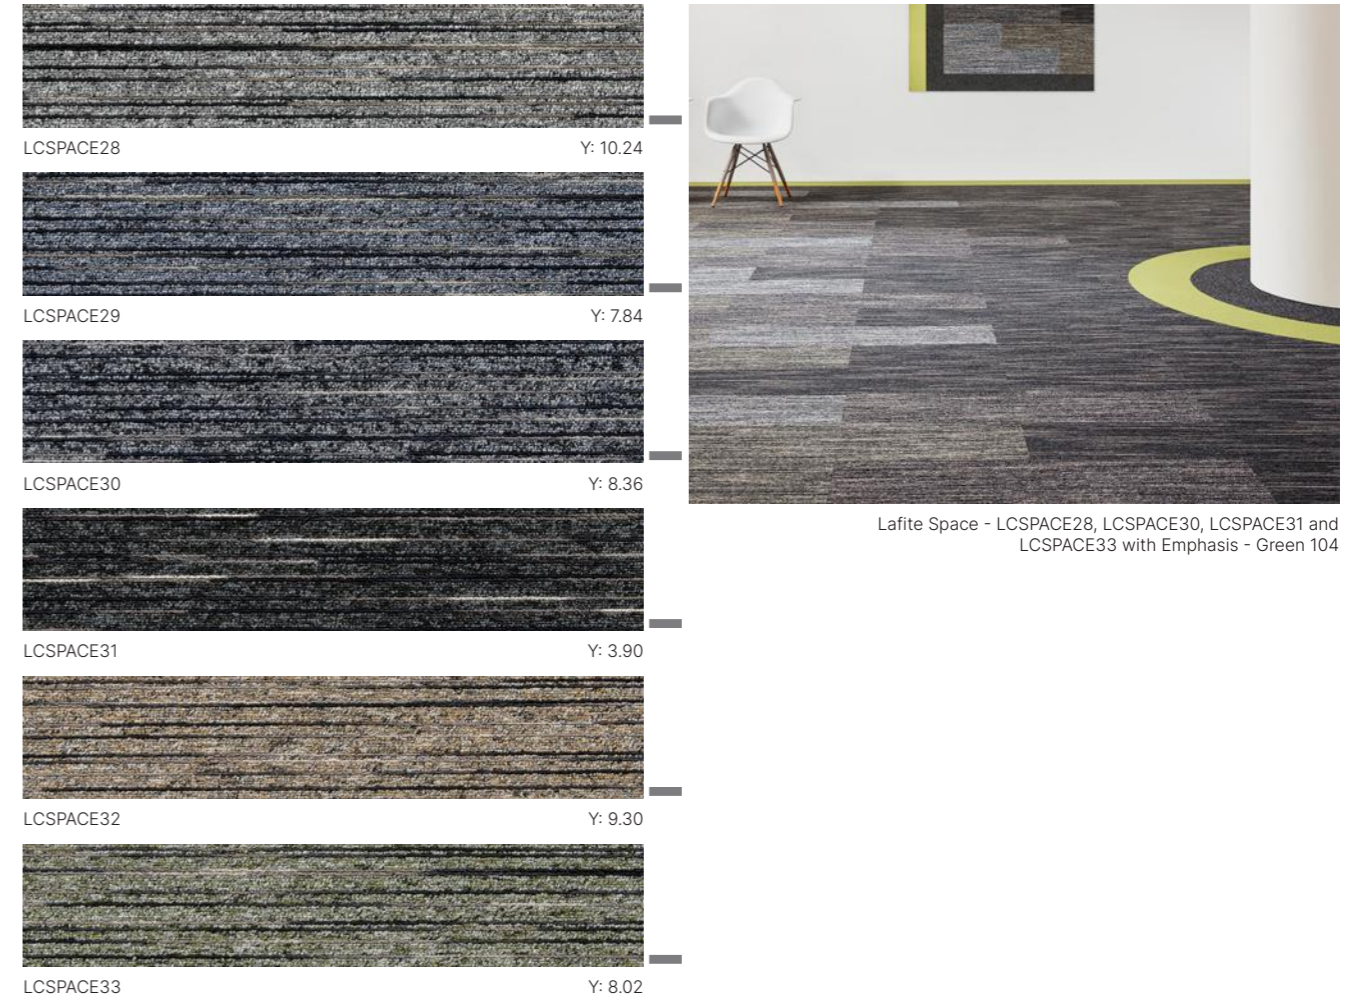

Lafite Space - LCSPACE28, LCSPACE30, LCSPACE31 and LCSPACE33 with Emphasis - Green 104

Specification:	Plank
Product Dimensions	250mm x 1000mm
Product Construction	Tufted Loop Pile
Surface Yarn	Solution Dyed Nylon & Space Dyed Nylon
Total Carpet Weight	4415 g/m ²
Tufted Pile Weight	540 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	5.9mm
For full specification information visit www.gerflor.co.uk	



Herringbone



Half Drop

Lafite Plains

Carpet Tile

High Performance Contractor Collection


- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Ideal for creating zones, feature areas and transitions across the floor
- > Complements Lafite Space

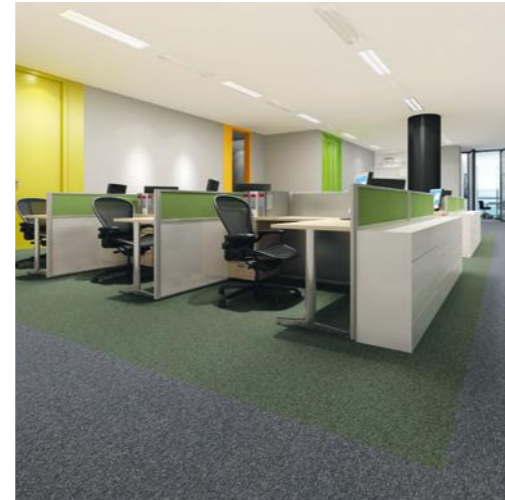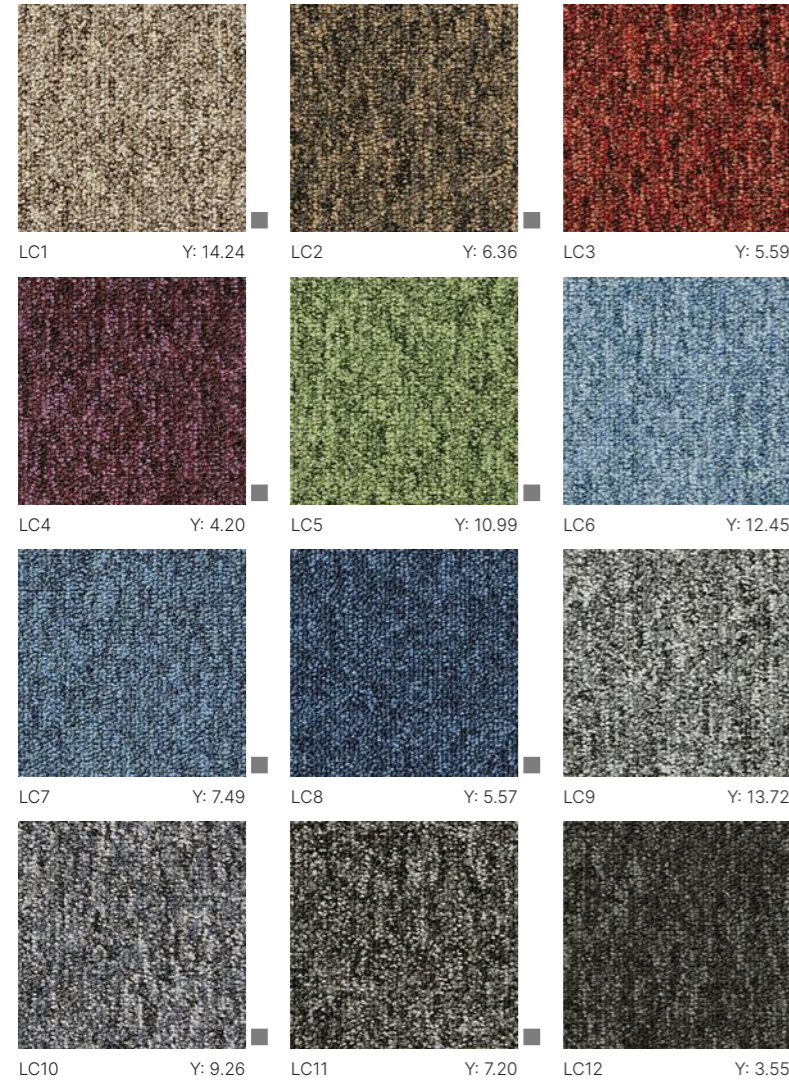

Lafite Plains - LC5 with LC9

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Aquafil Solution Dyed Nylon
Total Carpet Weight	4415 g/m ²
Tufted Pile Weight	540 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	5.9mm

For full specification information visit www.gerflor.co.uk



Predator

Carpet Tile

High Performance Contractor Collection


- > Suitable for commercial office and education environments
- > Colours can be combined to create a coordinated floor scheme
- > Excellent performance and ideal for heavy traffic environments
- > Seamless appearance when installed



Predator - Osprey 03324, Hawk 03316, Lynx 03322, Piranha

Specification:	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	ECONYL® Regenerated SDN
Total Carpet Weight	4400 g/m ²
Tufted Pile Weight	525 g/m ²
Primary Backing	Non-woven
Secondary Backing	Bitumen
Total Carpet Thickness	6.5mm

For full specification information visit www.gerflor.co.uk




Bodega

Carpet Tile & Broadloom


High Performance Contractor Collection

- > Suitable for commercial office, education and healthcare environments
- > Available in tile and broadloom formats
- > Excellent performance and ideal for circulation areas
- > Easy to clean and maintain

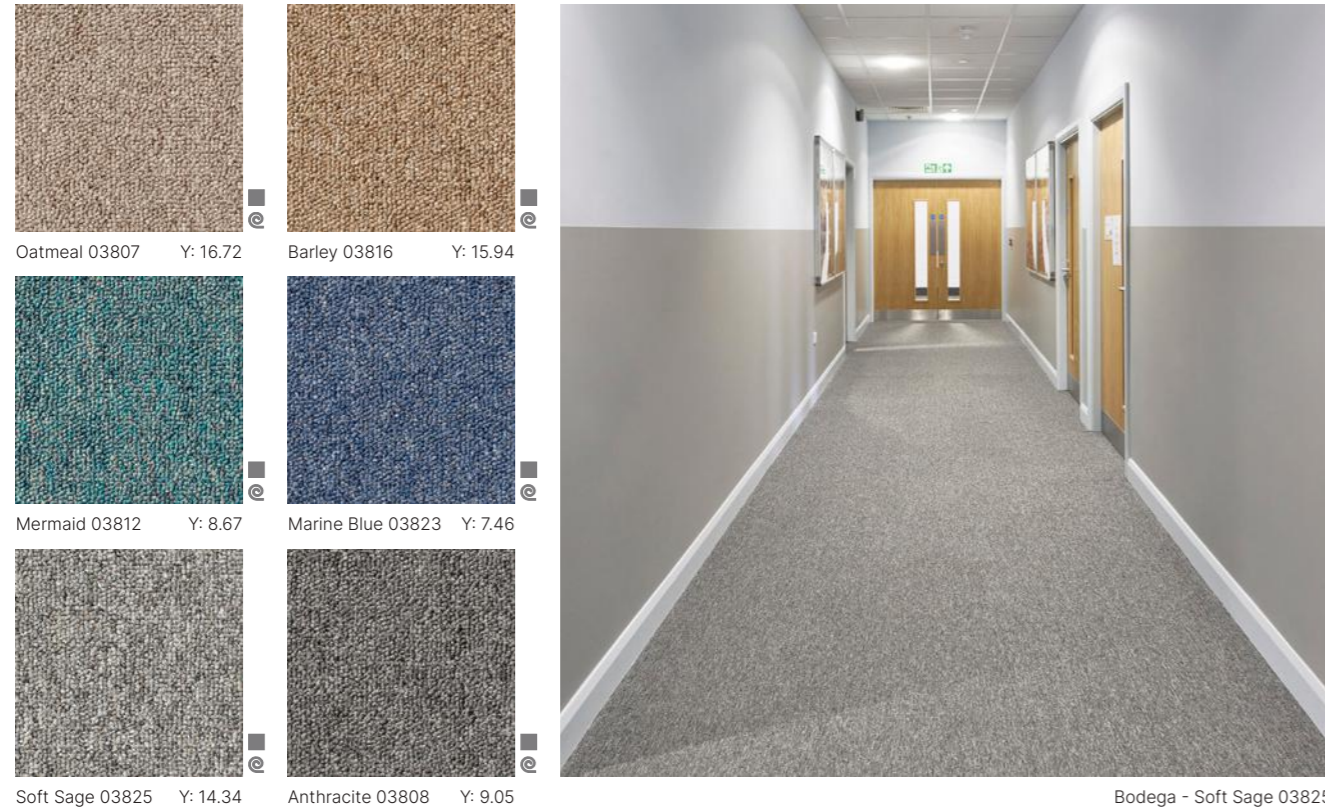

Specification:	Tile	Broadloom
Product Dimensions	500mm x 500mm	4 metres
Product Construction	Tufted Loop Pile	Tufted Loop Pile
Surface Yarn	100% Polypropylene	100% Polypropylene
Total Carpet Weight	4500 g/m ²	1906 g/m ²
Tufted Pile Weight	678 g/m ²	678 g/m ²
Primary Backing	Non-woven	Woven Polypropylene
Secondary Backing	Bitumen	Woven Polypropylene
Total Carpet Thickness	6mm	6mm

For full specification information visit www.gerflor.co.uk




Boulevard 7000

Matting

Secondary Barrier Matting

- > Suitable for commercial office, education and healthcare environments
- > Constructed from 100% Solution Dyed Nylon yarn
- > Incorporates a scraper fibre for optimum dirt removal and moisture retention
- > A solution for internal entrances and access points or any area prone to soil and moisture (not recommended on staircases)

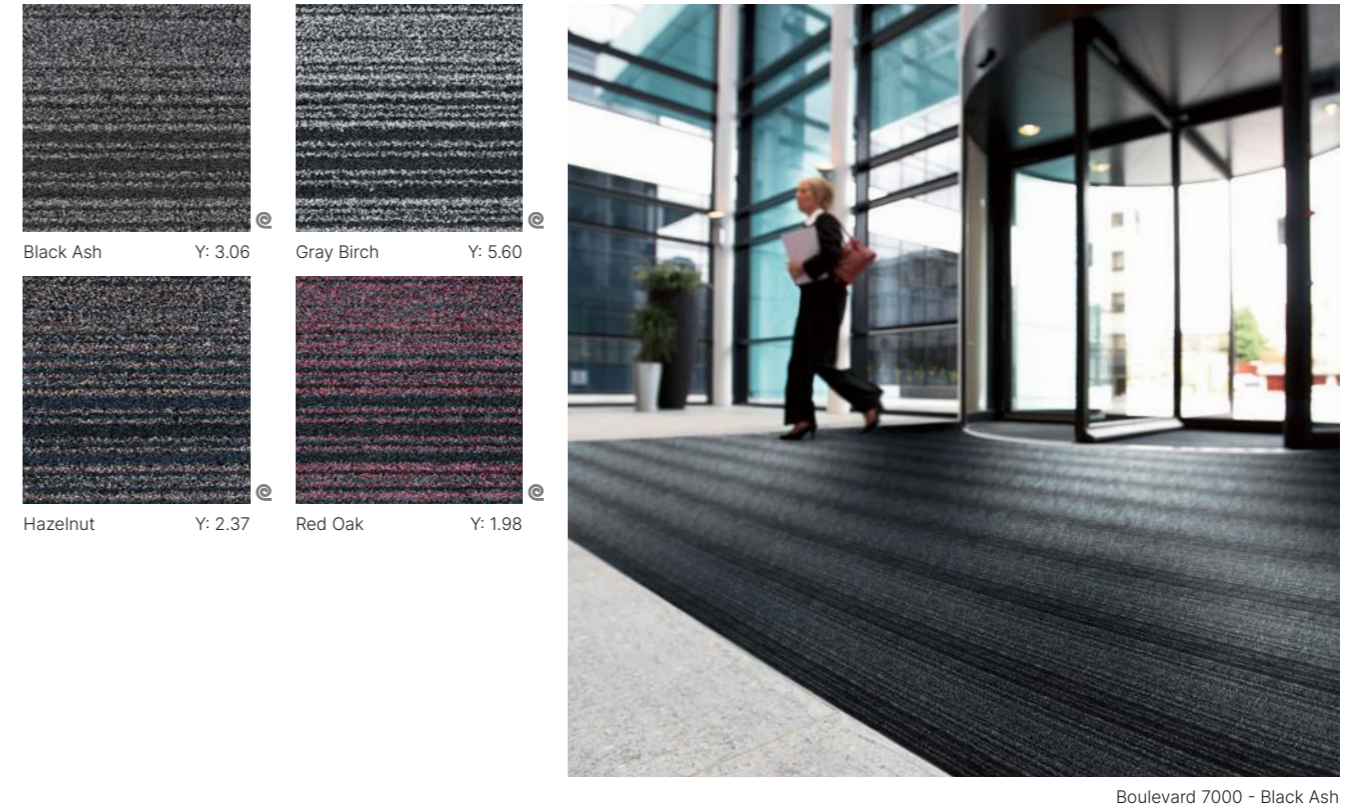

Specification:	Sheet
Product Dimensions	+/- 20m x 2m
Product Construction	Tufted Cut Pile
Surface Yarn	100% Solution Dyed Nylon
Total Carpet Weight	+/- 3525 g/m ²
Tufted Pile Weight	+/- 825 g/m ²
Primary Backing	Non-woven Polyester/Polyamide
Secondary Backing	pvc
Total Carpet Thickness	+/- 8mm


For full specification information visit www.gradus.com

Boulevard Stripe

Matting

Secondary Barrier Matting

- > Suitable for commercial office, education and healthcare environments
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Incorporates a scraper fibre for optimum dirt removal and moisture retention
- > A solution for internal entrances and access points or any area prone to soil and moisture (not recommended on staircases)

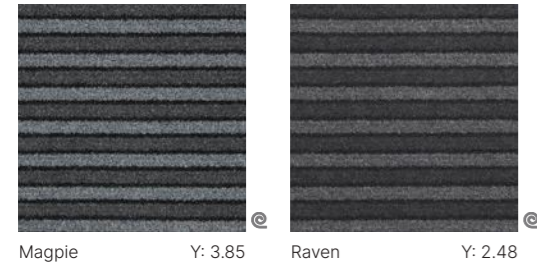

Boulevard Stripe - Magpie and Boulevard 5000 - Cuckoo with Times Square - Lime 06606

Specification:	Sheet
Product Dimensions	25m x 2m
Product Construction	Tufted Cut Pile
Surface Yarn	ECONYL® Regenerated SDN
Total Carpet Weight	4300 g/m ²
Tufted Pile Weight	800 g/m ²
Primary Backing	Non-woven
Secondary Backing	pvc
Total Carpet Thickness	9mm



For full specification information visit www.gradus.com

Boulevard 6000

Matting

Secondary Barrier Matting

- > Suitable for commercial office, education and healthcare environments
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Incorporates a scraper fibre for optimum dirt removal and moisture retention
- > A solution for internal entrances and access points or any area prone to soil and moisture

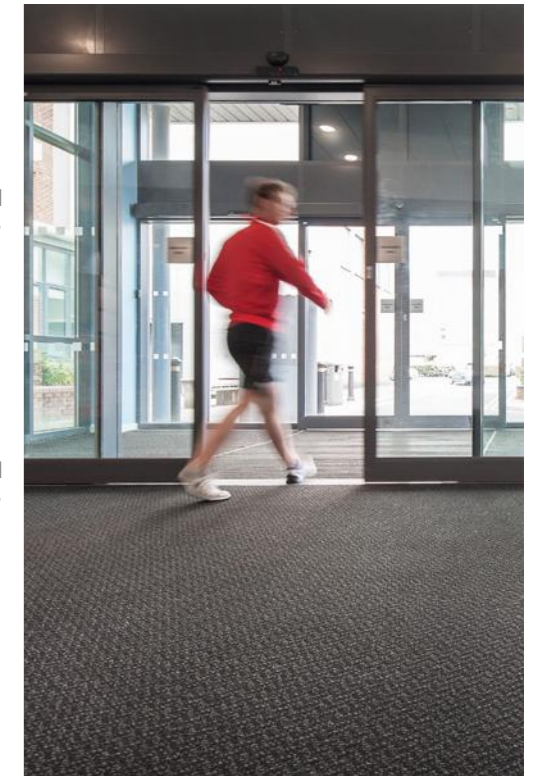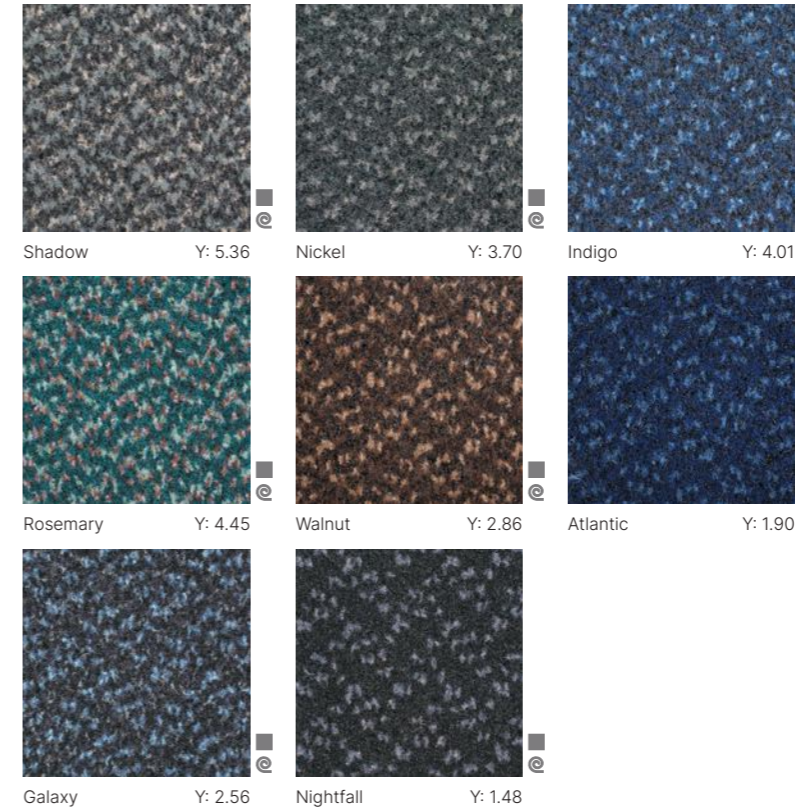

Boulevard 6000 - Nightfall

Specification:	Tile	Sheet
Product Dimensions	500mm x 500mm	25m x 2m
Product Construction	Tufted Cut Pile	Tufted Cut Pile
Surface Yarn	ECONYL® Regenerated SDN	ECONYL® Regenerated SDN
Total Carpet Weight	4750 g/m ²	4750 g/m ²
Tufted Pile Weight	950 g/m ²	950 g/m ²
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen	pvc
Total Carpet Thickness	9mm	8mm

For full specification information visit www.gradus.com



Broadloom

Boulevard 5000

Matting

Secondary Barrier Matting

- > Suitable for commercial office, education and healthcare environments
- > Constructed from ECONYL® Regenerated Solution Dyed Nylon yarn
- > Incorporates a scraper fibre for optimum dirt removal and moisture retention
- > A solution for internal entrances and access points or any area prone to soil and moisture



Boulevard 5000 - Redpoll with Times Square - Red 06605

Specification:	Tile	Sheet
Product Dimensions	500mm x 500mm	25m x 2m
Product Construction	Tufted Cut Pile	Tufted Cut Pile
Surface Yarn	ECONYL® Regenerated SDN	ECONYL® Regenerated SDN
Total Carpet Weight	4600 g/m ²	4600 g/m ²
Tufted Pile Weight	800 g/m ²	800 g/m ²
Primary Backing	Non-woven	Non-woven
Secondary Backing	Bitumen	pvc
Total Carpet Thickness	8mm	7.5mm

For full specification information visit www.gradus.com




Broadloom

Boulevard 1500

Matting

Secondary Barrier Matting

- > Suitable for education and healthcare environments
- > Constructed from 100% Polypropylene yarn
- > Features a ribbed design which provides resistance to compression
- > A solution for internal entrances and access points or any area prone to soil and moisture

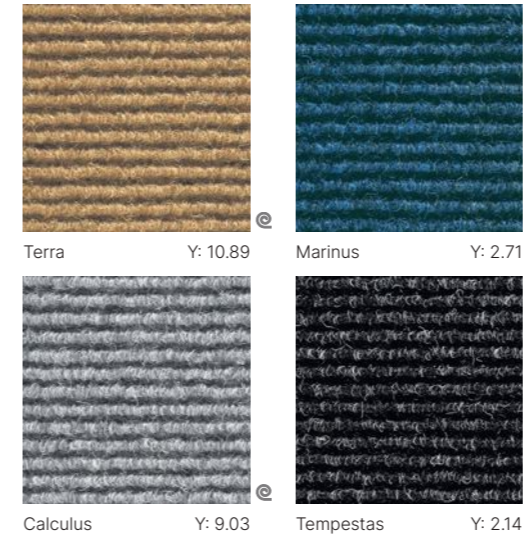

Boulevard 1500 - Terra

Specification:	Sheet
Product Dimensions	15m x 2m
Product Construction	Needlepunch
Surface Yarn	100% Polypropylene
Total Carpet Weight	3000 g/m ²
Tufted Pile Weight	1600 g/m ²
Backing	Rubber
Total Carpet Thickness	9mm

For full specification information visit www.gradus.com

Fast Track Flooring Tiles

GTI Max is an ideal solution for heavy traffic applications and are popular choices for retail, industrial and warehousing environments. A fast renovation solution which can be installed over most existing floors where minimal sub floor preparation is required, as well as no adhesives. Cost effective solutions both in the installation (you do not need to stop production or close the premises) and in terms of easier maintenance (with PUR+ surface treatment).

Attraction® is a fast track easy solution with interlocking edges which allows for rapid loose lay installation and replacement. It is cost effective as there is no need to close down the premises and can be installed on a sub floor with minimal preparation. With an ProtecSol® 2 surface treatment it requires minimal maintenance and is a highly durable solution suitable for heavy traffic applications in the retail and industrial and many other markets.

Creation 70 Connect is fast track large format loose lay tile that overcomes the difficulty of many irregular sub-floors, making it ideal for refurbishments. Its resilient reinforced core offers dimensional stability and noise absorption whilst being comfortable underfoot. It comes in a range of popular designs and is suitable for medium traffic areas including specialist chains, shops, offices, education and public buildings.



Fast track flooring that saves you time money and inconvenience




			GTI Max	Attraction®	Creation 70 Connect
Description					
Thickness	EN ISO 24346	mm	6.0	5.0	5.0
Wear layer thickness	EN ISO 24340	mm	2.0	1.0	0.70
Weight	EN ISO 23997	g/m ²	9365	7460	8235
Size	EN ISO 24342	mm	635 × 635 (GTI Connect) 600 × 600 (Cleantech)*	635 × 635 (Connect) 600 × 600 (Cleantech)*	701.3 × 701.3
Classification					
Norm / Product specification	-	-	EN ISO 10582	EN ISO 10582	EN ISO 10582
European classification	EN ISO 10874	class	34 -43	34-43	34-43
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance wet	DIN 51 130	class	R10	R10	R10
Performances					
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	-	-	T	T	T
Type binder content	ISO 10582	type	I	I	I
Dimensional stability	EN ISO 23999	%	≤ 0.15	≤ 0.25	≤ 0.15
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25	0.25	0.25
Shore hardness D	EN ISO 868	HD	≥ 55	-	-
Impact sound insulation	EN ISO 717-2	dB	-	-	5
Colour fastness	EN 20 105-B02	degree	≥ 6	≥ 6	≥ 6
Chemical products resistance	EN ISO 26987	-	OK	OK	OK
Surface treatment	-	-	PUR+	ProtecSol® 2	PUR+ Matt
TVOC after 28 days	ISO 16000-6	µg/m ³	< 100	< 10	< 10
CE Marking					
CE	EN 14041				


* Cleantech version (without dovetail) available upon request

GTI Max

Fast Track Flooring Tiles

- > Tough and durable, suitable for high traffic in industrial areas
- > Interlocking tiles for fast installation and replacement of tiles
- > Low maintenance due to Polyurethane (PUR+) surface treatment

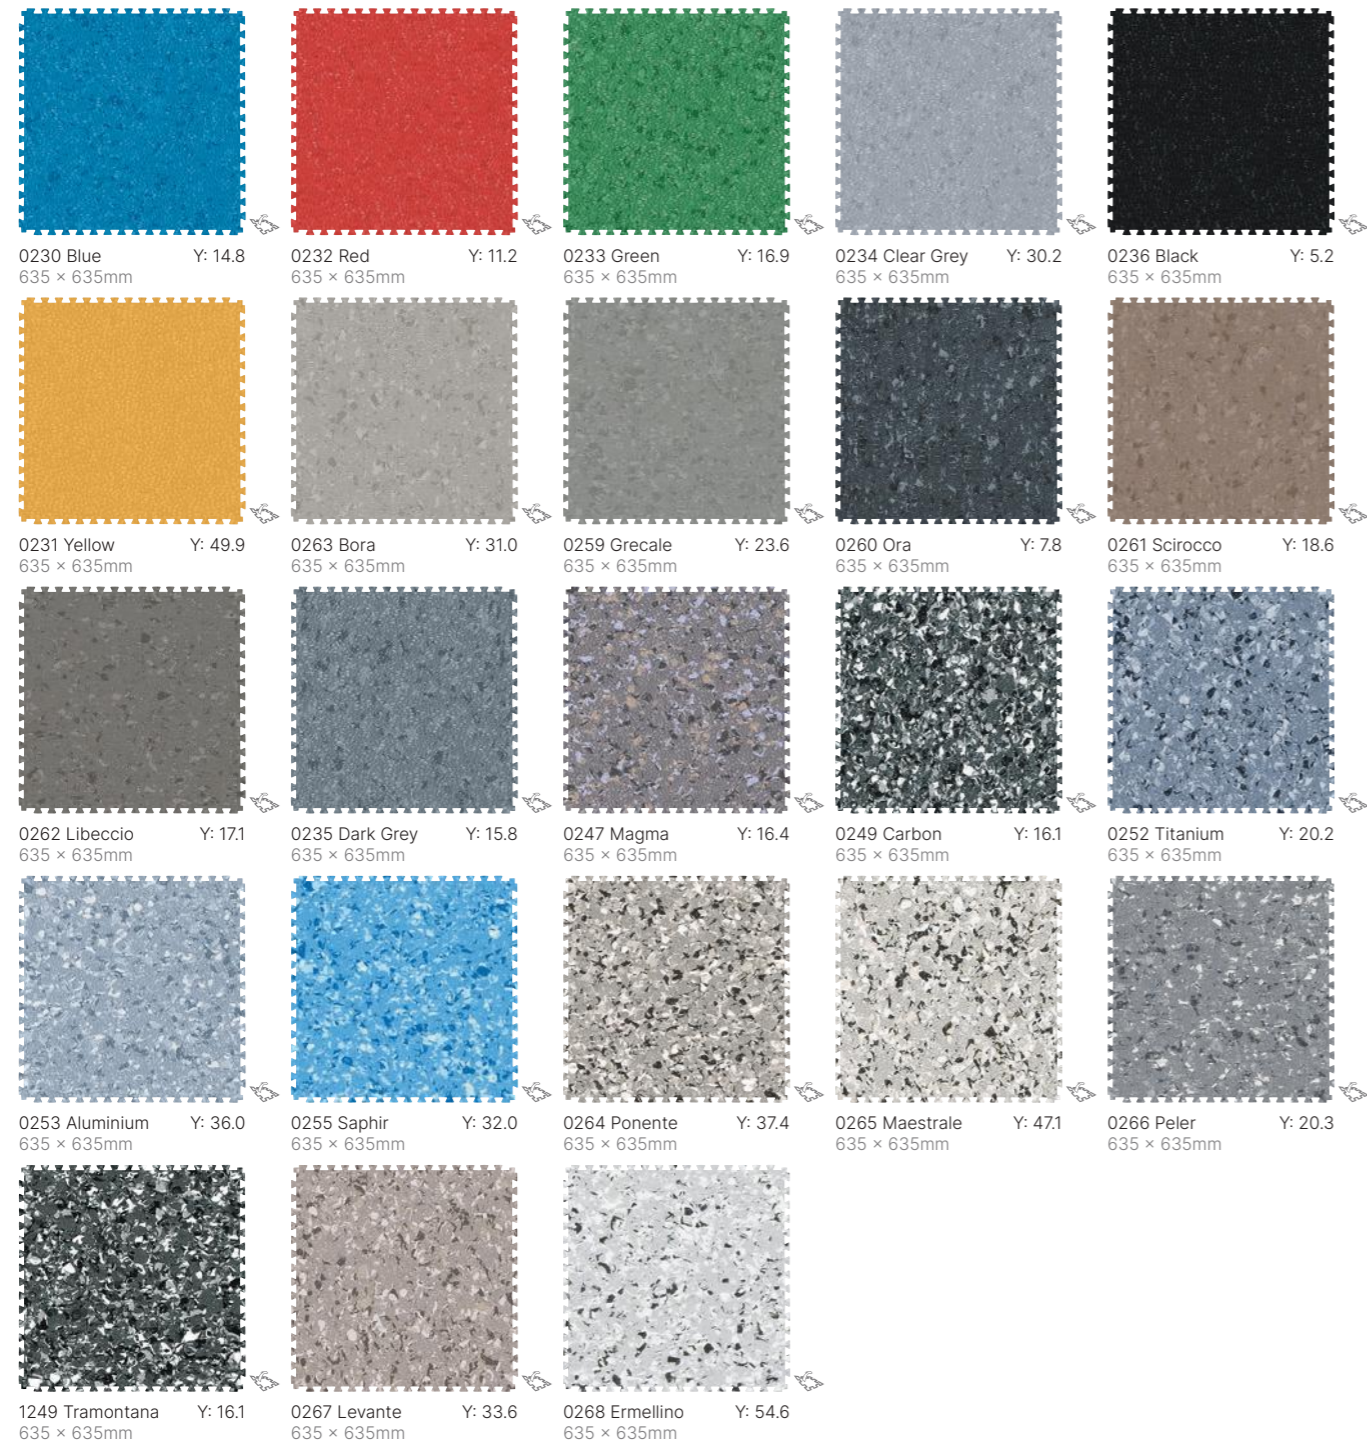


PUR+ | **2.00mm** Wear Layer | **T** Wear Group | **R10** Slip Resistant | **Y** = Light Reflectance Value (LRV)




0268 Ermellino

Attraction®

Fast Track Flooring Tiles

- > Tough and durable, suitable for high traffic areas
- > Interlocking tiles for fast installation and replacement of tiles
- > Low maintenance due to ProtecSol®2 surface treatment

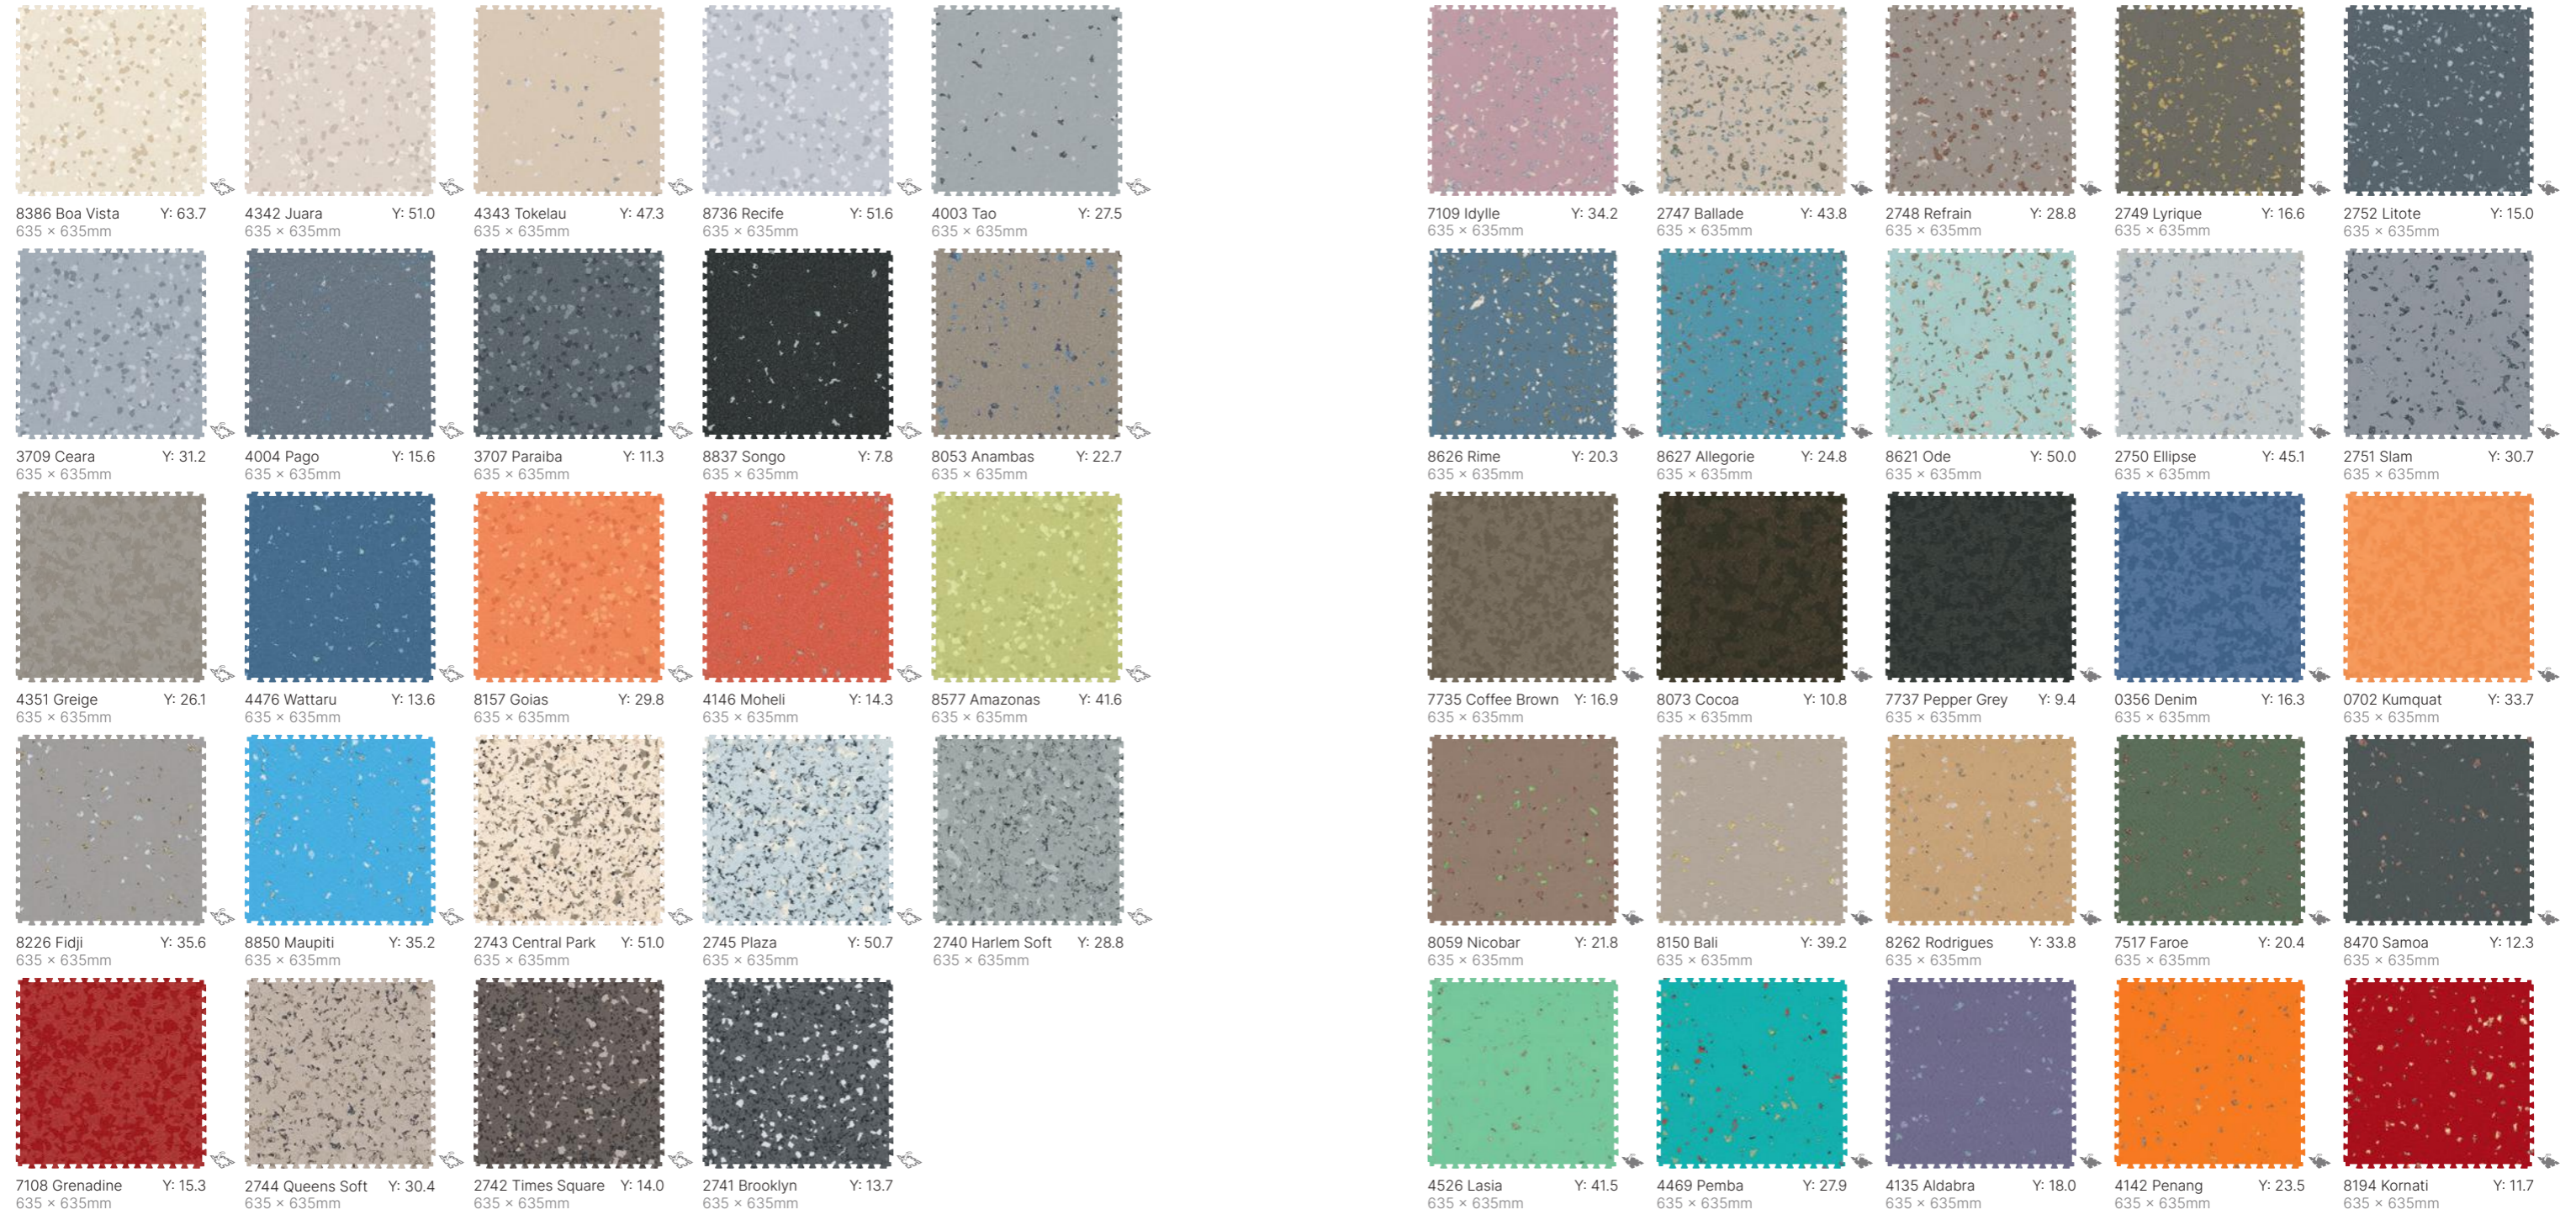

Creation 70 Connect

Fast Track Flooring Tiles


NEW RANGE

- > Extra-large, square format, fast track tiles
- > Resilient reinforced core, suitable for medium traffic applications
- > ProtecSol® surface treatment - easy to maintain


Textile




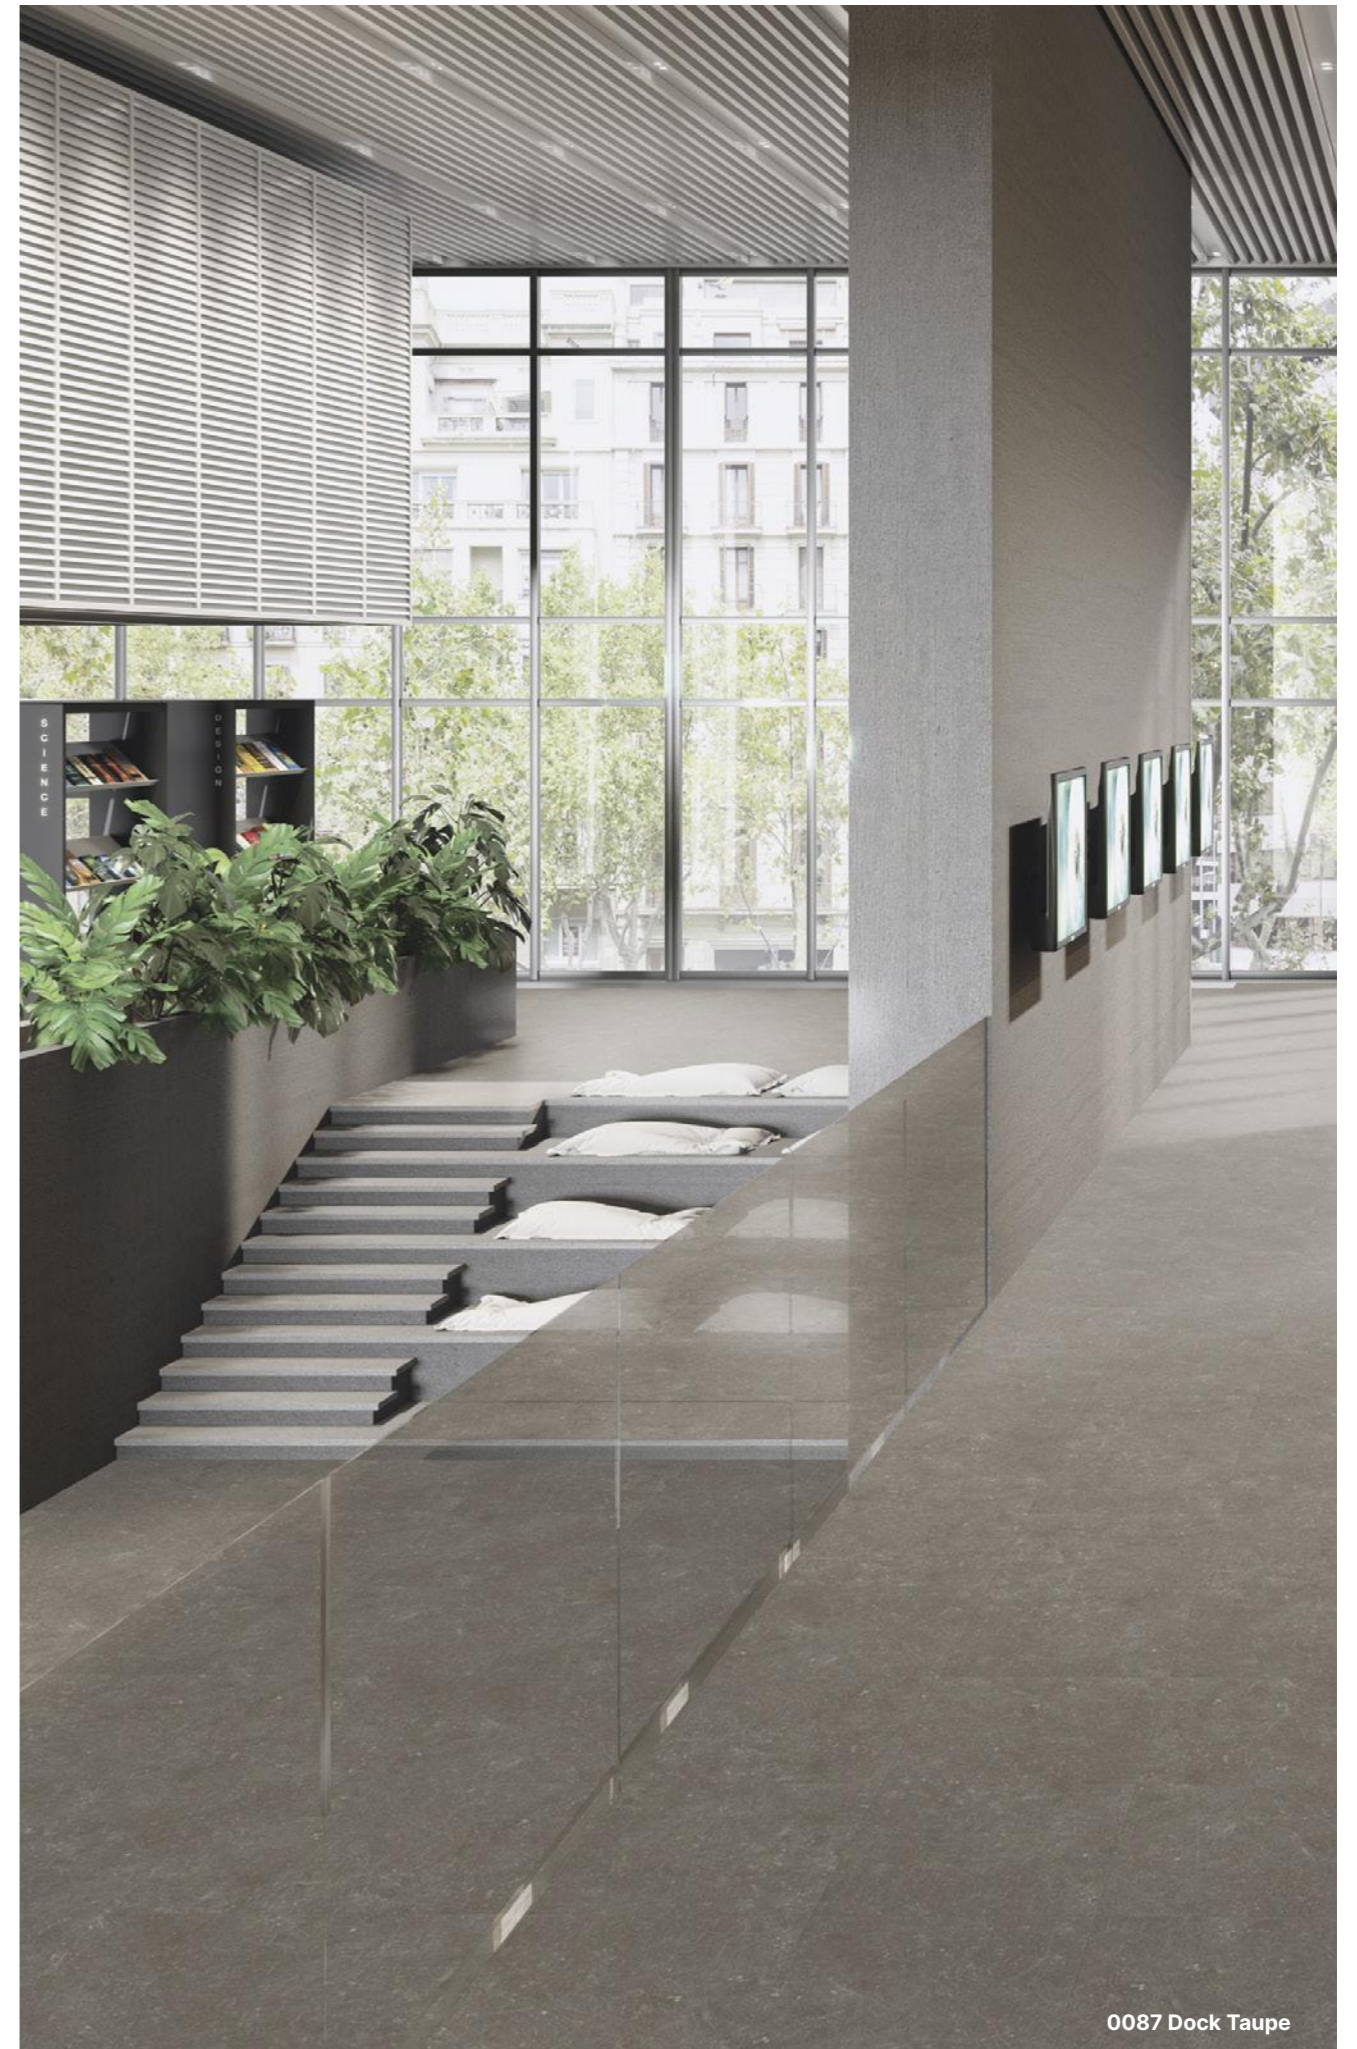
Concrete

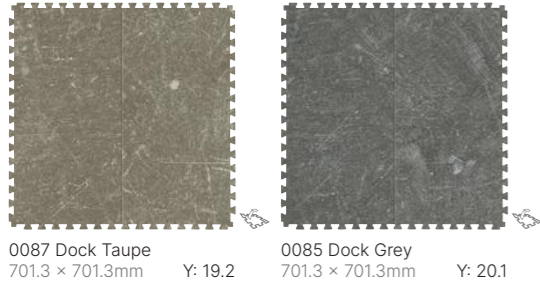

Terrazzo

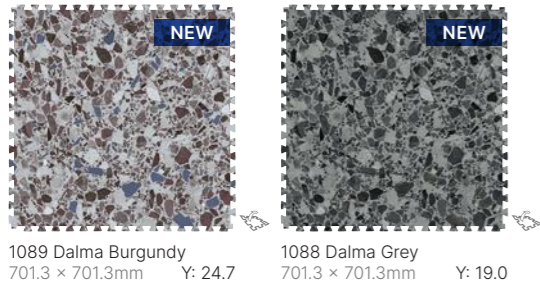


PUR+ Matt | **0.7mm** Wear Layer | **T** Wear Group | **R10** Slip Resistant | **Y** = Light Reflectance Value (LRV)




0087 Dock Taupe

Compact Linoleum Flooring

DLW Marmorette is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2400gr/sqm in 2.0mm, 2900gr/sqm in 2.5mm and 3800gr/sqm in 3.2mm. It features a marbled design and presents a matt finish, is composed of 98% bio based materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

DLW Colorette is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900gr/sqm in 2.5mm. It features a speckled design and presents a matt finish, is composed of 98% bio based materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

DLW Uni Walton is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900gr/sqm in 2.5mm. It features a uni design and presents a matt finish, is composed of 98% bio based materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable.

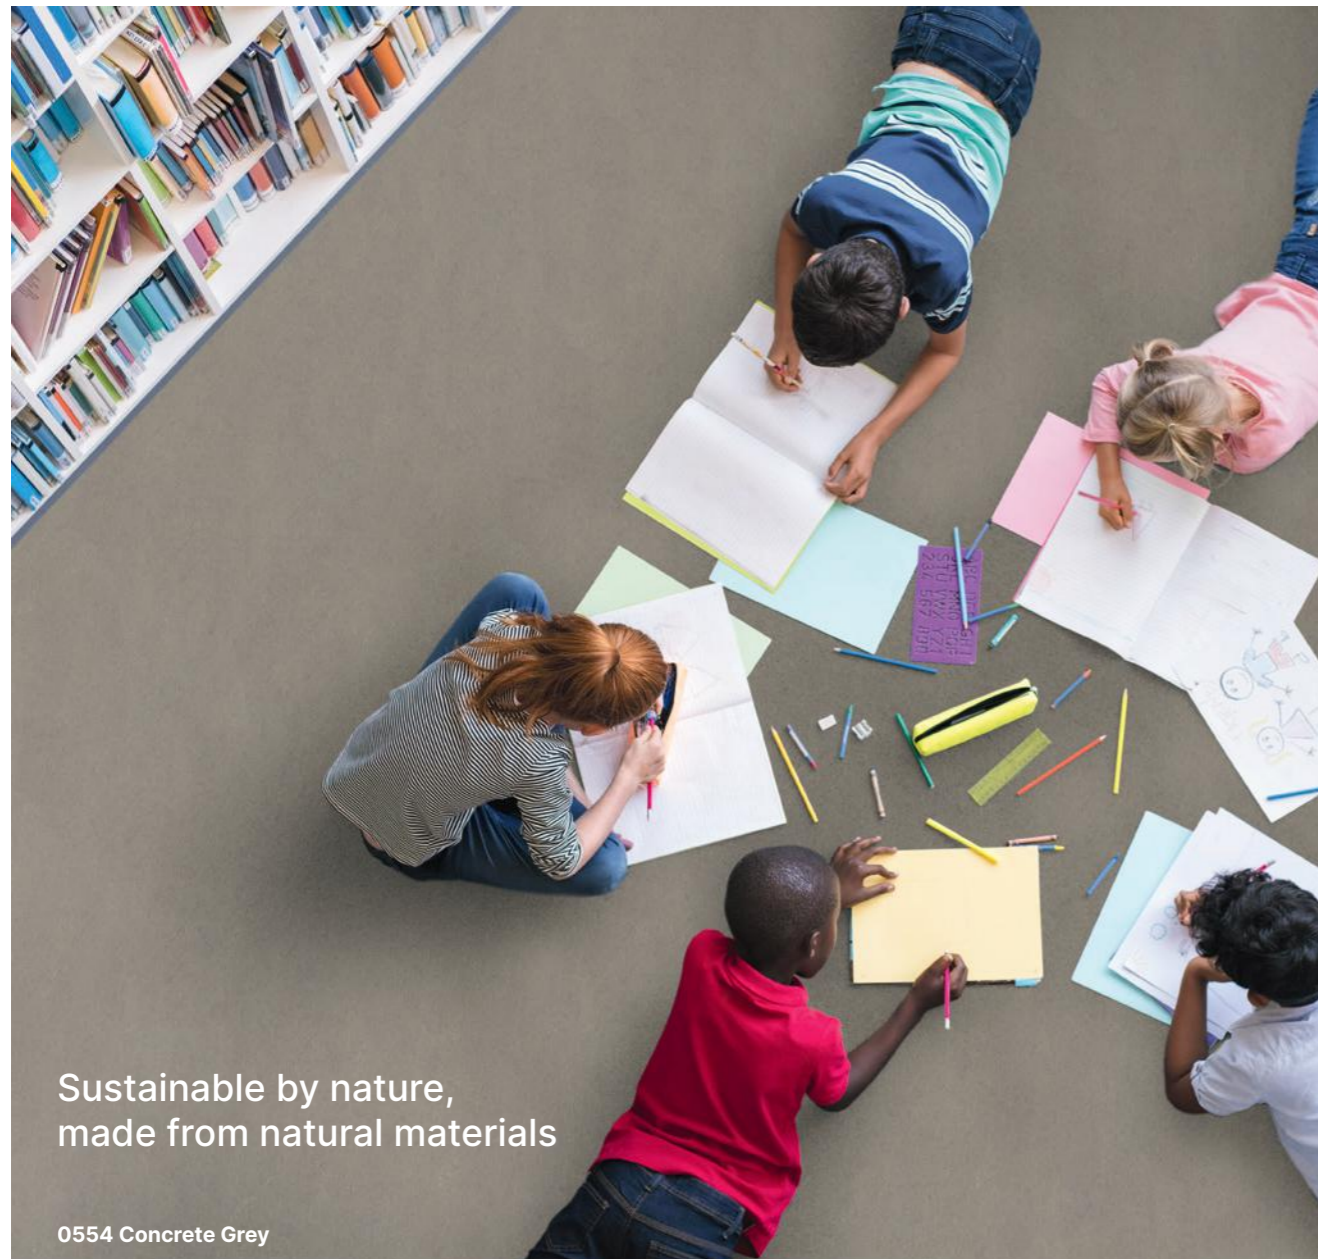

Sustainable by nature,
made from natural materials

0554 Concrete Grey



	DLW Marmorette	DLW Colorette	DLW Uni Walton
--	----------------	---------------	----------------

Description					
Thickness	EN ISO 24346	mm	2.0 / 2.5 / 3.2	2.5	2.5
Backing	-	-	Jute fabric	Jute fabric	Jute fabric
Weight	EN ISO 23997	g/sqm	2400 / 2900* / 3800	2900	2900
Width of sheet	EN ISO 24341	cm	200	200	200
Length of sheet	EN ISO 24341	w	20-31	20-31	20-31
Classification					
Norm / Product specification	-	-	EN ISO 24011	EN ISO 24011	EN ISO 24011
European classification	EN ISO 10874	class	23 / 34 / 43 23 / 32 / 41 in 2.0mm	23 / 34 / 43	23 / 34 / 43
Fire rating	EN 13501-1	class	Cfl-s1**, Bfl-s1*	Cfl-s1**	Cfl-s1**
Impact sound insulation	EN ISO 717-2	dB	3dB / 5dB* / 6dB	5dB	5dB
Slip resistance	ASR A1.5 / DIN 51130 - BGR 181	class	R9, R10*	R9	R9
Performances					
Residual indentation	EN ISO 24343-1	mm	≤ 0.09 / ≤ 0.11, ≤ 0.11*	≤ 0.11	≤ 0.11
Colour fastness	EN ISO 105 - B02	degree	6	6	6
Vertical resistance	EN 1081	Ohm	-	-	-
Point contact resistance	VDE 0100	kOhm	> 200	> 200	> 200
Static electrical propensity	EN 1815	kV	≈ 2.0	≈ 2.0	≈ 2.0
Castor chair test (Type W)	ISO 4918	-	OK	OK	OK
Flexibility	ISO 24344	mm	Ø 20 (2.5mm)	Ø 20	Ø 20
Thermal resistance	EN 12667	sqm,K/W	0.012 / 0.015 / 0.018, 0.015*	0.015	0.015
Thermal conductivity	EN ISO 10456	W/(m.K)	0.17	0.17	0.17
Surface treatment	-	-	Neocare™	Neocare™	Neocare™
Chemical products resistance	EN ISO 26987	class	OK	OK	OK
Anti-bacterial activity (E.coli- S.aureus- MRSA)***	EN ISO 22196 / JIS Z 2801	-	> 99.99% inhibits growth	>99.99% inhibits growth	>99.99% inhibits growth
Anti-viral activity (Human coronavirus)***	ISO 21702	-	> 98.65% virucidal activity	> 98.65 % virucidal activity	> 98.65 % virucidal activity
TVOC after 28 days	EN 16516	microgram/m³	< 10	< 10	< 10
Certification	Cradle to Cradle	Silver	Silver	Silver	Silver
CE Marking					
CE	EN 14041 : 2004 AC : 2006				

* R10 Bfl Also available in the following colours:

- 0023 Dusty Blue
- 0045 Sand Beige
- 0053 Ice Grey
- 0059 Plumb Grey
- 0070 Rocky Brown


** Glued according to certificate.

*** The implementation of an effective cleaning method is the best defence against infection.

DLW Marmorette

Linoleum Flooring

- > Made of 98% natural (bio based and mineral) and 76% rapidly renewable materials
- > Up to 40% recycled content
- > Product certified by many eco-labels, including Blue Angel, M1, Floorscore and Cradle to Cradle
- > Exclusive Neocare surface treatment : best in class micro scratch and stain resistance, easy maintenance, no emissions
- > Hygienic properties : antibacterial activity (EN ISO 22196) and antiviral activity (ISO 21702)

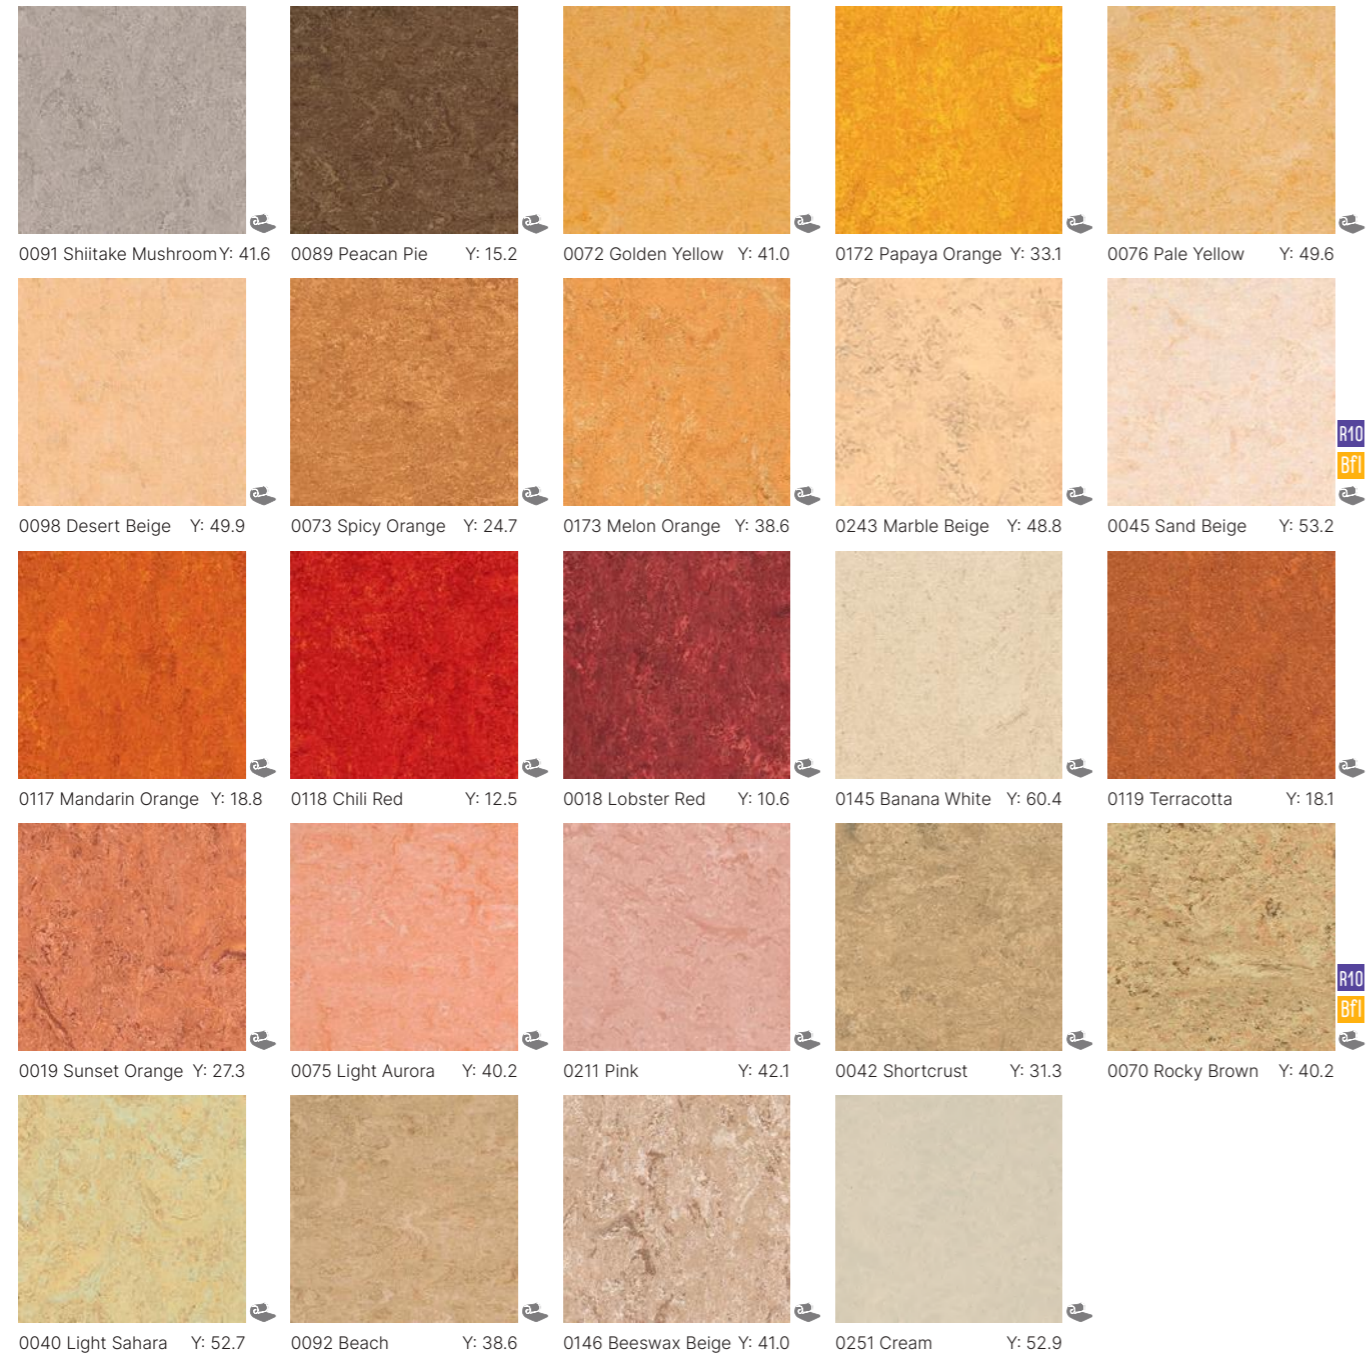

>36 Wet Pendulum Test Value | R10 R10: In-stock Bfl Bfl-s1: In-stock

Compact | Neocare™ | 2.0mm | 2.5mm | 3.2mm | Y = Light Reflectance Value (LRV) | Weld Rods see page 201




0070 Rocky Brown

DLW Marmorette

Linoleum Flooring

- > Made of 98% natural (bio based and mineral) and 76% rapidly renewable materials
- > Up to 40% recycled content
- > Product certified by many eco-labels, including Blue Angel, M1, Floorscore and Cradle to Cradle
- > Exclusive Neocare surface treatment : best in class micro scratch and stain resistance, easy maintenance, no emissions
- > Hygienic properties : antibacterial activity (EN ISO 22196) and antiviral activity (ISO 21702)

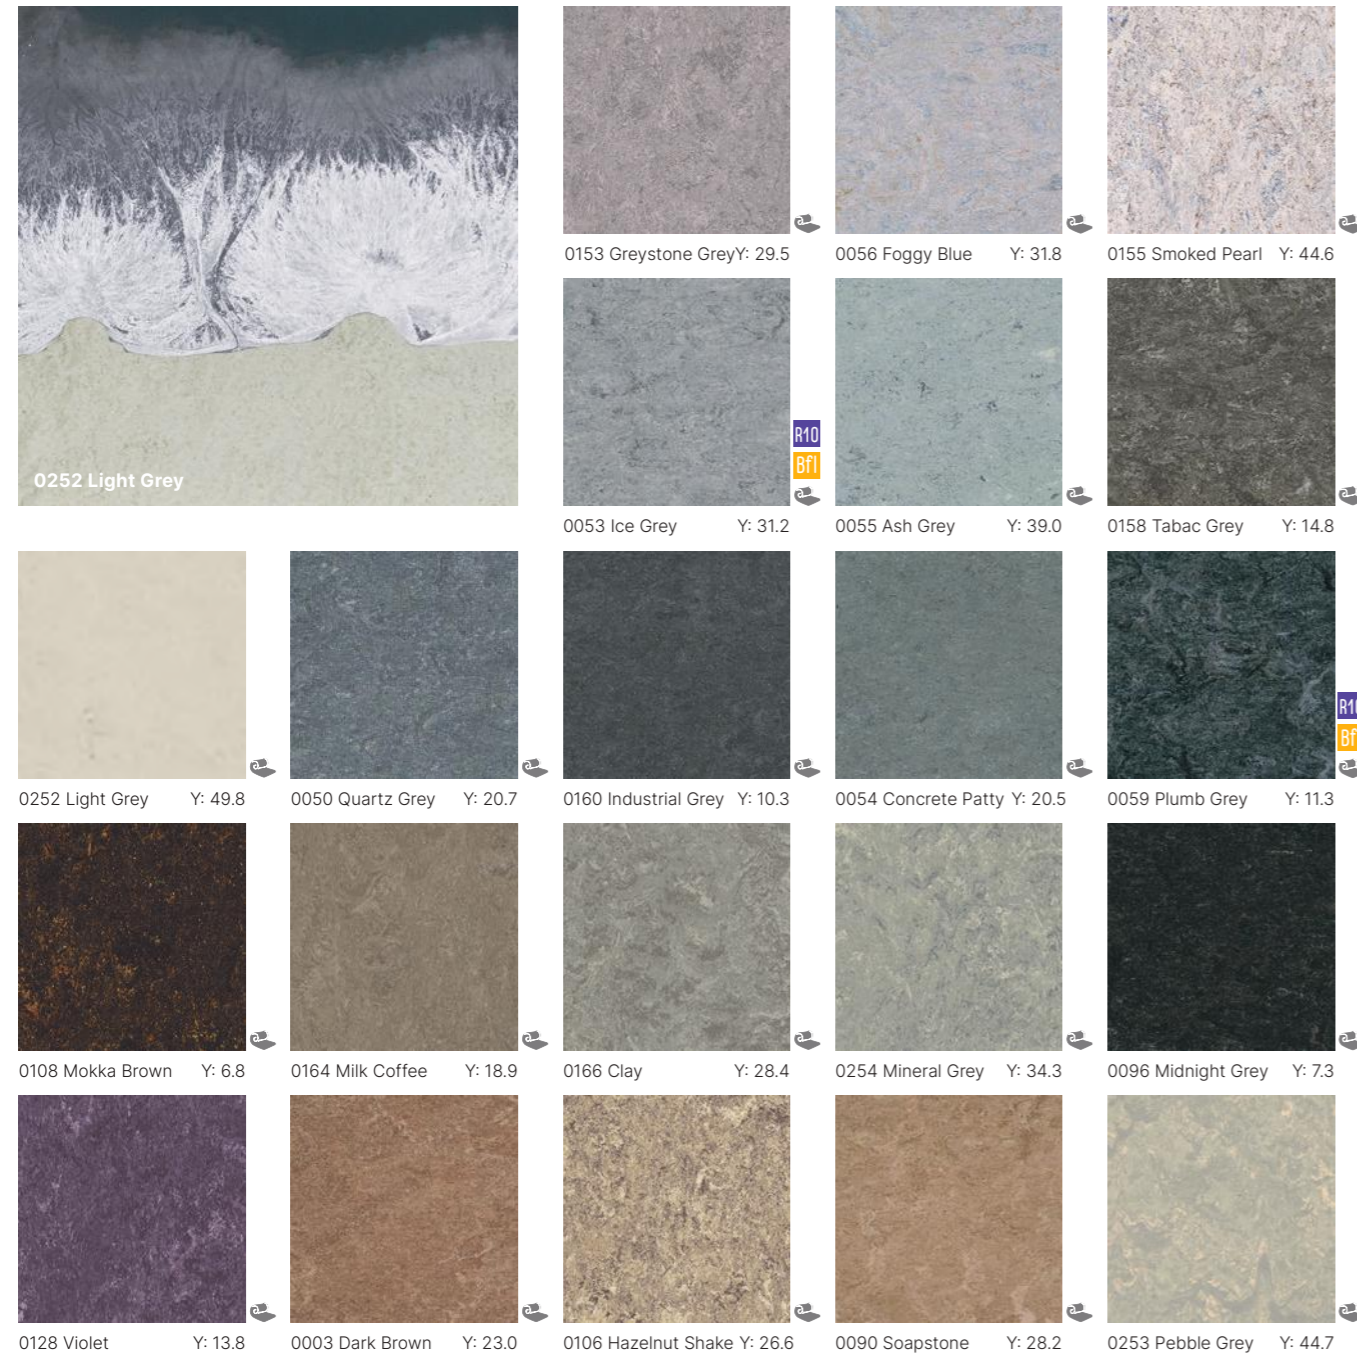


>36 Wet Pendulum Test Value | R10 R10: In-stock | Bfl Bfl-s1: In-stock

Compact | Neocare™ | 2.0mm | 2.5mm | 3.2mm | Y = Light Reflectance Value (LRV) | Weld Rods see page 201

DLW Colorette

Linoleum Flooring

- > Made of 98% natural (bio based and mineral) and 76% rapidly renewable materials
- > Up to 40% recycled content
- > Product certified by many eco-labels, including Blue Angel, M1, Floorscore and Cradle to Cradle
- > Exclusive Neocare surface treatment : best in class micro scratch and stain resistance, easy maintenance, no emissions
- > Hygienic properties : antibacterial activity (EN ISO 22196) and antiviral activity (ISO 21702)

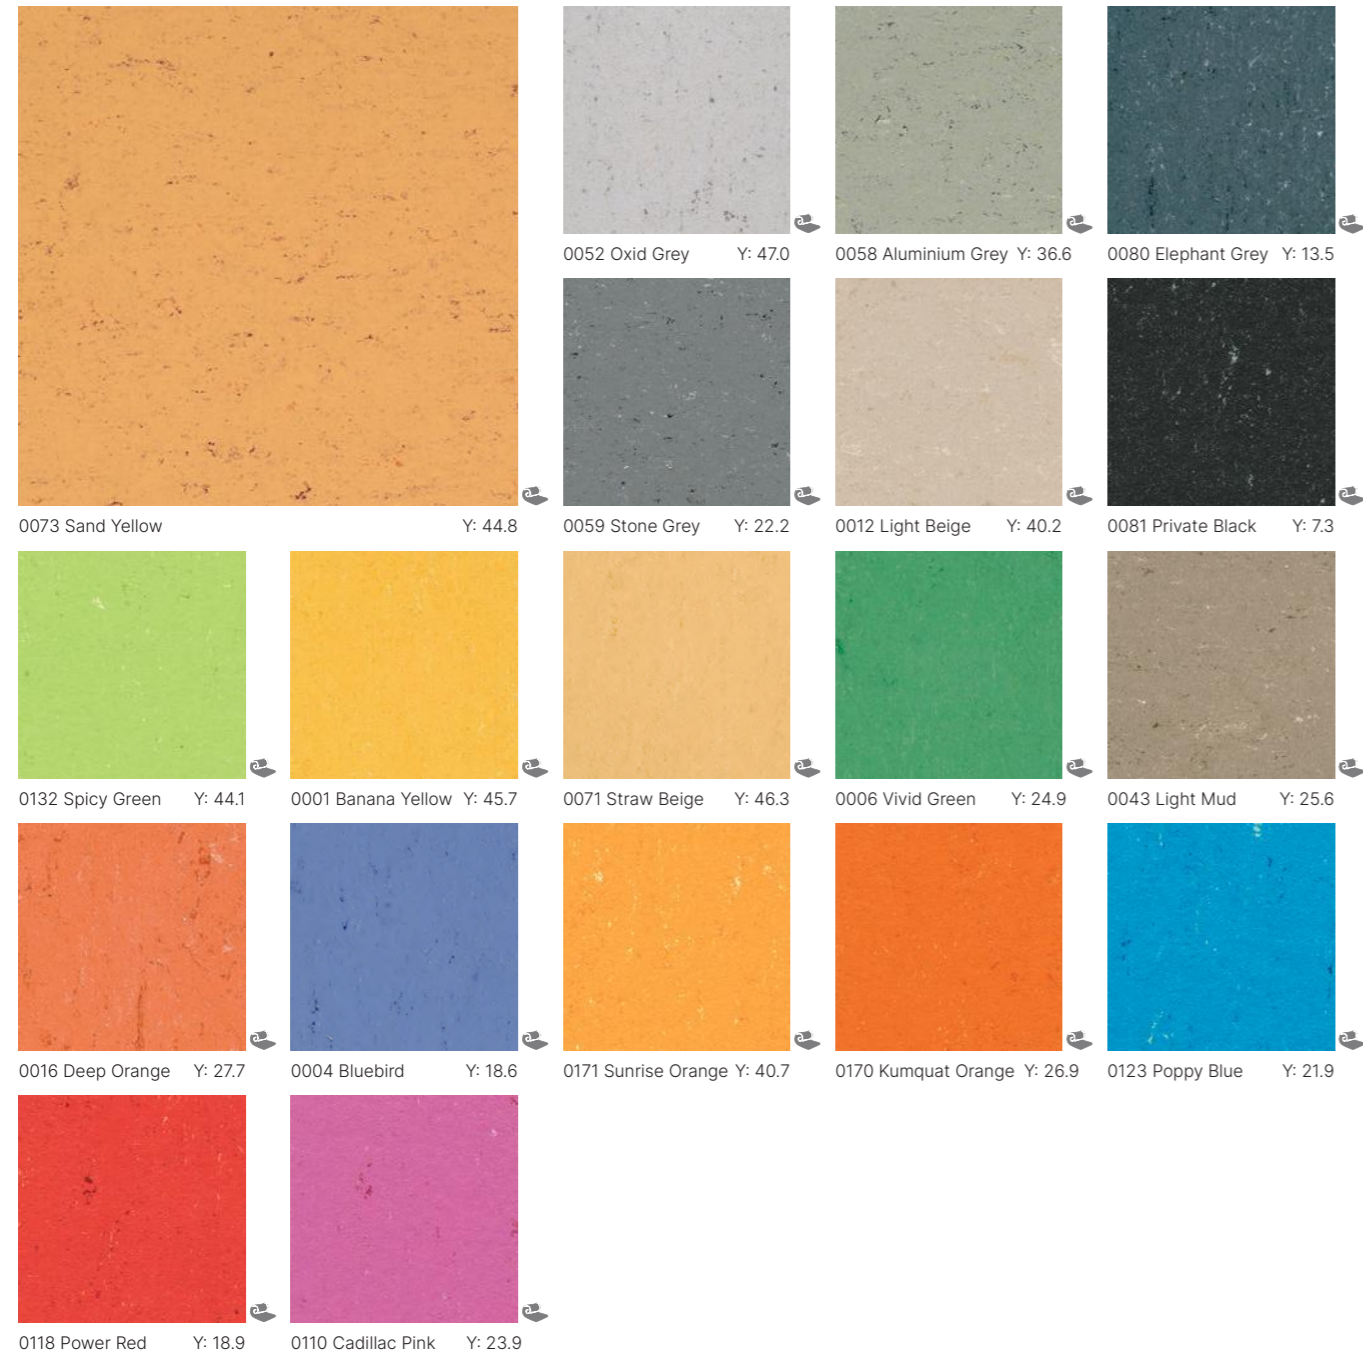

>36 Wet Pendulum Test Value




Neocare™

2.5mm

Y = Light Reflectance Value (LRV)

Weld Rods see page 201

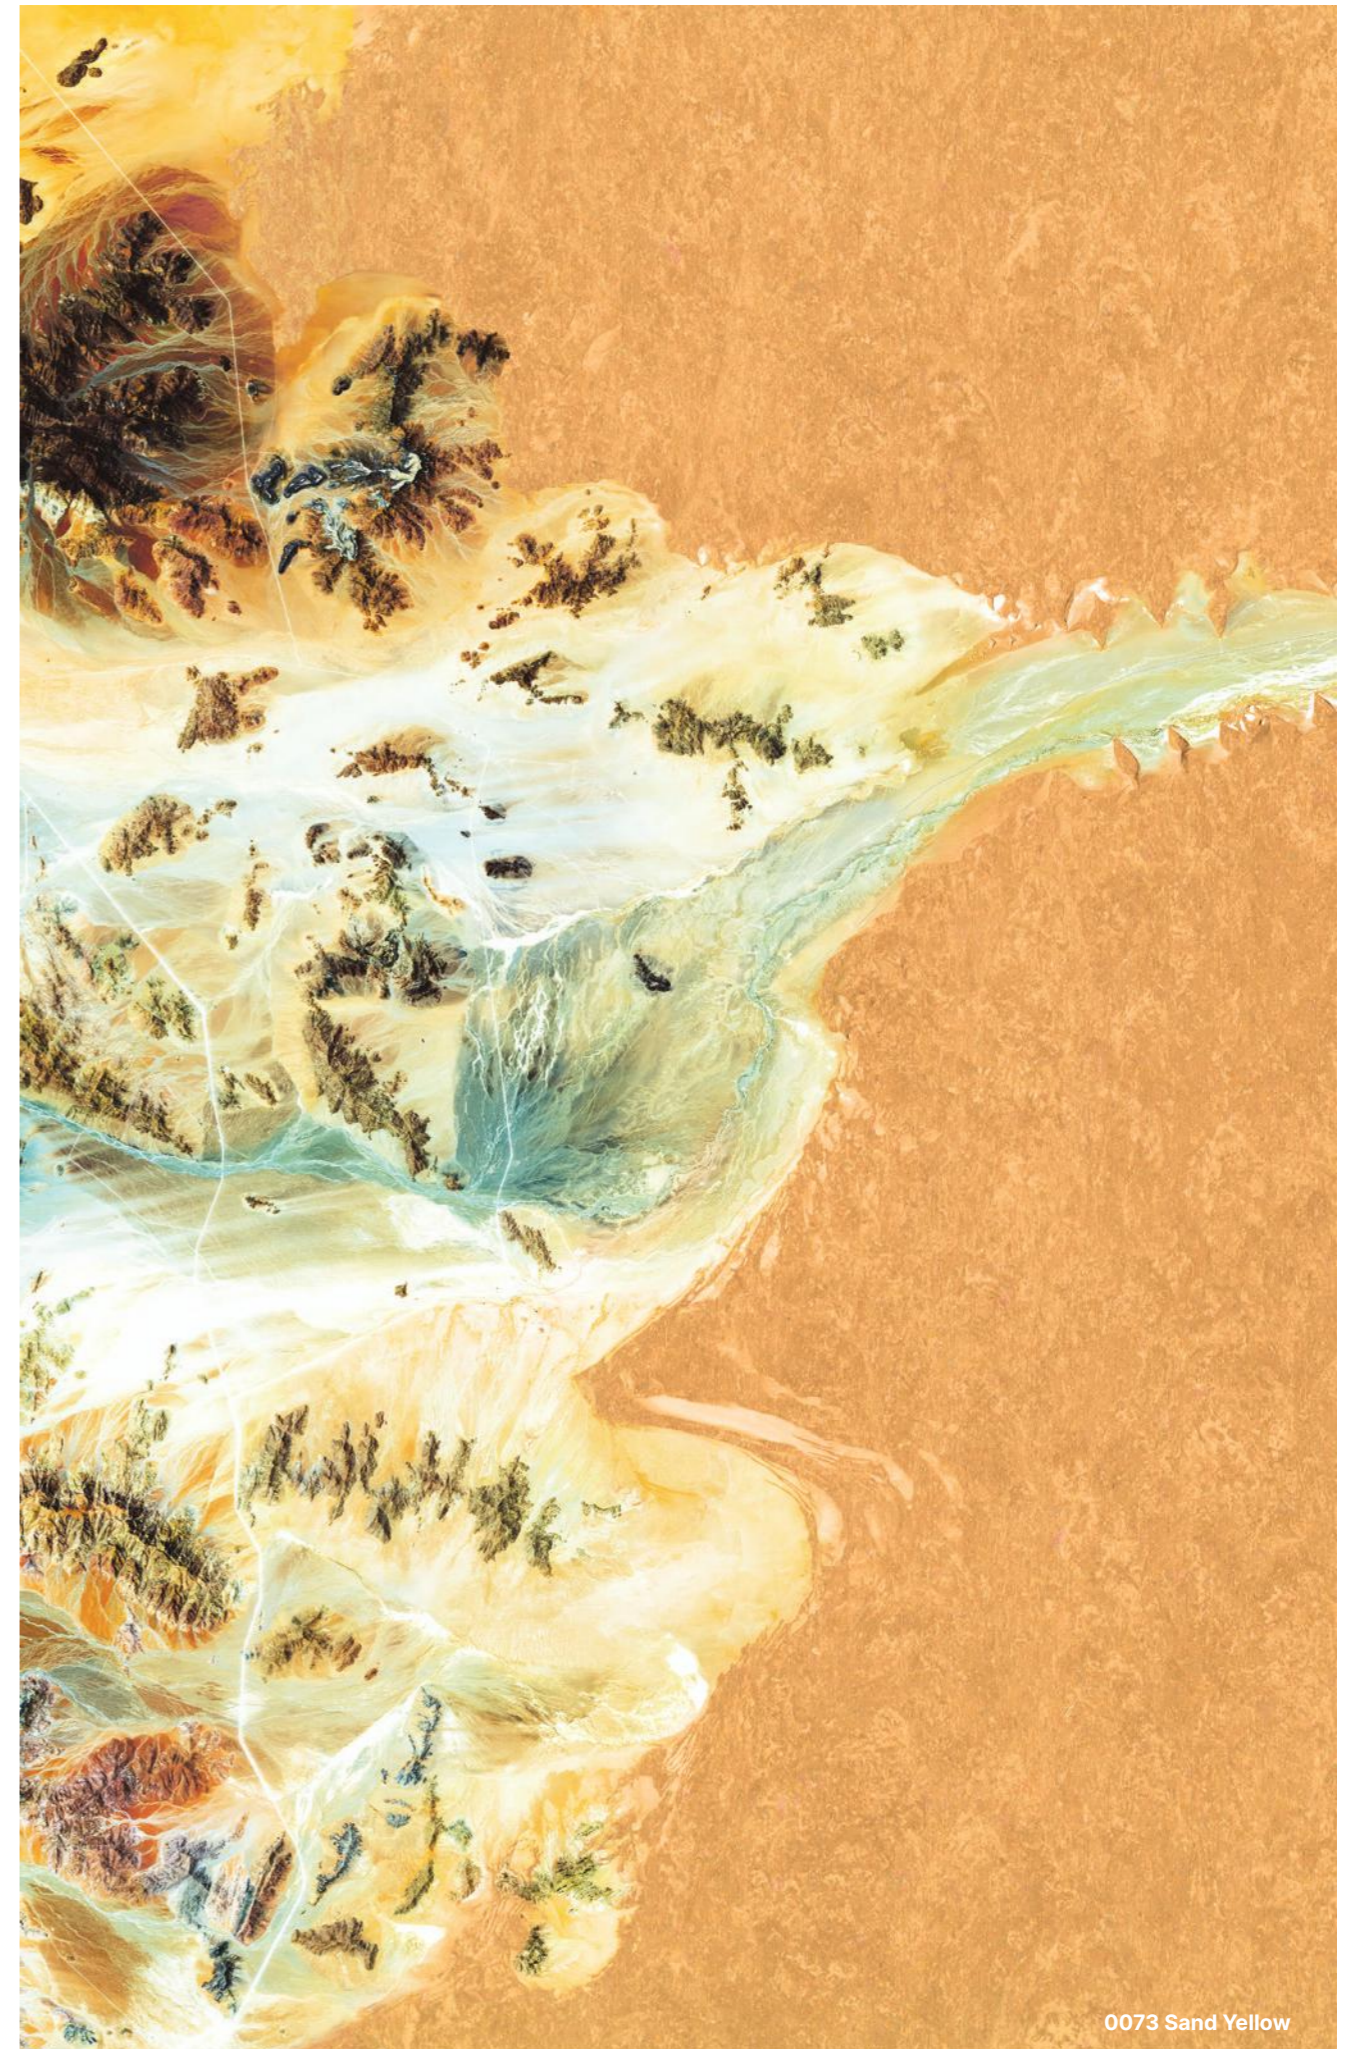


0073 Sand Yellow

DLW Uni Walton

Linoleum Flooring

- > Made of 98% natural (bio based and mineral) and 76% rapidly renewable materials
- > Up to 40% recycled content
- > Product certified by many eco-labels, including Blue Angel, M1, Floorscore and Cradle to Cradle
- > Exclusive Neocare surface treatment : best in class micro scratch and stain resistance, easy maintenance, no emissions
- > Hygienic properties : antibacterial activity (EN ISO 22196) and antiviral activity (ISO 21702)

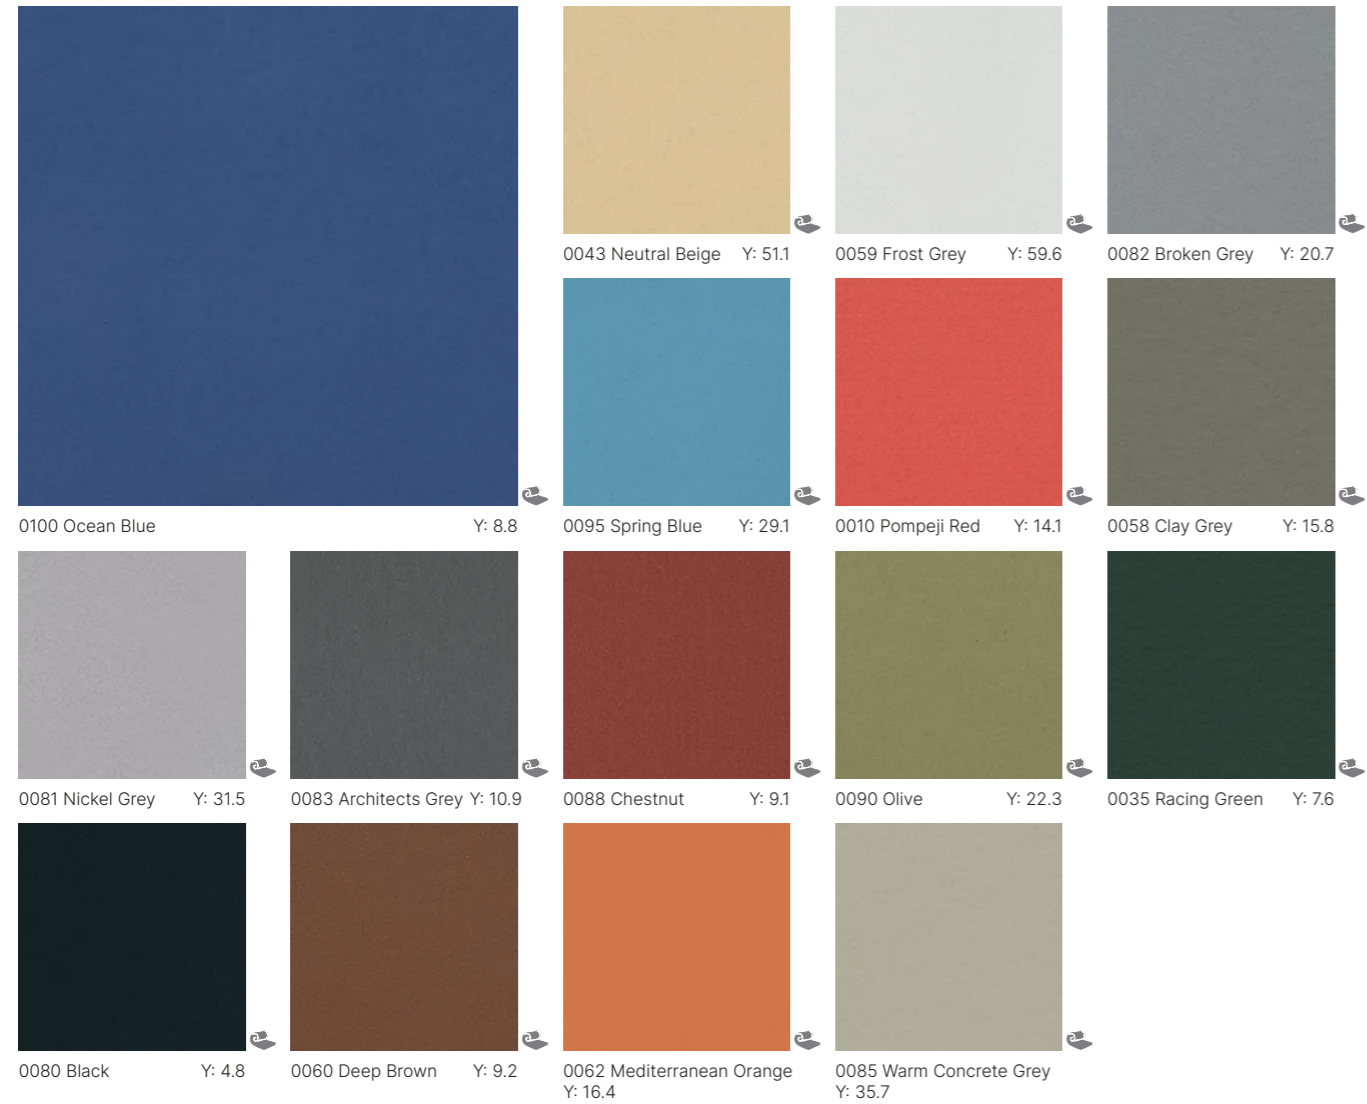

>36 Wet Pendulum Test Value



Neocare™


2.5mm

Y = Light Reflectance Value (LRV)

Weld Rods see page 201



0100 Ocean Blue

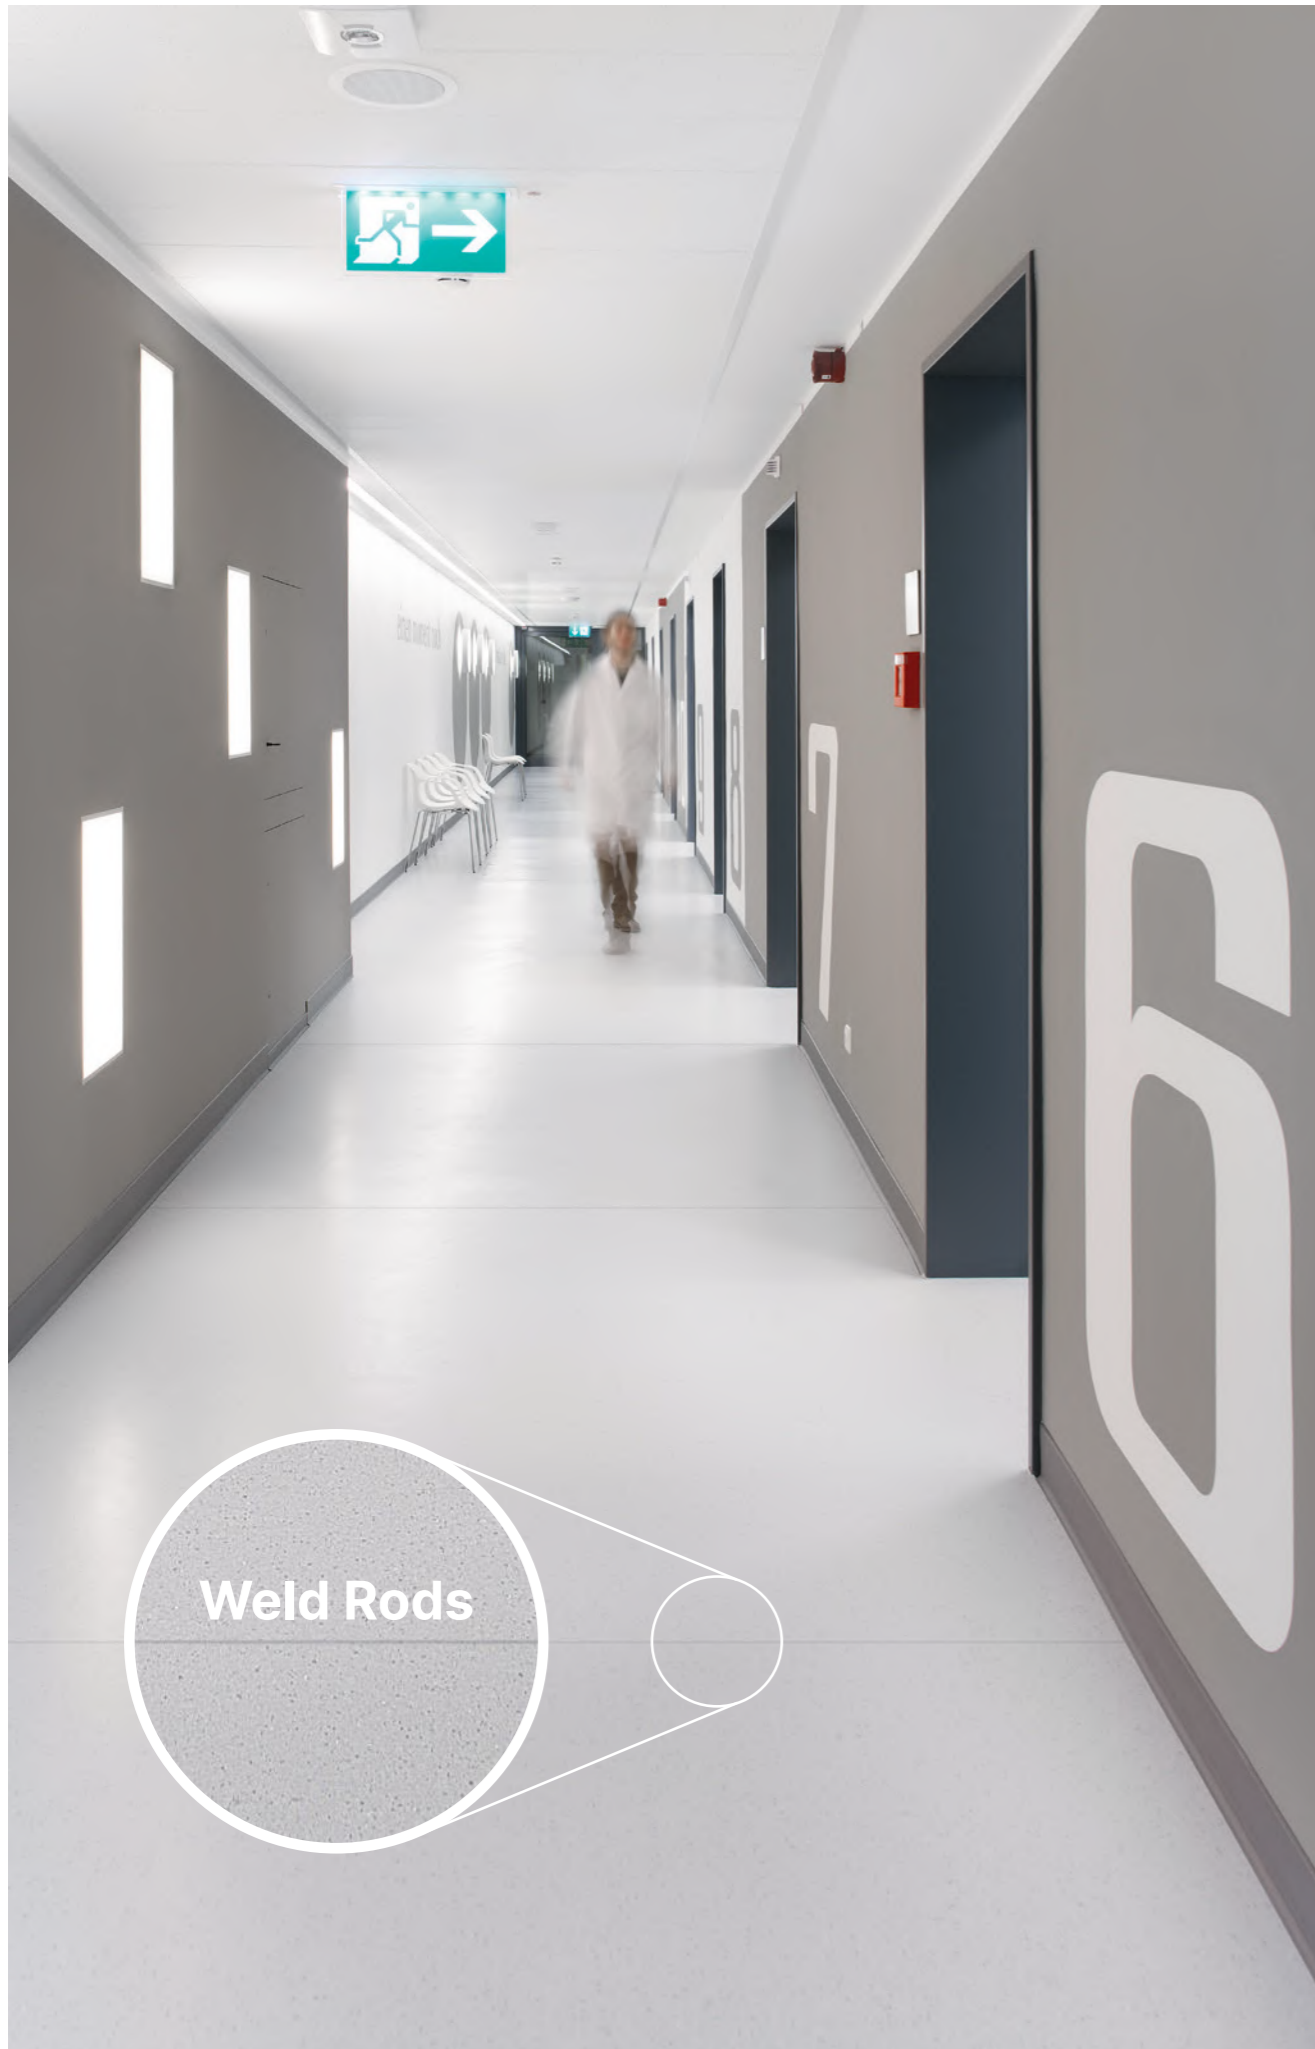

Weld Rods

Contract Safety Flooring and Shower Solutions

Taralay - Impression Control

Colour Reference	Weld Rod Code
0035 Gris	0585 0016
0038 Pierre	0585 0645
0371 Noma Rustic	0585 2336
0373 Noma Ice	0585 0620
0518 Esterel Chocolate	0585 2662
0519 Noma Beige	0585 2762
0520 Noma Black	0585 2918
0522 Habana Trinidad	0585 2481
0523 Genova	0585 0645
0524 Capri	0585 2662
0525 Modena	0585 2566
0526 Parma	0585 2144
0538 Habana Vinales	0585 2422
0543 Brescia	0585 2227
0592 Ottawa Poplar	0585 0074
0672 Loft White	0585 0097
0680 Infinity Greige	0585 0613
1713 Esterel Frejus	0585 2486

Tarasafe - Ultra / Ultra Comfort

Colour Reference	Weld Rod Code
4128 Ruby	0585 2947
4323 Sandstone	0585 2350
4460 Topaz	0585 2434
4463 Aqua	0585 2668
4465 Cobalt	0585 0190
4470 Sapphire	0585 2165
4472 Moonstone	0585 0905
4505 Peridot	0585 2499
4508 Jade	0585 2418
7383 Diopside	0585 2416
7384 Citrine	0585 2174
7482 Halite	0585 0823
8013 Jasper	0585 2282
8701 Opal	0585 2415
8704 Pebble	0585 0173
8709 Granite	0585 0033
8710 Basalt	0585 2530
8717 Obsidian	0585 2238

Tarasafe - Standard

Colour Reference	Weld Rod Code
7107 Poppy	0585 2947
7115 Flame	0585 2651
7302 Sahara	0585 0094
7312 Dune	0585 2144
7386 Savana	0585 0386
7438 Baleine	0585 0638
7508 Avocado	0585 2603
7618 Edelweiss	0585 2786
7704 Sky Blue	0585 2259
7709 Royal Blue	0585 0584
7731 Marbre	0585 0509
7767 Dove Grey	0585 0336
7773 Storm	0585 0033
7801 Noir	0585 0675

Tarasafe - Plus

Colour Reference	Weld Rod Code
7386 Savana	0585 0386
7731 Marbre	0585 0509
7767 Dove Grey	0585 0336

Tarasafe - Super

Colour Reference	Weld Rod Code
7386 Savana	0585 0386
7767 Dove Grey	0585 0336

Tarasafe - Ultra H₂O

Colour Reference	Weld Rod Code
7314 Sand	0585 2174
7325 Seashore	0585 2654
7413 Ocean Blue	0585 0823
7418 Marine	0585 0190
7513 Seagrass	0585 2499
7720 Iceberg	0585 2415
7732 Gravel	0585 2238
7746 Stone	0585 0033

Elegance SD - Shower Solutions

Colour Reference	Weld Rod Code
0322 Jicama	0585 0153
0329 Hazelnut	0585 2144
0704 Raspberry Grey	0585 0682
0705 Patisson	0585 2415

Mural - Calypso

Colour Reference	Weld Rod Code
7000 Bamboo Snow Pearl	0585 2379
7001 Bamboo Haze Pearl	0585 2415
7002 Bamboo Lotus	0585 2558
7003 Prism Ice	0585 0807
7004 Prism Haze Pearl	0585 2415
7005 Blossom Snow Pearl	0585 2379
7006 Blossom Haze Pearl	0585 2415
7007 Blossom Lichen	0585 2937
7008 Fossil Ice	0585 0807
7009 Fossil Haze	0585 2415
7010 Haze	0585 2415
7011 Lichen	0585 2937
7012 Breeze	0585 0515
7104 Melon	0585 2643
7201 Moonlight	0585 2588
7309 Lotus	0585 2558
7311 Linen	0585 2614
7408 Skyline	0585 2643
7414 Fabric Denim	0585 2868
7611 Snow	0585 2379
7711 Ice	0585 0603
7712 Shadow	0585 2648
7714 Frost	0585 2635
7715 Crystal	0585 2665
7721 Manhattan Mist	0585 0603
7728 Manhattan Stone	0585 2866
7734 Manhattan Concrete	0585 2867
7736 Fabric Wool	0585 2864
7740 Fabric Silk	0585 2865
7744 Nordic Milk	0585 2786
7753 Nordic Zen	0585 2788

Weld rod references are subject to change, please confirm with your sales advisor at point of ordering.

Weld Rods

Homogenous Flooring

Mipolam - Symbioz

Colour Reference	Weld Rod Code
6001 Cotton	0507 0696
6002 Lipica	0507 2737
6005 Ghibli	0507 2736
6006 Blue Sky	0507 2501
6008 Calico	0507 2503
6009 Grey Stone	0507 2504
6010 Mist	0507 0626
6018 Ushuaia	0507 2809
6025 Tangelo	0507 2733
6027 Acacia	0507 2507
6029 Cloud	0507 2508
6030 Stonehenge	0507 2739
6031 Breeze	0507 2509
6032 Sunshine	0507 2510
6034 Mole	0507 2511
6036 Oceania	0507 2740
6037 Lagoon	0507 2259
6039 Pebble	0507 2513
6041 Clay	0507 0582
6043 Wood	0507 2258
6044 Sea Storm	0507 0135
6045 Chocolate	0507 2918
6047 Saugie	0507 2735
6050 Hurricane	0507 2738
6056 Tulum	0507 2741
6057 Musk	0507 2804
6058 Vermiglio	0507 2803
6059 Black Diamond	0507 2516
6065 Segesta	0507 2808
6067 Kaki	0507 2732
6075 Cardinal	0507 2734

Mipolam - Planet

Colour Reference	Weld Rod Code
5402 Ivory Dust	0585 2862
5403 Moon Dust	0585 2882
5404 Vanilla Sky	0585 3012
5406 Moqui	0585 2127
5408 Chalk Dust	0585 3017
5409 Pebble Beach	0585 0026
5410 Sillex	0585 2415
5411 Atlantic Grey	0585 2825
5412 Moon Stone	0585 2788
5413 Rain Fall	0585 3015
5416 Acquamarina	0585 0500
5417 Foggy Hill	0585 2935
5418 Terra Nera	0585 3010
5420 Stone Powder	0585 2881
5422 Sunflower	0585 0192
5424 Hawk Eye	0585 3013
5426 Shadow	0585 0236
5427 Green Zest	0585 2885
5428 Shedded Ground	0585 3011
5429 Fog Patch	0585 0514

Mipolam - Planet *contd.*

Colour Reference	Weld Rod Code
5430 Sideral Grey	0585 0075
5432 Sun Stone	0585 3022
5436 Tiger Eye	0585 3020
5437 Reef Water	0585 3019
5438 Andalusite	0585 3009
5439 Moon Way	0585 3016
5441 Clay Soil	0585 2914
5443 Wood Path	0585 0109
5444 Rocky Hill	0585 2998
5445 Tree Bark	0585 2957
5446 Blue Nug	0585 0028
5447 Aventurine	0585 2960
5450 Blended Ashes	0585 0033
5455 Lava Flow	0585 3023
5456 Intense Indigo	0585 2460
5459 Stormy Cloud	0585 3014
5460 Lava Stone	0585 0751
5466 Rocky Blue	0585 3018
5475 Intense Ruby	0585 2910
5482 Sugar Drip	0585 3024

Mipolam - Accord

Colour Reference	Weld Rod Code
0301 Louise	0585 2882
0303 Manitoba	0585 0498
0305 Light Sand	0585 2862
0306 Inari	0585 2644
0310 Huron	0585 2633
0312 Powell	0585 2415
0315 Orange River	0585 2913
0316 Malaren	0585 0500
0319 Toba	0585 0069
0320 Ontario	0585 2881
0321 Salt	0585 0196
0324 Sand	0585 0660
0330 Kruger	0585 0075
0332 Dore	0585 0110
0346 Roxen	0585 0691
0360 Balaton	0585 2320
0417 Constance	0585 2375
0425 Cork	0585 2634
0437 Flamingo Resort	0585 0007
0441 Loch Ness	0585 0645
0443 Krumme	0585 2883
0445 Otto	0585 2573
0447 Grunsee	0585 2885
0448 Bandak	0585 2879
0450 Thames	0585 2880
0457 Como	0585 2884
0459 Mississippi	0585 2272
0463 Bourget	0585 2762

Mipolam - Accord Multicoloured Weld Rod

Colour Reference	Weld Rod Code
0301 Louise	H058 0016
0303 Manitoba	H058 0018
0305 Light Sand	H058 0014
0306 Inari	H058 0011
0310 Huron	H058 0010
0312 Powell	H058 0023
0315 Orange River	H058 0021
0316 Malaren	H058 0017
0319 Toba	H058 0028
0320 Ontario	H058 0020
0321 Salt	H058 0025
0324 Sand	H058 0026
0330 Kruger	H058 0012
0332 Dore	H058 0007
0346 Roxen	H058 0024
0360 Balaton	H058 0001
0417 Constance	H058 0005
0425 Cork	H058 0006
0437 Flamingo Resort	H058 0008
0441 Loch Ness	H058 0015
0443 Krumme	H058 0013
0445 Otto	H058 0022
0447 Grunsee	H058 0009
0448 Bandak	H058 0002
0450 Thames	H058 0027
0457 Como	H058 0004
0459 Mississippi	H058 0019
0463 Bourget	H058 0003

Multicoloured weld rods create a more invisible join for improved aesthetics

Mipolam - Affinity

Colour Reference	Weld Rod Code
4401 Quartz	0585 2882
4402 Yuki	0585 2882
4403 Natural Shade	0585 0498
4404 Milkshake	0585 2958
4405 Sand Opal	0585 2862
4407 Spearmint	0585 2954
4408 Crystal Ice	0585 0196
4409 Matte Grey	0585 2415
4410 Violet Grey	0585 2633
4411 Raffia	0585 2788
4412 Tundra	0585 2956
4413 Marlyn	0585 2227
4416 Sapphire	0585 0500
4417 Aquamarine	0585 2375
4420 Silver Grey	0585 2881
4422 Mango	0585 0192
4424 Smoked Opal	0585 0660
4425 Amber	0585 2634
4426 Baltic	0585 2868
4427 Pine Forest	0585 2964
4428 Sandy	0585 2955
4429 Grey Opal	0585 0509
4430 Pearl Grey	0585 0075
4431 Exotic Mud	0585 2959
4432 Citrine	0585 0110
4433 Ash Coat	0585 0919
4434 Cast Iron	0585 0648
4435 Butternut	0585 2444
4436 Santorini	0585 0028
4437 Cashmere Rose	0585 0007
4441 Light Greige	0585 0645
4443 Lime Taupe	0585 2883
4444 Havana Brown	0585 2957
4445 Mocca	0585 2573
4446 Blue Ocean	0585 0691
4447 Light Emerald	0585 2885
4448 Ruby	0585 2879
4450 Stormy Weather	0585 2880
4455 Orange Sunlight	0585 2913
4457 Olivine	0585 2884
4459 Grey Storm	0585 2272
4460 Black Stone	0585 2320
4463 Greige	0585 2762
4466 Thistle	0585 2961
4467 Clover	0585 2960
4475 Cinabre	0585 2965
4476 Amethyst	0585 2966
4481 Rosaspina	0585 2962
4482 Orchid	0585 2963
4496 Light Sapphire	0585 2644

Mipolam - Affinity Multicoloured Weld Rod

Colour Reference	Weld Rod Code
4401 Quartz	H058 0016
4403 Natural Shade	H058 0018
4405 Sand Opal	H058 0014
4408 Crystal Ice	H058 0025
4409 Matte Grey	H058 0023
4410 Violet Grey	H058 0010
4416 Sapphire	H058 0017
4417 Aquamarine	H058 0005
4420 Silver Grey	H058 0020
4424 Smoked Opal	H058 0026
4425 Amber	H058 0006
4429 Grey Opal	H058 0028
4430 Pearl Grey	H058 0012
4432 Citrine	H058 0007
4437 Cashmere Rose	H058 0008
4441 Light Greige	H058 0015
4443 Lime Taupe	H058 0013
4445 Mocca	H058 0022
4446 Blue Ocean	H058 0024
4447 Light Emerald	H058 0009
4448 Ruby	H058 0002
4450 Stormy Weather	H058 0027
4455 Orange Sunlight	H058 0021
4457 Olivine	H058 0004
4459 Grey Storm	H058 0019
4460 Black Stone	H058 0001
4463 Greige	H058 0003
4496 Light Sapphire	H058 0011

Multicoloured weld rods create a more invisible join for improved aesthetics

Mipolam - Cosmo

Colour Reference	Weld Rod Code
2317 Soft Green	0585 2591
2355 Real Red	0585 2947
2603 Lemon Chiffon	0585 2416
2606 Azur	0585 0631
2609 Light Smoke	0585 2865
2610 Silver	0585 2227
2633 Lichen	0585 0620
2636 Overseas	0585 0802
2638 Pure Grey	0585 0016
2639 Smart Grey	0585 0458

Mipolam - Troplan

Colour Reference	Weld Rod Code
1002 Beige	0585 2161
1003 Light Ocre	0585 2824
1004 Earth	0585 0242
1006 Blue	0585 2127
1007 Green	0585 0604
1009 Light Grey	0585 0577
1010 Grey	0585 0644
1032 Yellow	0585 2637
1033 Brown	0585 0645
1035 Ocre	0585 0896
1036 Medium Blue	0585 0631
1037 Medium Green	0585 2418
1040 Dark Grey	0585 0016
1055 Abricot	0585 2913
1056 Dark Blue	0585 2271
1057 Dark Green	0585 0689
1059 Blue Grey	0585 0586
1060 Anthracite	0585 2787

Mipolam - Classic

Colour Reference	Weld Rod Code
0002 Platinum	0585 2633
0003 Ivory	0585 2614
0005 Steel	0585 0514
0006 Honey	0585 2360
0010 Azure	0585 0805
0013 Pewter	0585 2172
0014 Brown	0585 2484
0108 Pepper	0585 0026
0120 Borneo	0585 0468
0121 Green Leaf	0585 2877
0122 Pineapple	0585 2370
0123 Corallo	0585 2822
0124 Tortora	0585 2863
0125 Truffle	0585 2232
0126 Nordica	0585 2709
0127 Bermuda	0585 2892
0301 Beige	0585 2862
0303 Grey	0585 0578

Weld rod references are subject to change, please confirm with your sales advisor at point of ordering.

Weld rod references are subject to change, please confirm with your sales advisor at point of ordering.

Weld Rods

Multilayered Flooring

Premium - Osmoz

Colour Reference	Weld Rod Code
0356 Denim	0585 2271
0702 Kumquat	0585 2240
3791 Slate Grey	0585 0033
3792 Storm Grey	0585 2701
4349 Angora	0585 0645
4350 Elefant	0585 2784
4351 Greige	0585 2762
4364 Ivory New	0585 2786
4365 Alpaga New	0585 2788
4496 Pacific Blue	0585 2709
4527 Bamboo	0585 2813
7108 Grenadine	0585 2460
7204 Mimosa	0585 2902
7735 Coffee Brown	0585 2340
7737 Pepper Grey	0585 2320
8073 Cocoa	0585 0445

Premium - Poesy

Colour Reference	Weld Rod Code
2747 Ballade	0585 0620
2748 Refrain	0585 2719
2749 Lyrique	0585 2720
2750 Ellipse	0585 0509
2751 Slam	0585 2721
2752 Litote	0585 2722
7109 Idylle	0585 2716
8621 Ode	0585 2717
8626 Rime	0585 2493
8627 Allegorie	0585 2718

Premium - Neopolis

Colour Reference	Weld Rod Code
2740 Harlem Soft	0585 2323
2741 Brooklyn	0585 0447
2742 Times Square	0585 2423
2743 Central Park	0585 0001
2744 Queens Soft	0585 2426
2745 Plaza	0585 0304

Premium - Indiana

Colour Reference	Weld Rod Code
3788 Nauru	0585 2599
4001 Ofu	0585 0030
4002 Manua	0585 0577
4003 Tao	0585 0586
4004 Pago	0585 2172
4009 Tufoa	0585 2161
4015 Guinea	0585 2499
4135 Aldabra	0585 2523
4142 Penang	0585 2522
4146 Moheli	0585 0928
4343 Tokelau	0585 0620
4469 Pemba	0585 2526
4476 Wattaru	0585 2271
4526 Lasia	0585 2743
7517 Faroe	0585 2909
8053 Anambas	0585 2524
8059 Nicobar	0585 2282
8150 Bali	0585 0613
8194 Kornati	0585 2947
8226 Fiji	0585 2635
8256 Tahaa	0585 2876
8262 Rodrigues	0585 2422
8470 Samoa	0585 2530
8837 Songo	0585 2320
8850 Maupiti	0585 0262

Premium - Metallica

Colour Reference	Weld Rod Code
2746 Ymir	0585 2312
8257 Nyx	0585 2714
8623 Sedna	0585 0468
8624 Triton	0585 2715
8625 Naiade	0585 2912
9310 Tethys	0585 2524
9330 Moon	0585 0613
9719 Eclipse	0585 2320
9745 Cosmic	0585 0919
9753 Energy	0585 0173

Premium - Brazilia

Colour Reference	Weld Rod Code
3707 Paraiba	0585 0063
3709 Ceara	0585 0586
3734 Almerim	0585 2599
4136 Sao Luis	0585 2539
4329 Bacabal	0585 2762
4342 Juara	0585 0620
4477 Maceio	0585 2259
4478 Copacabana	0585 2374
8157 Goias	0585 2240
8269 Ipanema	0585 2389
8386 Boa Vista	0585 0001
8577 Amazonas	0585 2499
8736 Recife	0585 0304

Taralay Impression - Wood

Colour Reference	Weld Rod Code
0025 Renzo Taupe	0585 0135
0068 Renzo Pecan	0585 2341
0371 Noma Rustic	0585 2336
0373 Noma Ice	0585 0620
0519 Noma Beige	0585 2762
0522 Habana Trinidad	0585 2481
0528 Walnut Cream	0585 0242
0538 Habana Vinales	0585 2422
0671 Loft Light Brown	0585 2481
0680 Infinity Greige	0585 0613
0719 Infinity Lichen	0585 0109
0720 Infinity Aube	0585 0242
0721 Charme Natural	0585 2481
0722 Herringbone Blond	0585 2411
0723 Charme Pecan	0585 2926
0724 Herringbone Chatain	0585 2481
0725 Sycamore Light Brown	0585 2481
0726 Sycamore Dark	0585 2918
0727 Sycamore Vanilla	0585 2224
0734 Loft Chestnut	0585 2481
0760 Moon Island	0585 2481
0773 Portobello	0585 2762
1314 Walnut Brown	0585 2486

Taralay Impression - Uni Matt

Colour Reference	Weld Rod Code
0831 Anthracite	0585 0743
0832 Grey	0585 2725
0833 Beige	0585 2904
0834 Brown	0585 2907
0835 Orange	0585 2906
0836 Tomette	0585 2910
0837 Blue	0585 2908
0838 Dark Blue	0585 2911
0839 Turquoise	0585 2905
0840 Anis	0585 2903
0842 Olive	0585 2909
0848 White	0585 2726
0849 Sun	0585 0192

Taralay Impression - Leathers

Colour Reference	Weld Rod Code
0843 Leather Grey	0585 0260
0844 Leather Marine	0585 0905
0845 Leather Greige	0585 2727

Taralay Impression - Cemento

Colour Reference	Weld Rod Code
0523 Genova	0585 0645
0524 Capri	0585 2662
0525 Modena	0585 2566
0543 Brescia	0585 2227

Taralay Impression - Trame

Colour Reference	Weld Rod Code
0774 Clear	0585 0645
0775 Blue	0585 2924
0776 Beige	0585 2648
0777 Rose	0585 2921

Taralay Impression - Mohair

Colour Reference	Weld Rod Code
0766 Dark	0585 2421
0767 Natural	0585 2762
0769 White	0585 2599

Taralay Impression - Gentlemen

Colour Reference	Weld Rod Code
0770 Clear	0585 2599
0771 Grey	0585 2784
0772 Coffee	0585 2762

Taralay Impression - Kubes

Colour Reference	Weld Rod Code
0747 Olive	0585 2909
0748 Burgundy	0585 2929
0749 Sky	0585 2923
0750 Sun	0585 2248
0751 Taupe	0585 2473
0752 Gold	0585 2422
0753 Grey	0585 0075
0754 Blue	0585 2908
0755 White	0585 2786
0756 Beige	0585 2144

Taralay Impression - Corner

Colour Reference	Weld Rod Code
0728 Offwhite	0585 2865
0729 Metal	0585 0337
0730 Light Beige	0585 2654
0732 Dark Blue	0585 2271
0733 Copper	0585 2916
0739 Anis	0585 2877
0740 Turquoise	0585 2922
0741 Tomette	0585 2928

Taralay Impression - Nest

Colour Reference	Weld Rod Code
0745 Metal	0585 2666
0746 Black	0585 0743
0765 Taupe	0585 2930

Taralay Impression - Rice

Colour Reference	Weld Rod Code
0735 Light Green	0585 2591
0736 Champagne	0585 2481
0737 Souris	0585 2666
0738 Copper	0585 0657
0757 Coquelicot	0585 2460
0758 Sea	0585 2659
0759 Mustard	0585 2900
0762 Brown	0585 0462
0763 Greige	0585 2914

Taralay Impression - Stars

Colour Reference	Weld Rod Code
0743 Baltique	2931
0744 Anthracite	2272
0764 Orange	2927

Taralay Initial - Miami

Colour Reference	Weld Rod Code
0950 Miami Sable	0585 3011
0951 Miami Litchee	0585 2256
0952 Miami Soleil	0585 2900
0963 Miami Perle	0585 2725
0964 Miami Souris	0585 2867
0965 Miami Foret	0585 3028
0966 Miami Abricot	0585 3029
0967 Miami Mer	0585 3027
0968 Miami Ciel	0585 3033
0969 Miami Paon	0585 2966
0970 Miami Taupe	0585 2341

Taralay Initial - Spider

Colour Reference	Weld Rod Code
0954 Spider Dore	0585 2694
0955 Spider Perle	0585 2725
0956 Spider Grenat	0585 2256
0957 Spider Cuivre	0585 2486
0973 Spider Alu	0585 2926
0974 Spider Saphir	0585 3025
0975 Spider Emeraude	0585 3026
0976 Spider Quartz	0585 3032

Taralay Initial - Wood

Colour Reference	Weld Rod Code
0588 Noma Clair	0585 0613
0590 Renzo Steel	0585 2232
0636 Esterel Blond	0585 2224
0698 Noma Naturel	0585 0386
0773 Ranch	0585 0613
0797 Habana Ivory	0585 0242
0799 Filament Light	0585 0613
0826 Filament Grey	0585 2227
0828 Habana Beige	0585 2174
0953 Ranch Anthracite	0585 2232
0959 Bostonian Brown	0585 0462
0960 Bostonian Grey	0585 2573
0961 Bostonian Honey	0585 3030
0977 Twist Grey	0585 2473
0978 Twist Blond	0585 0242
0979 Twist White	0585 0026
0980 Twist Brown	0585 2336

Weld rod references are subject to change, please confirm with your sales advisor at point of ordering.

Weld rod references are subject to change, please confirm with your sales advisor at point of ordering.

Weld Rods

Multilayered Flooring

Taralay Initial - Diversion

Colour Reference	Weld Rod Code
0047 Diversion Ivoire	0585 0097
0049 Diversion Carbone	0585 2232
0515 Diversion Kiwi	0585 2750
0824 Diversion Souris	0585 2701
0825 Diversion Turquoise	0585 2869
0949 Diversion Soleil	0585 3034
0962 Diversion Marine	0585 0584

Taralay Initial - Strada

Colour Reference	Weld Rod Code
0465 Ciment	0585 2473
0790 Chrome	0585 0135
0791 Metallic	0585 2662

Taralay Initial - Urban

Colour Reference	Weld Rod Code
0035 Urban Gris	0585 0016
0037 Urban Souris	0585 0275
0958 Urban Beige	0585 3031

Taralay Libertex - Legend

Colour Reference	Weld Rod Code
1430 Legend Grey	0585 0330
2242 Legend Country	0585 2224
2243 Legend Chestnut	0585 2413

Taralay Libertex - Pure Oak

Colour Reference	Weld Rod Code
0720 Pure Oak Clear	0585 2904
1751 Pure Oak Grey	0585 2227

Taralay Libertex - Skandi Oak

Colour Reference	Weld Rod Code
2244 Skandi Oak Clear	0585 0645
2245 Skandi Oak Natural	0585 2484
2246 Skandi Oak Toffee	0585 2356

Taralay Libertex - Hossegor

Colour Reference	Weld Rod Code
2247 Hossegor Latte	0585 0613

Taralay Libertex - Cacaoon

Colour Reference	Weld Rod Code
2241 Cacaoon Silver Brown	0585 2719

Taralay Libertex - Amsterdam

Colour Reference	Weld Rod Code
2151 Amsterdam Light Grey	H231 2866
2152 Amsterdam Grey	0585 2784
2153 Amsterdam Anthracite	0585 2421

Taralay Libertex - Paros

Colour Reference	Weld Rod Code
2248 Paros Clear	0585 2655

Taralay Libertex - Reflect

Colour Reference	Weld Rod Code
1785 Reflect Earth	0585 2426
2249 Reflect Sea	0585 2908
2250 Reflect Forest	0585 2813
2251 Reflect Sunny	0585 2548
2252 Reflect Flower	0585 2445
2253 Reflect Silver	0585 0151

Nerok - Wood

Colour Reference	Weld Rod Code
0476 Noma Miel	0585 2224
0492 Timber Cabana	0585 2336
0669 Chene Light	0585 2422
0720 Timber Clear	0585 2904
1430 Oak Select Dark Grey	0585 0330
1451 Noma Kola	0585 0613
1518 Factory White	0585 0645
1751 Timber Grey	0585 2661
1893 Harbor Blue	0585 0613
2012 Sherwood Clear	0585 2144
2013 Sherwood Blond	0483 0822
2015 Sherwood Brown	0585 2214
2017 Sherwood Grey	0585 2762
2242 Oak Select Country	0585 2224
2244 Newport Clear	0585 0645
2245 Newport Natural	0585 2484

Nerok - Concrete

Colour Reference	Weld Rod Code
2131 Leone Mouse	0585 2866
2132 Leone Metal	0585 2926
2133 Leone Anthracite	0585 0743
2134 Leone Brown	0585 2341
2135 Leone Cream	0585 3012
2151 Shade Light Grey	0585 2866
2152 Shade Grey	0585 2784
2153 Shade Anthracite	0585 2421
2249 Brooklyn Blue	0585 2908
2253 Brooklyn Silver	0585 0151

Nerok - Pixel

Colour Reference	Weld Rod Code
0597 Pixel Silver	0585 0644
0621 Pixel Vanilla	0585 2350
0632 Pixel Anthracite	0585 0648
0639 Pixel Sand	0585 0242
2175 Pixel Clear	0585 0144
2176 Pixel Taupe	0585 0613
2178 Pixel Paprika	0585 2888
2179 Pixel Black	0585 0743
2181 Pixel Meadow	0585 2451
2182 Pixel Ocean	0585 2830

Compact Linoleum Flooring

DLW Marmorette

Colour Reference	Weld Rod Code
0003 Dark Brown	R898 0003
0018 Lobster Red	R898 0018
0019 Sunset Orange	R898 0019
0022 Autumn Blue	R898 0022
0023 Dusty Blue	R898 0023
0026 Sky Blue	R898 0026
0028 Dive	R898 0028
0040 Light Sahara	R898 0040
0042 Shortcrust	R898 0042
0043 Leaf Green	R898 0043
0045 Sand Beige	R898 0045
0049 Royal Blue	R898 0049
0050 Quartz Grey	R898 0050
0053 Ice Grey	R898 0053
0054 Concrete Patty	R898 0054
0055 Ash Grey	R898 0055
0056 Foggy Blue	R898 0056
0059 Plumb Grey	R898 0059
0070 Rocky Brown	R898 0070
0072 Golden Yellow	R898 0072
0073 Spicy Orange	R898 0073
0075 Light Aurora	R898 0075
0076 Pale Yellow	R898 0076
0083 Jungle	R898 0083
0089 Peacan Pie	R898 0089
0090 Soapstone	R898 0090
0091 Shiitake Mushroom	R898 0091
0092 Beach	R898 0092
0096 Midnight Grey	R898 0096
0098 Desert Beige	R898 0098
0099 Grey Turquoise	R898 0099
0100 Frog Green	R898 0100
0106 Hazelnut Shake	R898 0106
0108 Mokka Brown	R898 0108
0117 Mandarin Orange	R898 0117
0118 Chili Red	R898 0118
0119 Terracotta	R898 0119
0121 Blue Eyes	R898 0121
0122 Fluffy Blue	R898 0122
0128 Violet	R898 0128
0129 Curacao Petrol	R898 0129
0130 Antique Green	R898 0130
0132 Lime Green	R898 0132
0136 Turquoise Bay	R898 0136
0138 Khaki	R898 0138
0145 Banana White	R898 0145
0146 Beeswax Beige	R898 0146
0148 Ink Blue	R898 0148
0149 Dark Blue	R898 0149
0153 Greystone Grey	R898 0153
0155 Smoked Pearl	R898 0155
0158 Tabac Grey	R898 0158
0160 Industrial Grey	R898 0160
0164 Milk Coffee	R898 0164
0166 Clay	R898 0166
0172 Papaya Orange	R898 0172

DLW Marmorette *contd.*

Colour Reference	Weld Rod Code
0173 Melon Orange	R898 0173
0211 Pink	R898 0211
0224 Mystery Blue	R898 0224
0243 Marble Beige	R898 0243
0251 Cream	R898 0251
0252 Light Grey	R898 0252
0253 Pebble Grey	R898 0253
0254 Mineral Grey	R898 0254

DLW Colorette

Colour Reference	Weld Rod Code
0001 Banana Yellow	R897 0001
0004 Bluebird	R897 0004
0006 Vivid Green	R897 0006
0012 Light Beige	R897 0012
0016 Deep Orange	R897 0016
0043 Light Mud	R897 0143
0052 Oxid Grey	R897 0052
0058 Aluminium Grey	R897 0058
0059 Stone Grey	R897 0159
0071 Straw Beige	R897 0071
0073 Sand Yellow	R897 0273
0080 Elephant Grey	R897 0080
0081 Private Black	R897 0081
0110 Cadillac Pink	R897 0110
0118 Power Red	R897 0218
0123 Poppy Blue	R897 0123
0132 Spicy Green	R897 0232
0170 Kumquat Orange	R897 0170
0171 Sunrise Orange	R897 0171

DLW Uni Walton

Colour Reference	Weld Rod Code
0010 Pompeji Red	R897 0010
0035 Racing Green	R897 0035
0043 Neutral Beige	R897 0343
0058 Clay Grey	R897 0258
0059 Frost Grey	R897 0259
0060 Deep Brown	R897 0060
0062 Mediterranean Orange	R897 0062
0080 Black	R897 0180
0081 Nickel Grey	R897 0181
0082 Broken Grey	R897 0082
0083 Architects Grey	R897 0183
0085 Warm Concrete Grey	R897 0085
0088 Chestnut	R897 0088
0090 Olive	R897 0290
0095 Spring Blue	R897 0295
0100 Ocean Blue	R897 0200

Sports and Fitness Solutions

Taraflex Comfort / Performance / Evolution / Surface

Colour Reference	Weld Rod Code
2404 London Light Blue	H209 2404
3764 Taupe	H209 2827
5742 Wood Oak Design	H209 2477
6038 Terracotta	H209 6038
6146 Coral	H209 6146
6159 Pink	H209 6159
6180 Red	H209 6180
6211 Gold	H209 6211
6347 Beige	H209 6347
6350 Light Cherry Design	H209 2835
6381 Maple Design	H209 6381
6430 Blue	H209 6430
6431 Teal	H209 6431
6445 Lagoon	H209 6445
6557 Forest	H209 2826
6559 Spring	H209 6559
6570 Mint Green	H209 6570
6758 Silver Gray	H209 6758
6830 Black	H209 6830
6873 Anthracite	H209 6873

Taraflex Multi-Use

Colour Reference	Weld Rod Code
2790 Dark Grey	H209 0439
2791 Light Grey	H209 0586
3708 Wood Grey	H209 2323
4331 Wood Natural	H209 2477
4453 Wood Blue	H209 2478
5742 Wood Oak	H209 2477
6180 Red	H209 6180
6350 Light Cherry	H209 2835
6430 Blue	H209 6430
6557 Forest	H209 2826
6758 Silver Gray	H209 6758
6844 Black Strips	H209 2681
8069 Wood Chocolate	H209 2684

Taraflex Recreation

Colour Reference	Weld Rod Code
2402 Azul	H209 6445
2711 Gris	H209 6758
6058 American Oak	H209 2694
6062 Canadian Maple	H209 0485
6154 Roja	H209 6109
6157 Rosa	H209 6146
6160 Naranja	H209 6134
6556 Verde	H209 6512
6563 Menta	H209 6570
6614 Oceano	H209 6430

Weld rod references are subject to change, please confirm with your sales advisor at point of ordering.

Weld rod references are subject to change, please confirm with your sales advisor at point of ordering.

Installation

Refer to our installation techniques on: www.gerflor.co.uk



Maintenance

Surface Treatments




The original no-polish-for-life solution.

This unique UV-cured polyurethane surface treatment protects the floorcovering and eliminates the need for costly emulsion dressings throughout the life of the product.


Developed exclusively by Gerflor back in 1987, Protecsol® is a permanent, factory applied treatment which has been proven independently to reduce both the time and costs required to protect standard, resilient floorcoverings.

Gerflor is an innovative manufacturer and continuously strives through heavy investment in R&D to meet and exceed its customers expectations both in terms of product quality and in low environmental impact.

Exclusive to Gerflor

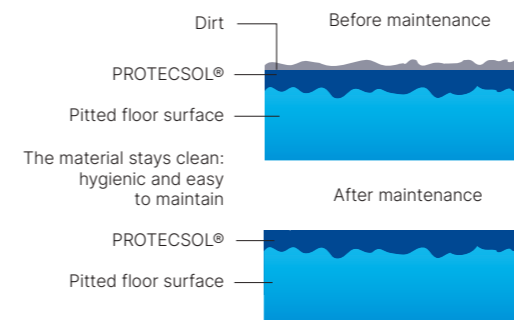

Low environmental impact

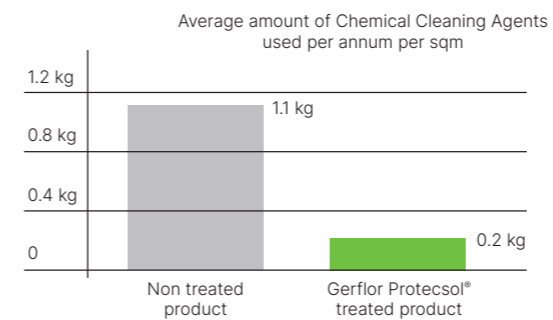

All the advantages of Protecsol®, and more!

PROTECSOL® 2 technology combines all the advantages of Protecsol®, tested and approved over 20 years ago: ease of maintenance, no need for wax and polish for life, water and detergent savings, plus two additional benefits:

① The best stain shield

Highly durable:

Exclusive surface treatment applied by UV lasercross-linking provides superior durability and an even surface thickness, creating an impenetrable barrier against stains and chemicals.


Longer life expectancy.



Water-repellent effect:

The surface treatment creates a 100% non-porous barrier to prevent all liquids and chemicals from penetrating the materials, remaining on the surface.

Simple and easy stain removal.



② Matt effect for enhanced design




SparClean®

New generation of surface treatment for Tarasafe safety flooring.

SparClean® is a powder coated treatment that when heated forms a totally smooth surface between the mineral crystal particles, eliminating dirt traps and setting new standards for cleanliness and hygiene. The unique method of manufacture ensures that the slip resistance of the Tarasafe safety flooring is not impaired in any way, yet provides a safety floor that is easy to clean.

SparClean® is a permanent surface treatment that gives extreme resistance to soiling and staining, offers excellent resistance to chemicals and ensures long term product durability.

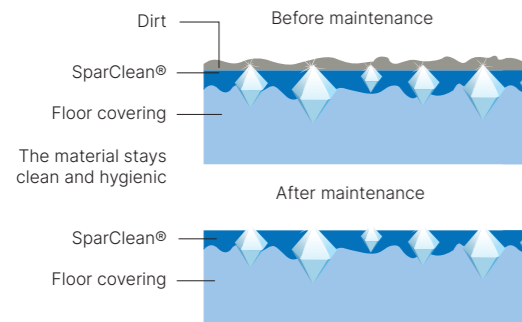

evercare™ TECHNOLOGY

An exclusive patented technology by Gerflor.

The best chemical stain resistance surface treatment.

Highly durable:

Exclusive surface treatment applied by UV laser cross-linking provides superior durability and an even surface thickness, creating an impenetrable barrier against stains and chemicals found in healthcare like betadine, eosin or anti-bacterial hand gel.

Longer life expectancy.



100% non-porous surface:

The surface treatment creates a 100% non-porous barrier to all liquids and chemicals, keeping all stains floating on the surface.

Simple and easy stain removal.



Protecshield™

The NEW surface treatment by Gerflor.


This high performance polyurethane surface treatment (Protecshield™) provides ease of maintenance, prevents micro-scratches and has a ultra matt surface finish.



Improved Performance




Microscopic view (x5)

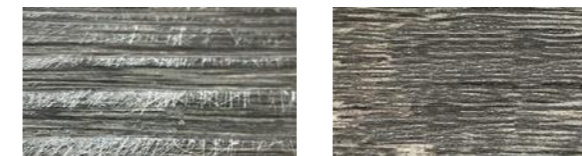

Standard varnish

Protecshield™

Enhanced Durability

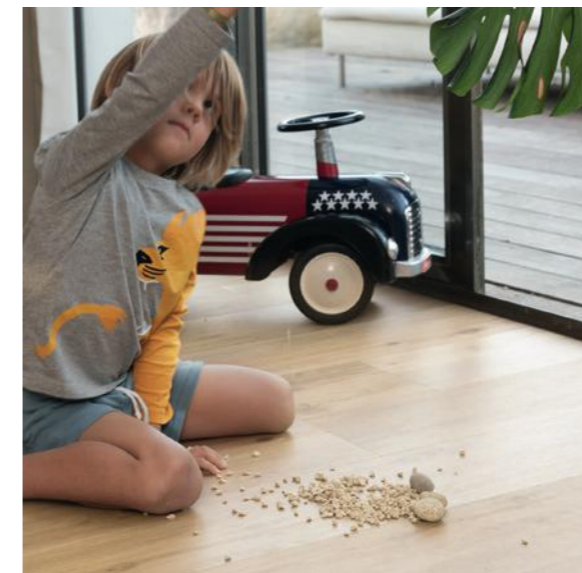

Carpets

Maintain Appearance

- > Carpet should be vacuumed daily using a heavy duty upright vacuum cleaner.
- > Deep Cleaning to remove bacteria and viruses
- > Carpet should be deep cleaned on a regular basis with frequency depending on the type of area and volume of traffic
- > Gradus has worked with Seldon Research to establish a range of cleaning products developed to disinfect against bacteria and viruses
- > Contact Gradus for more information



Daily cleaning to remove surface soil



PUR+

Polyurethane surface treatment.

PUR+ surface treatment provides excellent cleaning characteristics and improved resistance to scratching. It significantly delays application of wax and provides excellent resistance to chemicals.

PUR Polyurethane surface treatment.





PUR surface treatment is a good foundation for routine maintenance and avoids the immediate use of an acrylic emulsion after installation.

PU Protective PU factory seal.

This factory coating initially applied is an installation protection and a good foundation for routine maintenance. Acrylic emulsion / polish is required after installation.


New design, new navigation!

A website you can access on your tablet or smartphone everywhere!

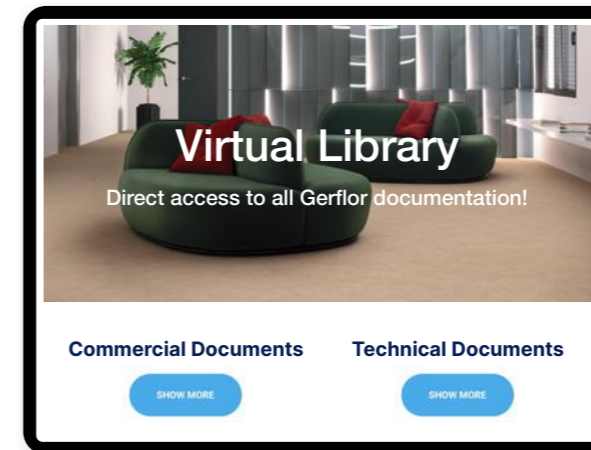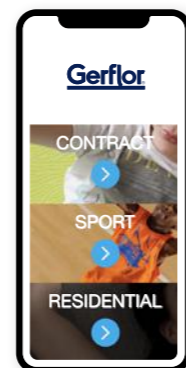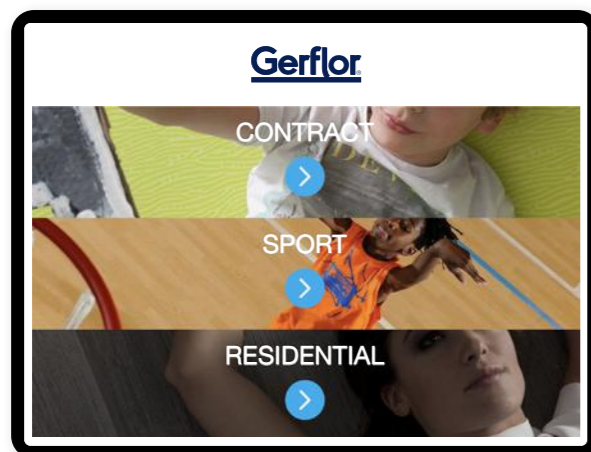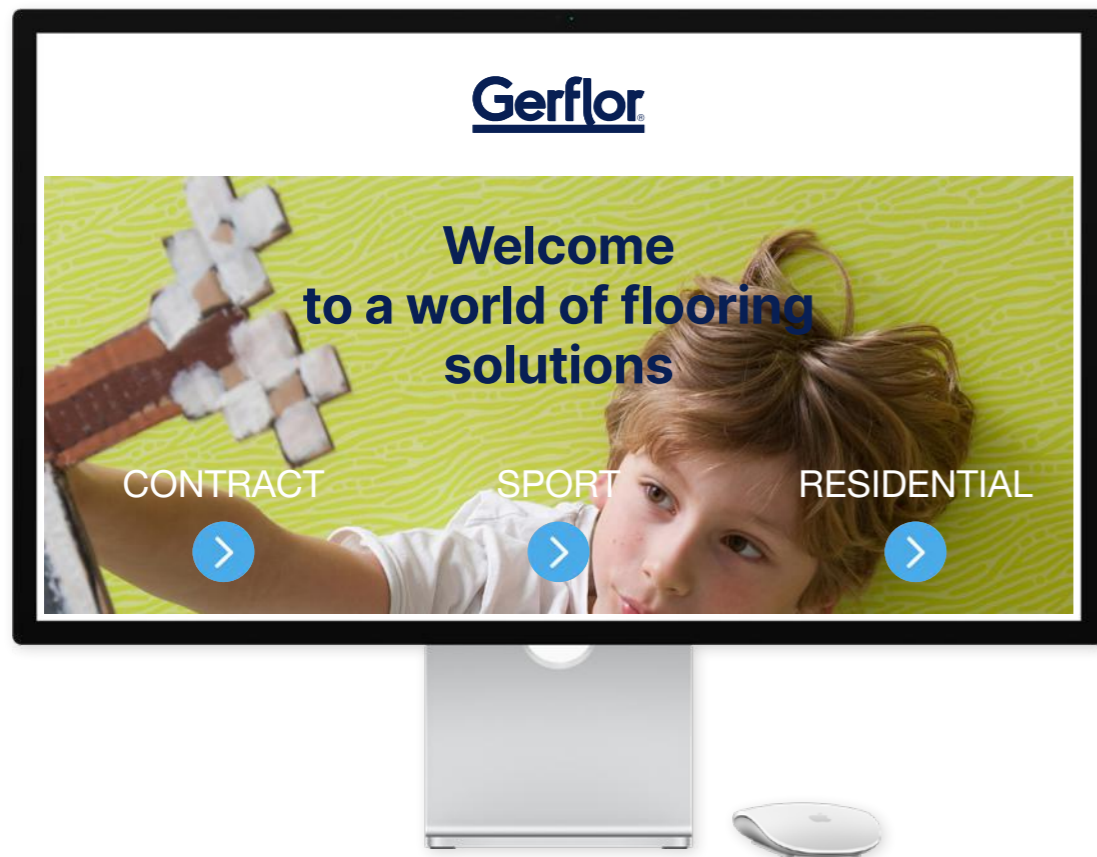


1 Virtual Library

Access to all commercial and technical documentation that will help you developing your projects.

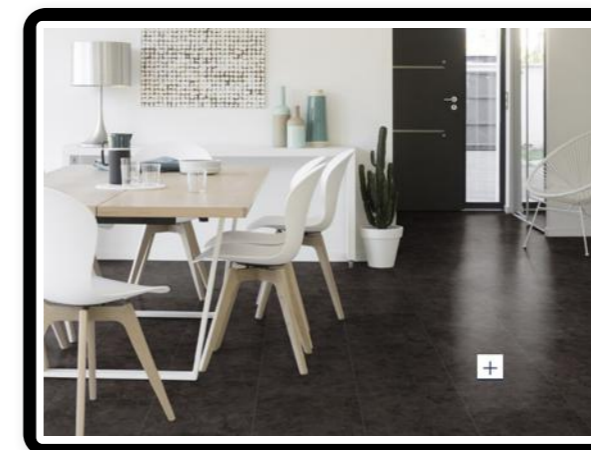

2 Interior Designer

The Interior Designer provides you a real time simulation of the floor selected, either in your own photo or in a pictures' gallery.

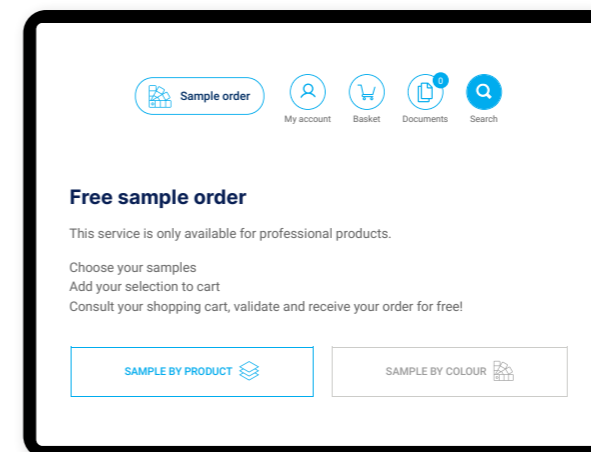

3 Free Samples

Samples of our products are readily available on request and we aim to process your order within 24 hours.